

CONTRATO DE "ADQUISICIÓN DE EQUIPO DE COMPUTO Y TECNOLOGÍAS DE LA INFORMACIÓN PARA EL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL", QUE CELEBRAN POR UNA PARTE EL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, A QUIEN EN LO SUCESIVO SE LE DENOMINARÁ "EL INSTITUTO" REPRESENTADO POR EL LIC. MANUEL AGUILERA VITAL, EN SU CARÁCTER DE DIRECTOR DE ASUNTOS JURÍDICOS, ASISTIDO POR EL L.A. ELÍAS DE JESÚS MARZUCA SÁNCHEZ, COORDINADOR DE PLANEACIÓN, INFORMACIÓN Y EVALUACIÓN; Y POR OTRA PARTE LA EMPRESA "INTEGRADORA EN INFRAESTRUCTURA TECNOLÓGICA IITESA, S.A. DE C.V." REPRESENTADA POR EL ING. MIGUEL ANGEL FUENTES OLIVARES, A QUIEN EN LO SUCESIVO SE LE DENOMINARÁ "EL PROVEEDOR DEL BIEN"; DE CONFORMIDAD CON LAS SIGUIENTES DECLARACIONES Y CLÁUSULAS:

DECLARACIONES

I "EL INSTITUTO" A TRAVÉS DE SU REPRESENTANTE.

- I.1 QUE ES UN ORGANISMO DESCENTRALIZADO DE LA ADMINISTRACIÓN PÚBLICA DEL DISTRITO FEDERAL, CON PERSONALIDAD JURÍDICA Y PATRIMONIO PROPIO; CREADO POR EL C. JEFE DE GOBIERNO DEL DISTRITO FEDERAL, MEDIANTE DECRETO DE FECHA DIECIOCHO DE AGOSTO DE MIL NOVECIENTOS NOVENTA Y OCHO, PUBLICADO EN LA GACETA OFICIAL DEL DISTRITO FEDERAL, EL VEINTINUEVE DE SEPTIEMBRE DEL MISMO AÑO Y DE ACUERDO CON LO ESTABLECIDO EN LOS ARTÍCULOS 40, 46 Y 48 DE LA LEY ORGÁNICA DE LA ADMINISTRACIÓN PÚBLICA DEL DISTRITO FEDERAL; ASÍ COMO DE CONFORMIDAD CON LOS ARTÍCULOS 1º, 2º Y 3º DE SU DECRETO DE CREACIÓN, VIGENTE EL DIECISÉIS DE OCTUBRE DEL AÑO MIL NOVECIENTOS NOVENTA Y OCHO, QUE TIENE POR OBJETO DISEÑAR, ELABORAR, PROPONER, PROMOVER, COORDINAR, EJECUTAR Y EVALUAR LAS POLÍTICAS Y PROGRAMAS DE VIVIENDA ENFOCADOS PRINCIPALMENTE A LA ATENCIÓN DE LA POBLACIÓN DE ESCASOS RECURSOS ECONÓMICOS DEL DISTRITO FEDERAL, EN EL MARCO GENERAL DE DESARROLLO DEL DISTRITO FEDERAL VIGENTE Y DE LOS PROGRAMAS QUE SE DERIVEN DE ÉL.
- I.2 QUE A TRAVÉS DEL OFICIO SIN NÚMERO DE FECHA DE 21 DE JULIO DEL AÑO 2018, EL C. JOSÉ RAMÓN AMIEVA GÁLVEZ EN SU CARÁCTER DE JEFE DE GOBIERNO DE LA CIUDAD DE MÉXICO, CON FUNDAMENTO EN LOS ARTÍCULOS ÚNICO Y PRIMERO, SEGUNDO Y DÉCIMO CUARTO TRANSITORIOS DEL DECRETO POR EL QUE SE DECLARAN REFORMADAS Y DEROGADAS DIVERSAS DISPOSICIONES DE LA CONSTITUCIÓN POLÍTICA DE LOS ESTADOS UNIDOS MEXICANOS, EN MATERIA DE LA REFORMA POLÍTICA DE LA CIUDAD DE MÉXICO, PUBLICADO EN EL DIARIO OFICIAL DE LA FEDERACIÓN EL 29 DE ENERO DE 2016; 122 APARTADO A, FRACCIÓN III DE LA CONSTITUCIÓN POLÍTICA DE LOS ESTADOS UNIDOS MEXICANOS; 8, FRACCIÓN II, 67, FRACCIÓN V, 87 Y 98 DEL ESTATUTO DE GOBIERNO DEL DISTRITO FEDERAL; 2º, ÚLTIMO PÁRRAFO, 3, FRACCIÓN IX Y 5 DE LA LEY ORGÁNICA DE LA ADMINISTRACIÓN PÚBLICA DE LA CIUDAD DE MÉXICO; Y ARTÍCULO NOVENO DEL DECRETO QUE CREA EL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL; CON ESTA FECHA TUVO A BIEN NOMBRAR COMO DIRECTORA GENERAL DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL A LA LIC. ITZEL ARIZABALO PRIEGO.
- I.3 QUE SU H. CONSEJO DIRECTIVO DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, MEDIANTE ACUERDO INVI110EXT3233 TOMADO EN SU CENTÉSIMO DÉCIMO SESIÓN EXTRAORDINARIA, CELEBRADA EL DÍA 10 DE AGOSTO DE 2018, CON FUNDAMENTO EN EL ARTÍCULO NOVENO DEL DECRETO QUE CREA EL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, PUBLICADO EN LA GACETA OFICIAL DEL DISTRITO FEDERAL DE FECHA 29 DE SEPTIEMBRE DE 1998, TOMA CONOCIMIENTO DEL NOMBRAMIENTO DE LA LIC. ITZEL ARIZABALO PRIEGO COMO DIRECTORA GENERAL DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL A PARTIR DEL VEINTIUNO DE JULIO DE DOS MIL DIECIOCHO.
- I.4 QUE SU H. CONSEJO DIRECTIVO DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, MEDIANTE ACUERDO INVI73ORD2981 TOMADO EN SU SEPTUAGÉSIMA TERCERA SESIÓN ORDINARIA, CELEBRADA EL DÍA VEINTICUATRO DE FEBRERO DE DOS MIL DIECISIETE, AUTORIZÓ LOS NOMBRAMIENTOS DE LOS SERVIDORES PÚBLICOS CC. LIC. FERNANDO JAVIER LINARES SALVATIERRA COMO DIRECTOR EJECUTIVO DE ASUNTOS JURÍDICOS E INMOBILIARIOS, Y LIC. MANUEL AGUILERA VITAL COMO DIRECTOR DE ASUNTOS JURÍDICOS.
- I.5.- QUE SU H. CONSEJO DIRECTIVO, MEDIANTE ACUERDO INVI110EXT3235A TOMADO EN SU CENTÉSIMO DÉCIMO SESIÓN EXTRAORDINARIA, CELEBRADA EL DÍA DIEZ DE AGOSTO DE DOS MIL DIECIOCHO, AUTORIZÓ AL DIRECTOR GENERAL DEL ORGANISMO, EN REPRESENTACIÓN DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, OTORQUE PODER GENERAL PARA PLEITOS Y COBRANZAS Y ACTOS DE ADMINISTRACIÓN A FAVOR DE LOS CC. LIC. FERNANDO JAVIER LINARES SALVATIERRA EN SU CARÁCTER DE DIRECTOR EJECUTIVO DE ASUNTOS JURÍDICOS E INMOBILIARIOS Y AL LIC. MANUEL AGUILERA VITAL EN SU CARÁCTER DE DIRECTOR DE ASUNTOS JURÍDICOS. POR LO QUE LA LIC. ITZEL ARIZABALO PRIEGO, DIRECTORA GENERAL DEL ORGANISMO, MEDIANTE ESCRITURA PÚBLICA NÚMERO CUATRO MIL SETECIENTOS CUARENTA Y CINCO, DE FECHA DIECISIETE DE AGOSTO DE DOS MIL DIECIOCHO, PASADA ANTE LA FE DEL LICENCIADO JESUS CASTRO FIGUEROA, NOTARIO PÚBLICO NÚMERO TREINTA Y OCHO DE LA CIUDAD DE MÉXICO, EMITIDA CON APOYO EN EL ACUERDO ANTES PRECISADO CON ANTERIORIDAD Y EN TÉRMINOS DE LO DISPUESTO POR EL ARTÍCULO SEXTO, FRACCIÓN XXI DEL DECRETO DE CREACIÓN DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, PUBLICADO EN LA GACETA OFICIAL DEL DISTRITO FEDERAL, EL VEINTINUEVE DE SEPTIEMBRE DE

MIL NOVECIENTOS NOVENTA Y OCHO, LE CONFIRÓ FACULTADES AL DIRECTOR DE ASUNTOS JURÍDICOS EL LICENCIADO MANUEL AGUILERA VITAL, SUFICIENTES PARA FORMALIZAR EL PRESENTE INSTRUMENTO.

- I.6 QUE SE REQUIERE DE LA ADQUISICIÓN DE EQUIPO DE COMPUTO Y TECNOLOGÍAS DE LA INFORMACIÓN PARA EL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, CONFORME A LO SOLICITADO POR LA COORDINACIÓN DE PLANEACIÓN, INFORMACIÓN Y EVALUACIÓN EN "EL INSTITUTO", MEDIANTE OFICIOS NÚMERO DG/CPIE/00513/2018 DE FECHA 19 DE JULIO DE 2018 Y DG/CPIE/00735/2018 DE FECHA 15 DE OCTUBRE DE 2018.
- I.7 QUE DE CONFORMIDAD CON LOS ARTÍCULOS 134 DE LA CONSTITUCIÓN POLÍTICA DE LOS ESTADOS UNIDOS MEXICANOS, 27 INCISO C), 28, 52 Y 54 FRACCIÓN II BIS DE LA LEY DE ADQUISICIONES PARA EL DISTRITO FEDERAL, SE REALIZÓ LA ADJUDICACIÓN.
- I.8 QUE EN TÉRMINOS DEL ARTÍCULO 28 DE LA LEY DE ADQUISICIONES PARA EL DISTRITO FEDERAL, ESTE ORGANISMO CUENTA CON LA SUFICIENCIA PRESUPUESTAL OTORGADA MEDIANTE OFICIOS NÚMERO DEAF/DF/003351/2018 DE FECHA 27 DE JUNIO DE 2018 Y OM/DGRMSG/2937/2018, PARA CUBRIR EL PAGO DE RECURSOS DERIVADO DE LOS COMPROMISOS QUE EN ESTE INSTRUMENTO SE ESTABLECEN, CON CARGO A LA PARTIDA PRESUPUESTAL 5151 "EQUIPO DE CÓMPUTO Y DE TÉCNOLOGÍAS DE LA INFORMACIÓN".
- I.9 QUE CON FUNDAMENTO EN EL ARTÍCULO 29, FRACCIÓN V DEL DECRETO DE PRESUPUESTO DE EGRESOS DE LA CIUDAD DE MÉXICO PARA EL EJERCICIO FISCAL 2018, EN RELACIÓN CON EL NUMERAL 7, INCISO A) DEL PROCEDIMIENTO PARA LA AUTORIZACIÓN DE ADQUISICIÓN DE BIENES RESTRINGIDOS Y SU CLASIFICADOR VIGENTE, SE CUENTA CON LA OPINIÓN FAVORABLE DE LA DIRECCIÓN GENERAL DE RECURSOS MATERIALES Y SERVICIOS GENERALES DE LA OFICIALÍA MAYOR DE LA CIUDAD DE MÉXICO, MEDIANTE OFICIO NÚMERO OM/DGRMSG/3584/2018 DE FECHA 15 DE NOVIEMBRE DE 2018.
- I.10 QUE PARA LOS EFECTOS LEGALES A QUE TENGA LUGAR ESTE CONTRATO SE SEÑALA COMO DOMICILIO EL UBICADO EN CANELA NÚMERO 660, COLONIA GRANJAS MÉXICO, DELEGACIÓN IZTACALCO, CÓDIGO POSTAL 08400, CIUDAD DE MÉXICO.

II.- DECLARA "EL PROVEEDOR DEL BIEN", A TRAVÉS DE SU REPRESENTANTE LEGAL:

- II.1 QUE ES UNA SOCIEDAD ANÓNIMA DE CAPITAL VARIABLE, CONSTITUIDA CONFORME A LAS LEYES MEXICANAS, COMO LO ACREDITA LA ESCRITURA PÚBLICA NO. [REDACTED] PASADA ANTE LA FE DEL C. ALFREDO AYALA HERRERA, NOTARIA NÚMERO DOSCIENTOS TREINTA Y SIETE DEL DISTRITO FEDERAL.
- II.2 QUE SU REPRESENTANTE LEGAL, EL ING. MIGUEL ANGEL FUENTES OLIVARES, CUENTA CON PODER GENERAL PARA PLEITOS Y COBRANZAS, ASI COMO PODER GENERAL PARA ACTOS DE ADMINISTRACIÓN, EN TÉRMINOS DE LA ESCRITURA PÚBLICA NO. [REDACTED] PASADA ANTE LA FE DEL C. ALFREDO AYALA HERRERA, NOTARIA NÚMERO DOSCIENTOS TREINTA Y SIETE DEL DISTRITO FEDERAL, MANIFESTANDO BAJO PROTESTA DE DECIR VERDAD, QUE DICHO PODER NO LE HA SIDO LIMITADO, MODIFICADO, O REVOCADO EN FORMA ALGUNA.
- II.3 QUE TIENE COMO ACTIVIDAD COTIDIANA OTORGAR SERVICIOS EN INFRAESTRUCTURA RELACIONADOS CON LA TECNOLOGÍA DE LA INFORMÁTICA ASÍ COMO CUALQUIER SERVICIO RELACIONADO A ESTOS.
- II.4 QUE OTORGA SU CONSENTIMIENTO INEQUÍVOCO Y EXPRESO DE LA NO PUBLICACIÓN DE SUS DATOS PERSONALES DE CONFORMIDAD A LOS ARTÍCULOS 9, 10, 12 Y 16 DE LA LEY DE PROTECCIÓN DE DATOS PERSONALES EN POSESIÓN DE SUJETOS OBLIGADOS DE LA CIUDAD DE MÉXICO, ENTENDIÉNDOSE POR DATOS PERSONALES LO ESTABLECIDO EN EL ARTÍCULO 3 DE LAS MISMA LEY.
- II.5 QUE SU REGISTRO FEDERAL DE CONTRIBUYENTES EXPEDIDO POR LA SECRETARÍA DE HACIENDA Y CRÉDITO PÚBLICO ES IIT050322DWA.
- II.6 MANIFIESTE BAJO PROTESTA DE DECIR VERDAD, QUE CONOCE Y QUE NI ÉL, NI SUS SOCIOS O DIRECTIVOS, NI SUS CÓNYUGES DE TODOS ELLOS TIENEN LAZOS DE CONSANGUINIDAD NI DE AFINIDAD HASTA EL CUARTO GRADO, NI RELACIONES DE CARÁCTER COMERCIAL CON PERSONA ALGUNA QUE LABORE EN LA ADMINISTRACIÓN PÚBLICA DE LA CIUDAD DE MÉXICO, ASÍ COMO EL CONTENIDO Y ALCANCE DE LOS ARTÍCULOS 33 FRACCIÓN XXII Y 39 DE LA LEY DE ADQUISICIONES PARA EL DISTRITO FEDERAL.
- II.7 QUE CUENTA CON LA CAPACIDAD LEGAL, TÉCNICA Y ECONÓMICA, ASI COMO LA ORGANIZACIÓN PARA CELEBRAR EL PRESENTE COTNRATO DUPLICADO.

- II.8 PARA EFECTOS DE LO SEÑALADO EN EL ARTÍCULO 56 INCISO C) DEL CÓDIGO FISCAL DEL DISTRITO FEDERAL Y 51 ÚLTIMO PÁRRAFO DE LA LEY DE PRESUPUESTO Y GASTO EFICIENTE DEL DISTRITO FEDERAL, "EL PROVEEDOR DEL BIEN" MANIFIESTA BAJO PROTESTA DE DECIR VERDAD QUE ESTA AL CORRIENTE EN EL PAGO DE SUS IMPUESTOS, DERECHOS, APROVECHAMIENTOS Y PRODUCTOS REFERIDOS EN EL CÓDIGO FISCAL DEL DISTRITO FEDERAL.
- II.9 QUE SU DOMICILIO LEGAL SE ENCUENTRA UBICADO EN AVENIDA BORDO 34 A, COL. SANTA ÚRSULA COAPA DEL. COYOACÁN C.P. 04850, CIUDAD DE MÉXICO, EN EL CUAL REALIZA NORMALMENTE LAS ACTIVIDADES QUE SON MATERIA DE ESTE INSTRUMENTO, MISMO QUE SEÑALA PARA TODOS LOS FINES LEGALES DE ESTE CONTRATO.
- II.10 QUE CUENTA CON CONSTANCIA AL REGISTRO DE PADRÓN DE PROVEEDORES DE LA ADMINISTRACIÓN PÚBLICA DE LA CIUDAD DE MÉXICO, OTORGADA EL DÍA TRECE DE NOVIEMBRE DE DOS MIL DIECIOCHO Y CON UNA VIGENCIA HASTA EL TRECE DE NOVIEMBRE DE DOS MIL DIECINUEVE, MEDIANTE FOLIO 0JN4Z41SZ6H18L2-FUA5C94YU002X26.

III.- DECLARAN AMBAS PARTES:

- III.1 QUE EL PRESENTE CONTRATO SE REGULA POR LA LEY DE ADQUISICIONES PARA EL DISTRITO FEDERAL, SU REGLAMENTO Y DEMÁS DISPOSICIONES APLICABLES.
- III.2 QUE EN ESTE ACTO SE RECONOCEN MUTUAMENTE LA PERSONALIDAD CON QUE SE OSTENTAN Y LA CAPACIDAD LEGAL PARA CELEBRAR EL PRESENTE CONTRATO.
- III.3 QUE MANIFIESTAN BAJO PROTESTA DE DECIR VERDAD QUE EN ESTE CONTRATO NO EXISTE DOLO, LESIÓN NI MALA FE Y QUE LO CELEBRAN DE ACUERDO CON SU LIBRE VOLUNTAD.
- III.4 PARA EFECTOS DE LO ESTABLECIDO EN LOS "LINEAMIENTOS PARA LA PRESENTACIÓN DE DECLARACIÓN DE INTERESES Y MANIFESTACIÓN DE NO CONFLICTO DE INTERESES A CARGO DE LAS PERSONAS SERVIDORAS PÚBLICAS DE LA ADMINISTRACIÓN PÚBLICA DEL DISTRITO FEDERAL Y HOMÓLOGOS QUE SE SEÑALAN" MANIFIESTAN QUE DERIVADO DEL PRESENTE ACTO JURÍDICO NO SE CONFIGURA CONFLICTO DE INTERESES ALGUNO.

EXPRESANDO LO ANTERIOR, LAS PARTES SE OBLIGAN AL TENOR DE LAS SIGUIENTES.

CLÁUSULAS

PRIMERA.- OBJETO DEL CONTRATO.- "EL INSTITUTO" ENCOMIENDA A "EL PROVEEDOR DEL BIEN", Y ÉSTE ACEPTA Y SE OBLIGA A ENTREGAR UN SWITCH CORE DE 48 PUERTOS, MISMO QUE HA QUEDADO DEBIDAMENTE ESPECIFICADO EN CUANTO A SU TEMA, DURACIÓN, EN EL ANEXO TÉCNICO Y EN LA PROPUESTA DE "EL PROVEEDOR DEL BIEN" PRESENTADA DE FECHA 12 DE NOVIEMBRE DE 2018, LOS CUALES FIRMADOS POR AMBAS PARTES FORMA PARTE INTEGRAL DEL PRESENTE CONTRATO.

SEGUNDA.- MONTO DEL CONTRATO.- LAS PARTES CONVIENEN QUE "EL INSTITUTO" PAGARÁ A "EL PROVEEDOR DEL BIEN" COMO PAGO DEL BIEN OBJETO DEL PRESENTE CONTRATO, LA CANTIDAD DE \$789,644.83 (SETECIENTOS OCHENTA Y NUEVE MIL SEISCIENTOS CUARENTA Y CUATRO PESOS 83/100 M.N.), MÁS EL IMPUESTO AL VALOR AGRAGADO DE \$126,343.17 (CIENTO VEINTISEIS MIL TRESCIENTOS CUARENTA Y TRES PESOS 17/100 M.N.); DANDO UN TOTAL DE \$915,988.00 (NOVECIENTOS QUINCE MIL NOVECIENTOS OCHENTA Y OCHO PESOS 00/100 M.N.) INCLUYENDO EL IMPUESTO AL VALOR AGREGADO.

LAS PARTES CONVIENEN QUE EL PRECIO EN ESTE CONTRATO, CUBRE EL COSTO DE TODOS LOS GASTOS QUE SE REQUIERAN PARA LA ENTREGA DEL BIEN CONTRATADO.

LAS PARTES CONVIENEN QUE EL IMPORTE PRECISADO EN ESTA CLÁUSULA SERÁ FIJO Y NO SE RECONOCERÁN INCREMENTOS AL MISMO, DURANTE LA VIGENCIA DEL PRESENTE CONTRATO.

LAS PARTES CONVIENEN EN QUE NO SE OTORGARÁ ANTICIPO, PARA LA ENTREGA DEL BIEN QUE SE LE ENCOMIENDAN A "EL PROVEEDOR DEL BIEN".

EN CASO DE QUE LO SOLICITE "EL INSTITUTO", "EL PROVEEDOR DEL BIEN" PODRÁ OTORGAR INCREMENTO EN LA CANTIDAD DEL BIEN SOLICITADO MEDIANTE MODIFICACIONES AL CONTRATO VIGENTE, SIEMPRE Y CUANDO EL MONTO TOTAL DE LAS MODIFICACIONES NO REBASAN EN SU CONJUNTO EL 25% (VEINTICINCO POR CIENTO) DEL TOTAL DEL CONTRATO QUE SE ENCUENTREN EN EL MISMO EJERCICIO PRESUPUESTAL Y QUE EL PRECIO Y DEMÁS CONDICIONES DEL BIEN SEA IGUAL AL INICIALMENTE PACTADO, DEBIÉNDOSE AJUSTAR LAS GARANTÍAS DE CUMPLIMIENTO DE CONTRATO, EN SU CASO.

TERCERA.- FORMA DE PAGO.- LAS PARTES CONVIENEN EN QUE EL IMPORTE ESTIPULADO EN LA CLÁUSULA QUE ANTECEDE, SERÁ LIQUIDADO A "EL PROVEEDOR DEL BIEN", DE ACUERDO A LOS ENTREGABLES ESTABLECIDOS EN EL ANEXO TÉCNICO QUE SE ADJUNTA AL PRESENTE, Y QUE FIRMADO POR AMBAS PARTES FORMA PARTE DEL PRESENTE CONTRATO. EL PAGO SE REALIZARÁ DENTRO DE LOS 20 DÍAS NATURALES POSTERIORES A LA FECHA DE ACEPTACIÓN DE LA FACTURA QUE AMPARE EL PAGO DEL BIEN, LA CUAL DEBERÁ EXPEDIRSE A NOMBRE DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, ESTAR DEBIDAMENTE REQUISITADA Y CUMPLA CON LOS REQUISITOS FISCALES QUE MARCA LA LEY, A PLENA SATISFACCIÓN DE "EL INSTITUTO", LA CUAL DEBE SER VALIDADA POR LA COORDINACIÓN DE PLANEACIÓN, INFORMACIÓN Y EVALUACIÓN. EL PAGO SE REALIZARÁN DE LA SIGUIENTE FORMA:

SE PAGARÁ UN 80% DEL MONTO TOTAL PRESENTADO EN SU OFERTA ECONÓMICA, UNA VEZ QUE EL EQUIPO SEA VALIDADO Y OBTENGA EL VISTO BUENO DEL PERSONAL DE INFORMÁTICA Y SEA INGRESADO EN EL ALMACÉN CENTRAL DEL INSTITUTO.

SE PAGARÁ UN 20% UNA VEZ QUE EL EQUIPO SE HAYA PREPARADO, INSTALADO, CONFIGURADO Y PUESTA A PUNTO EN LA INFRAESTRUCTURA DE RED DEL INSTITUTO EN COORDINACIÓN CON EL PERSONAL DE LA JUD DE INFORMÁTICA, DE ACUERDO A LO ESTABLECIDO EN LA ESPECIFICACIÓN NÚMERO 24 DE LOS REQUERIMIENTOS TÉCNICOS, DEL ANEXO TECNICO UNO.

AMBAS PARTES CONVIENEN QUE EN CASO DE EXISTIR PAGOS EN EXCESO A "EL PROVEEDOR DEL BIEN", ESTE QUEDA OBLIGADO A REINTEGRAR LOS REMANENTES A "EL INSTITUTO" MÁS LOS INTERESES CORRESPONDIENTES DE CONFORMIDAD A LO ESTABLECIDO EN LOS PÁRRAFOS SEGUNDO Y TERCERO DEL ARTÍCULO 64 DE LA LEY DE ADQUISICIONES PARA EL DISTRITO FEDERAL.

LAS PARTES CONVIENEN QUE EL PAGO SERÁ A TRAVÉS DE DEPÓSITO INTERBANCARIO EN CUENTA DE CHEQUES A NOMBRE DE "EL PROVEEDOR DEL BIEN".

CUARTA.- VIGENCIA DEL CONTRATO.- LA VIGENCIA SERÁ A PARTIR DEL 16 DE NOVIEMBRE Y HASTA EL 31 DE DICIEMBRE DE 2018, CONFORME A LAS NECESIDADES QUE DETERMINE "EL INSTITUTO", LO CUAL SE ENCUENTRA ESTABLECIDO EN EL ANEXO TÉCNICO.

QUINTA.- OBLIGACIONES.- "EL PROVEEDOR DEL BIEN" SE OBLIGA A:

"EL PROVEEDOR DEL BIEN", REALIZARÁ LA ENTREGA DEL BIEN OBJETO DE ESTE CONTRATO A TRAVÉS DE EQUIPO PROFESIONAL QUE GARANTICE LA CALIDAD DEL MISMO; "EL PROVEEDOR DEL BIEN", SE COMPROMETE A ENTREGAR EFICIENTEMENTE DICHO BIEN COMO SE ESTABLECE EN EL ANEXO TÉCNICO, QUE FIRMADO POR AMBAS PARTES FORMA PARTE DEL PRESENTE CONTRATO.

SEXTA.- RESPONSABILIDAD LABORAL.- "EL PROVEEDOR DEL BIEN" SERÁ EL ÚNICO RESPONSABLE DE LAS OBLIGACIONES DERIVADAS DE LAS DISPOSICIONES LEGALES EN MATERIA DE TRABAJO, SEGURIDAD SOCIAL Y DEMÁS ORDENAMIENTOS APLICABLES, QUE SE GENEREN CON RESPECTO DEL PERSONAL QUE FORMA PARTE DE "EL PROVEEDOR DEL BIEN" Y DEL QUE PUDIERA CONTRATAR CON OBJETO DE DAR CUMPLIMIENTO AL PRESENTE CONTRATO, POR LO QUE ÉSTE DESLINDA A "EL INSTITUTO" DE TODA RESPONSABILIDAD LABORAL, CIVIL, PENAL O DE CUALQUIER OTRA ÍNDOLE, POR LO QUE LA RELACIÓN DE SUPRA O SUBORDINACIÓN DE DICHO PERSONAL, SÓLO SURTIRÁ EFECTOS CON RESPECTO A "EL PROVEEDOR DEL BIEN", POR LO QUE EN NINGÚN CASO PODRÁ CONSIDERARSE A "EL INSTITUTO" COMO PATRÓN SOLIDARIO O SUSTITUTO.

"EL PROVEEDOR DEL BIEN" SE OBLIGA A RESPONDER POR CUALQUIER RECLAMACIÓN QUE PUDIERA EFECTUARSE DERIVADO DEL USO INDEBIDO DE PATENTES O VIOLACIONES A DERECHOS DE AUTOR, DURANTE O CON MOTIVO DEL BIEN OBJETO DE ESTE CONTRATO, LIBERANDO A "EL INSTITUTO" DE CUALQUIER RESPONSABILIDAD SOLIDARIA O SUBSIDIARIA POR ESTOS CONCEPTOS.

SÉPTIMA.- GARANTÍA DE CUMPLIMIENTO.- "EL PROVEEDOR" EN LA FECHA EN QUE SE SUSCRIBE EL PRESENTE INSTRUMENTO, SE OBLIGA A CONSTITUIR CHEQUE DE CAJA, CHEQUE CERTIFICADO Ó PÓLIZA DE FIANZA EN MONEDA NACIONAL, EXPEDIDA POR INSTITUCIÓN MEXICANA LEGALMENTE AUTORIZADA PARA TAL EFECTO, A FAVOR DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL, CON UNA VIGENCIA DESDE SU EXPEDICIÓN Y HASTA 90 DÍAS DESPUÉS DE LA ENTREGA DE LOS BIENES OBJETO DEL PRESENTE CONTRATO, COMO GARANTÍA DE LA CALIDAD DE LOS MISMOS, POR EL 15% DEL MONTO DEL CONTRATO (SIN INCLUIR EL I.V.A.), A FIN DE GARANTIZAR EL CUMPLIMIENTO DE TODAS Y CADA UNA DE LAS OBLIGACIONES CONTRAÍDAS EN EL PRESENTE INSTRUMENTO, DE CONFORMIDAD CON LO DISPUESTO POR LOS ARTÍCULOS 73 FRACCIÓN III Y 75 BIS DE LA LEY DE ADQUISICIONES PARA EL DISTRITO FEDERAL.

LA PÓLIZA DE FIANZA, A QUE SE HACE REFERENCIA DEBERÁ CONTENER LAS SIGUIENTES DELCARACIONES EXPRESAS:

- A) QUE LA FIANZA SE OTROGA EN TÉRMINOS DE ESTE INSTRUMENTO.
- B) QUE EN CASO DE QUE SEA PRORROGADO EL PLAZO ESTIPULADO PARA LA TERMINACIÓN DEL OBJETO A QUE SE REFIERE LA FIANZA O EXISTA ESPERA, SU VIGENCIA QUEDARÁ AUTOMÁTICAMENTE PRORROGADA EN CONCORDANCIA CON DICHA PRORROGA O ESPERA.
- C) QUE LA FIANZA GARANTIZA EL CUMPLIMIENTO DE TODAS LAS OBLIGACIONES CONTRACTUALES.
- D) QUE PARA SER CANCELADA LA FIANZA SERÁ REQUISITO INDISPENSABLE LA CONFORMIDAD POR ESCRITO DEL INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL.
- E) QUE LA INSTITUCIÓN AFIANZADORA ACEPTA SOMETERSE EXPRESAMENTE LO PRECEPTUADO EN LOS ARTÍCULOS 178 Y 282 DE LA LEY DE INSTITUCIONES DE SEGUROS Y DE FIANZAS EN VIGOR.

OCTAVA.- CESIÓN DE DERECHOS.- "EL PROVEEDOR DEL BIEN" SE OBLIGA A NO CEDER TRASPASAR O SUBCONTRATAR LOS DERECHOS Y OBLIGACIONES DERIVADOS DEL PRESENTE CONTRATO, Y EN CASO DE HACERLO SERÁ CONSIDERADO CAUSA DE RESCISIÓN.

NOVENA.- CONFIDENCIALIDAD.- "EL PROVEEDOR DEL BIEN" SE OBLIGA A NO PUBLICAR, DIFUNDIR, DIVULGAR, PROPORCIONAR, CEDER O COMUNICAR, POR NINGÚN MEDIO DE COMUNICACIÓN, YA SEA ELECTRÓNICO, INFORMÁTICO, ESCRITO, COLECTIVO O INDIVIDUAL, A TERCERAS PERSONAS AJENAS A LA PRESENTE RELACIÓN CONTRACTUAL, AÚN DESPUÉS DE CONCLUIDOS LOS EFECTOS DEL PRESENTE INSTRUMENTO JURÍDICO, NINGÚN TIPO DE INFORMACIÓN, DATOS ESTADÍSTICOS, RESULTADOS O PRODUCTOS, YA SEA EN FORMA PARCIAL O TOTAL, DERIVADOS DE LOS TRABAJOS QUE DESARROLLE PARA "EL INSTITUTO", MISMOS QUE SON PROPIEDAD DE ÉSTE ÚLTIMO.

EL INCUMPLIMIENTO A ESTA CLÁUSULA DARÁ ORIGEN A LA APLICACIÓN DE PENAS CONVENCIONALES, A LA RESCISIÓN DEL CONTRATO, Y POSTERIORMENTE, A HACER EFECTIVA LA GARANTÍA DE CUMPLIMIENTO, EN TÉRMINOS DE LA CLÁUSULA SÉPTIMA, SIN PERJUICIO DE LA RESPONSABILIDAD CIVIL O PENAL QUE PUDIERA DERIVARSE, LA CUAL PODRÁ SER EJERCITADA POR "EL INSTITUTO" EN CUALQUIER MOMENTO, ANTE LAS INSTANCIAS CORRESPONDIENTES.

DÉCIMA.- SUPERVISIÓN.- "EL INSTITUTO", A TRAVÉS DE LA COORDINACIÓN DE PLANEACIÓN, INFORMACIÓN Y EVALUACIÓN, COMO ÁREA SOLICITANTE DEL BIEN, MEDIANTE DEL PERSONAL QUE LABORA PARA "EL INSTITUTO" O POR TERCEROS QUE PARA TAL EFECTO DESIGNE, TENDRÁ LA FACULTAD DE VERIFICAR SI EL BIEN OBJETO DE ESTE CONTRATO SE ENTREGA POR "EL PROVEEDOR DEL BIEN", CONFORME A LOS TÉRMINOS CONVENIDOS E INSTRUCCIONES RECIBIDAS, ATENDIENDO A LO ESTABLECIDO EN EL CONTRATO, DE NO SER ASÍ, "EL INSTITUTO" PROCEDERÁ A APLICAR LAS PENAS CONVENCIONALES Y EN SU CASO, RESCINDIRÁ ADMINISTRATIVAMENTE EL CONTRATO, O EXIGIRÁ A "EL PROVEEDOR DEL BIEN" SU CUMPLIMIENTO, EN AMBOS CASOS, "EL PROVEEDOR DEL BIEN" SERÁ RESPONSABLE DE LOS DAÑOS Y PERJUICIOS QUE POR SU INCUMPLIMIENTO CAUSE A "EL INSTITUTO".

"EL INSTITUTO" O LAS PERSONAS QUE ÉSTE DESIGNE PODRÁ EN CUALQUIER MOMENTO, AÚN POSTERIOR A LA VIGENCIA DEL PRESENTE CONTRATO, SOLICITAR LA INFORMACIÓN QUE CONSIDERE PRECISA PARA LA SUPERVISIÓN DEL BIEN, POR LO QUE "EL PROVEEDOR DEL BIEN" SE OBLIGA A DAR TODO TIPO DE FACILIDADES A "EL INSTITUTO", PARA QUE REALICE LA SUPERVISIÓN DEL BIEN ADQUIRIDO Y EL CUMPLIMIENTO DE LAS OBLIGACIONES.

DÉCIMA PRIMERA.- PENA CONVENCIONAL. LAS PARTES CONVIENEN EN ESTABLECER LAS PENAS CONVENCIONALES SIGUIENTES:

CONS.	SITUACIÓN SUJETA A PENALIZACIÓN	PENA CONVENCIONAL
1	UNA VEZ CONCLUIDA LA VIGENCIA DEL CONTRATO, Y SI EXISTIERA UN ATRASO EN LA ENTREGA DEL EQUIPO ADJUDICADO.	DOS (2%) POR CIENTO DEL VALOR TOTAL DE LA PROPUESTA ECONOMICA INCLUYENDO EL IVA, POR CADA DÍA HÁBIL TRANSCURRIDO.
2	UNA VEZ CONCLUIDA LA VIGENCIA DEL CONTRATO, Y SI EXISTIERA UN ATRASO EN LA PREPARACIÓN, INSTALACIÓN, CONFIGURACIÓN Y PUESTA A PUNTO EN LA INFRAESTRUCTURA DE RED DEL INSTITUTO.	CERO PUNTO CUATRO (0.4%) POR CIENTO DEL VALOR TOTAL DE LA PROPUESTA ECONOMICA INCLUYENDO EL IVA, POR CADA DÍA HÁBIL TRANSCURRIDO.

DÉCIMA SEGUNDA.- DEFICIENCIAS.- "EL PROVEEDOR DEL BIEN" SE OBLIGA A RESPONDER POR SU CUENTA Y RIESGO DE LAS DEFICIENCIAS QUE LLEGARE A PRESENTAR EN LA ADQUISICIÓN DEL BIEN, ASÍ COMO CUALQUIER OTRA RESPONSABILIDAD EN QUE INCURRA, EN TÉRMINOS DE LO DISPUESTO POR EL ARTÍCULO 70 DE LA LEY DE ADQUISICIONES PARA EL DISTRITO FEDERAL.

DÉCIMA TERCERA.- RESCISIÓN DE CONTRATO.- LA FALTA DE OBSERVANCIA E INCUMPLIMIENTO DEL CONTENIDO DEL PRESENTE CONTRATO POR PARTE DE **"EL PROVEEDOR DEL BIEN"** FACULTA EXPRESAMENTE A **"EL INSTITUTO"** PARA DARLO POR RESCINDIDO Y APLICAR LAS PENAS A QUE POR INCUMPLIMIENTO SE HAGA ACREEDOR **"EL PROVEEDOR DEL BIEN"**.

LAS PARTES ACEPTAN QUE SI **"EL INSTITUTO"**, CONSIDERA QUE **"EL PROVEEDOR DEL BIEN"** HA INCURRIDO EN ALGUNA DE LAS CAUSAS DE RESCISIÓN QUE SE CONSIGNAN EN ESTE INSTRUMENTO JURÍDICO, PODRÁ DECRETAR LA RESCISIÓN DEL MISMO QUE OPERARÁ DE PLENO DERECHO Y SIN RESPONSABILIDAD PARA **"EL INSTITUTO"**.

"EL INSTITUTO", RESCINDIRÁ EL CONTRATO POR CUALQUIERA DE LAS CAUSAS QUE A CONTINUACIÓN SE SEÑALAN:


1. SI **"EL PROVEEDOR DEL BIEN"** NO CUMPLE CON EL BIEN ESTABLECIDO EN LA CLÁUSULA PRIMERA, EL **ANEXO TÉCNICO** Y EN LAS PROPUESTAS TÉCNICAS Y ECONÓMICAS, Y CONFORME A LAS ESPECIFICACIONES CONSIGNADAS EN ESTE CONTRATO EN CUANTO A LA CALIDAD Y CARACTERÍSTICAS REQUERIDAS DEL BIEN.
2. SI **"EL PROVEEDOR DEL BIEN"** NO CUMPLE CON LA ENTREGA DEL BIEN DENTRO DE LOS TÉRMINOS SEÑALADOS EN LA CLÁUSULA PRIMERA DEL PRESENTE CONTRATO, EL **ANEXO TÉCNICO** Y EN LAS PROPUESTAS TÉCNICAS Y ECONÓMICAS.
3. SI **"EL PROVEEDOR DEL BIEN"** ES DECLARADO EN CONCURSO MERCANTIL.
4. SI **"EL PROVEEDOR DEL BIEN"** SUBCONTRATA, CEDE O TRASPASA EN FORMA TOTAL LOS DERECHOS DERIVADOS DEL PRESENTE CONTRATO.
5. SI **"EL INSTITUTO"** DESCUBRE QUE **"EL PROVEEDOR DEL BIEN"** SE CONDUCE CON FALSEDAD, DOLO O MALA FE EN LAS DECLARACIONES HECHAS PARA LA CELEBRACIÓN, FORMALIZACIÓN Y DURANTE LA VIGENCIA DEL PRESENTE CONTRATO.
6. EN GENERAL POR CUALQUIER OTRA CAUSA IMPUTABLE A **"EL PROVEEDOR DEL BIEN"** QUE LESIONE LOS INTERESES DE **"EL INSTITUTO"**.

DÉCIMA CUARTA.- TERMINACIÓN ANTICIPADA.- AMBAS PARTES CONVIENEN QUE LA TERMINACIÓN ANTICIPADA DEL PRESENTE CONTRATO, LA SUSPENSIÓN TEMPORAL O DEFINITIVA DEL MISMO, QUE EN SU CASO SUCEDA, YA SEA DE COMÚN ACUERDO, POR ASÍ CONVENIR A LOS INTERESES DE **"EL INSTITUTO"** O POR CASO FORTUITO O DE FUERZA MAYOR, SERÁ SIN RESPONSABILIDAD ALGUNA PARA **"EL INSTITUTO"**.

DÉCIMA QUINTA.- INTERPRETACIÓN, CUMPLIMIENTO Y EJECUCIÓN.- PARA TODO LO RELACIONADO CON LA INTERPRETACIÓN, CUMPLIMIENTO Y EJECUCIÓN DE LAS OBLIGACIONES DERIVADAS DEL PRESENTE CONTRATO, AMBAS PARTES SE SOMETEN A LA JURISDICCIÓN DE LOS TRIBUNALES COMPETENTES DE LA CIUDAD DE MÉXICO, RENUNCIANDO A CUALQUIER FUERO QUE POR RAZÓN DE SUS DOMICILIOS U OTRAS CIRCUNSTANCIAS PUDIERA CORRESPONDERLES EN EL FUTURO.

LAS PARTES MANIFIESTAN QUE ENTERADAS DEL CONTENIDO, EFECTOS Y FUERZA LEGAL DEL PRESENTE CONTRATO, LO RUBRICAN Y FIRMAN EN DOS TANTOS DE CONFORMIDAD EN LA CIUDAD DE MÉXICO EL DÍA 15 DE NOVIEMBRE DE DOS MIL DIECIOCHO:

POR **"EL INSTITUTO"**

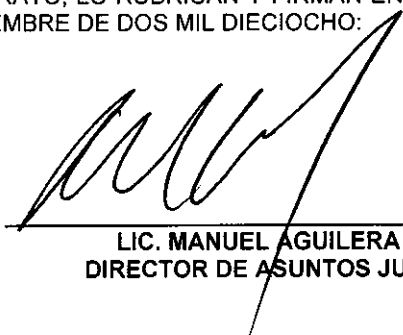
LIC. MANUEL AGUILERA VITAL
DIRECTOR DE ASUNTOS JURÍDICOS


L.A. ELÍAS DE JESÚS MARZUCA SÁNCHEZ
COORDINADOR DE PLANEACIÓN, INFORMACIÓN
Y EVALUACIÓN

POR **"EL PROVEEDOR DEL BIEN"**

ING. MIGUEL ÁNGEL FUENTES OLIVARES
REPRESENTANTE LEGAL


ANEXO TÉCNICO

CONTENIDO

1. Situación actual
2. Objetivo
3. Alcance
4. Justificación
5. Requerimientos técnicos
6. Beneficios esperados
7. Garantía y compromisos que deberá cumplir el proveedor participante
8. Documentos que deberá presentar el proveedor participante

1. SITUACIÓN ACTUAL

El Instituto de Vivienda del Distrito Federal (INVI), es organismo descentralizado de la Administración Pública de la Ciudad de México, que tiene, entre otras atribuciones, la de contribuir con el Gobierno de la Ciudad de México en la proyección, diseño y ejecución de su política de vivienda.

En ese cometido, el INVI ha de diseñar, elaborar, proponer, promover, coordinar, ejecutar y evaluar las políticas y programas de vivienda enfocados principalmente a la atención de la población de escasos recursos económicos de la Ciudad de México. Sin embargo, derivado de la operación de los programas, se produce un gran volumen de información sustantiva y administrativa, la cual es el principal insumo para documentar el ejercicio de los recursos, misma que forma parte de un proceso de intercambio de información en el interior y exterior.

A finales del año 2010, el inicio de operaciones en la sede actual, se configuró un equipo switch marca 3comm 4200G de 48 puertos, donde se conectaron 15 servidores y 7 servicios de los IDFs (por sus siglas en inglés Intermediate Distribution Frame) que dan servicio a la red en el edificio principal, los requerimientos de acceso eran suficientes para las aplicaciones que se ejecutaban. En el 2011 fue necesario complementar la tarea de administrar y distribuir la carga de procesamiento de paquetes de red con un equipo de iguales características switch marca 3comm 4200G, además de un router cisco 2900 para el trabajo de las 12 VLANs, situación que mejoró el acceso y distribución de los paquetes de red para los servicios de voz, datos y video.

Para finales de 2016, la infraestructura de red está compuesta por 25 servidores 7 servicios de los IDFs, y aunque los servidores representan el 66% de incremento, el desarrollo de más de 80 subsistemas que operan dentro del Centro de Servicios de Información – SINTEV generó un incremento significativo en los recursos de información disponible y accesible a los empleados del instituto.

Uno de los sistemas que más demanda el uso de recursos de la red y las bases de datos asociadas a él, es el sistema integral de gestión de la correspondencia (SISCO) quien cuenta con más de 400 usuarios en las oficinas centrales, mismos que en algunas ocasiones, se encuentran imposibilitados de obtener la información que necesitan por encontrar saturación en los requerimientos de acceso a la red.

Los procesos de digitalización de expedientes, contratos, convenios, escrituras entre otros, llevados a cabo por el instituto en los ejercicios anteriores, han abierto la posibilidad de consultar información a un clic de distancia a las unidades administrativas, reduciendo el tiempo de respuesta interno y a los solicitantes, esto a su vez ha requerido realizar inversiones en los servidores de almacenamiento y administración de documentos digitales, sin embargo, el acceso a éstos documentos ha provocado el incremento en el tránsito de datos en la red.

2. OBJETIVO

Adquirir el Switch Core de 48 puertos para el Instituto de Vivienda del Distrito Federal para gestionar de forma eficiente la red de voz, datos y video instalada en el edificio principal, con los mecanismos adecuados de seguridad y accesibilidad a los recursos de información que se generan como parte del desempeño de las actividades administrativas y sustantivas en el ejercicio de los programas de vivienda.

3. ALCANCE

Contar con un equipo Swith Core de 48 puertos 10/100/1000, con fuente redundante, con capacidad de conmutación (Switching Capacity) de 472 Gbps, y Forwarding Rate de 130.95 Mpps, para soportar el tráfico en la red de voz y datos acorde con la "Infraestructura de Operación", seguridad, comunicaciones y plataforma del Centro de Servicios de Información – SINTEV. Adicionalmente, el Switch Core deberá satisfacer las siguientes necesidades:

1. Ofrecer alta disponibilidad de las operaciones en la infraestructura de voz y datos, con el apoyo de dos fuentes de alimentación instaladas en el Swith Core.
2. Conectividad LAN, WLAN.
3. Acceso a las aplicaciones internas y externas.
4. Optimización del rendimiento de las aplicaciones y recursos compartidos que dependen de la red de voz, datos y video.
5. Capacidad para soportar la convergencia de VLANs.
6. Mantener los esquemas de redundancia y conectividad hacia pisos del edificio principal.

4. JUSTIFICACIÓN

El creciente volumen de información, acceso a sistemas de información, recursos compartidos, documentos digitalizados, trae consigo una ventaja significativa en el desarrollo de las actividades sustantivas, y esto a su vez, es directamente proporcional al incremento en el tránsito de datos a través de la red, lo que demanda sistemas de administración eficiente y con mecanismos que garanticen la accesibilidad de manera ágil, evitando tiempos de espera y pérdidas de conexión por agotarse el tiempo de espera de una transacción.

A la fecha no había sido necesario reemplazar los actuales equipos, sin embargo, su nivel de obsolescencia es muy alto, pues fueron adquiridos hace casi 10 años y han operado de manera ininterrumpida durante los últimos 7 años con sus debidos mantenimientos. Otro factor importante son las crecientes cargas de procesamiento de datos en la red interna tipo LAN y Wireless en paquetes de voz, datos y video, que hace necesaria la adquisición de un equipo lo suficientemente robusto que garantice la continuidad de los servicios y agregue valor en temas de seguridad interna y de protección perimetral contra amenazas informáticas como las intrusiones y la propagación de virus.

Este equipo también nos permitirá administrar los actuales servicios de internet a los cuales acceden alrededor de 450 empleados (un 75% del personal en el edificio) en un canal dedicado de 20mb, permitiendo switchear a una velocidad mayor, las peticiones de internet y bloquear en cierta medida el contenido malicioso, haciendo más eficiente y ágil su acceso, para estar en posibilidad de brindar acceso al 100% de los empleados.

5. REQUERIMIENTOS TÉCNICOS

Especificación		Descripción
1	Puertos	48 puertos Ethernet 10/100/1000
2	Modulo	1 modulo para puertos Uplink.
3	Tarjeta o módulo de Red	1 de 4 interfaces SFP para 10 Gigabits Ethernet
4	Switching capacity	472 Gbps en los 48 puertos Multigigabit Ethernet
5	Administración	Vía CLI por hyperterminal, y web
6	Protocolos de Ruteo	IPv4 e IPv6, RIPv1, RIPv2, RIPv3, OSPF, BGPv4, OSPFv3, IS-ISv4, PBR, VRF, PIM
7	Total switched virtual interfaces (SVIs)	1,000
8	Forwarding Rate	130.95 Mpps
9	Estándares	IEEE 802.1as IEEE 802.1s IEEE 802.1w IEEE 802.11 IEEE 802.1x IEEE 802.1x-Rev IEEE 802.3ad IEEE 802.3at IEEE 802.3bz IEEE 802.3x full duplex on 10BASE-T, 100BASE-TX, and 1000BASE-T ports IEEE 802.1D Spanning Tree Protocol IEEE 802.1p CoS prioritization IEEE 802.1Qat Stream Reservation Protocol IEEE 802.1Qav IEEE 802.1Q VLAN IEEE 802.3 10BASE-T specification IEEE 802.3u 100BASE-TX specification IEEE 802.3ab 1000BASE-T specification IEEE 802.3z 1000BASE-X specification
10	Servicios	4 GB DRAM 4,000 VLAN IDs 32,000 Direcciones MAC 1,000 Switch Virtual Interfaces (SVIs)
11	Seguridad	Dynamic ARP inspection (DAI) User authentication The Unicast Reverse Path Forwarding (uRPF) ACL (Access Control Lists) Secure Shell (SSH) Protocol, Kerberos, and Simple Network Management Protocol Version 3 (SNMPv3) TACACS+ and RADIUS authentication Bridge protocol data unit (BPDU) Spanning Tree Root Guard (STRG) Wireless and-to-end security offers CAPWAP-compliant DTLS encryption.
12	Garantía	Garantía limitada del hardware Lifetime, con 3 años en todas sus partes con tiempo de respuesta de 8X5 al siguiente día hábil, remplazo sin costo alguno y 36 meses de soporte en TAC 8x5.
13	Contenido de la caja	Switch, cable para corriente, software del equipo y manuales

Especificación		Descripción
14	Unidades de Rack	Con todo lo necesario para su instalación en rack
15	Dimensiones (Alto x Ancho x Profundidad)	4.45 cm. x 44.5 cm. x 45.0 cm.
16	Peso aproximado (Kg.)	7.7
17	Tiempo Medio de Vida entre Fallos (MTBF - Mean Time Between Failures) mínima	300,000 horas
18	Fuente de alimentación	Redundante de 350WAC
19	Temperatura de operación	-5 a 45°C
20	Indicadores LED	"AC OK": Input power to the power supply is OK "PS OK": Output power from the power supply is OK
21	Fuente de alimentación	2 fuentes de poder 115-240VAC, 50-60 Hz, 350W AC
22	Conectividad	1 Cable Tipo 1 50CM Stacking Cable 1 Cable Stack Power Cable 30 cm. 1 Network Module Blank
23	Cumplimiento de Normas.	UL 60950-1, CAN/CSA-C22.2 No. 60950-1, EN 60950-1, IEC 60950-1, CCC, CE Marking
24	Instalación	El proveedor, deberá trabajar en conjunto con la Jefatura de Unidad Departamental de Informática en la preparación, instalación, configuración y puesta a punto en la infraestructura de red del instituto, a fin de garantizar un adecuado funcionamiento del equipo.

6. BENEFICIOS ESPERADOS

- Ofrecer servicios de redundancia y alta disponibilidad para la conectividad de los 5 pisos del edificio principal con un 1Gb de velocidad.
- Implementar la segmentación de la red actual bajo el cumplimiento de mejores prácticas de switching y de seguridad informática.
- Mejora de la productividad, derivado de un mejor acceso y disponibilidad desde cualquier servidor, laptop, computadora, tableta o teléfono inteligente conectado a la red de voz, datos y video del instituto, así como, reducción en el tiempo para archivar, consultar y compartir archivos electrónicos.
- Mejorar el tiempo de respuesta en el acceso a las aplicaciones del Centro de Servicios de Información.
- Interconectar la granja de servidores a una mayor velocidad en un solo equipo de switch de gran capacidad de conmutación que permita resolver los procesos distribuidos del Centro de Servicios de Información, de una manera más ágil, reduciendo el tiempo de respuesta a los usuarios y sus aplicaciones.
- Hacer converger las unidades de almacenamiento y respaldo de información en un ecosistema redundante para garantizar su integridad, seguridad y accesibilidad a todos los usuarios con privilegios organizados de acuerdo a sus funciones.

- Administrar a través de listas de acceso, la comunicación hacia los servicios de internet de una forma segura, maximizando el actual ancho de banda de los enlaces dedicados contratados por el instituto.
- Permitir el acceso a los recursos de red del Instituto de una manera segura a todos los dispositivos que así lo requieran derivados de las funciones presentes y futuras.
- Extender los servicios de voz a las mesas de trámite del Programa de Mejoramiento de Vivienda mediante la interconectividad de los sitios remotos a través de internet.

7. GARANTÍA Y COMPROMISOS QUE DEBERÁ CUMPLIR EL PROVEEDOR PARTICIPANTE

- El Proveedor deberá otorgar una garantía de 3 años en todas sus partes, con remplazo de partes de 8X5 al siguiente día hábil, sin costo alguno para el Instituto.
- El proveedor se comprometerá a dar cumplimiento a la garantía establecida.
- Los reportes de servicio se atenderán en las instalaciones del instituto.
- El tiempo de atención será, como máximo de dos horas en días hábiles.
- El tiempo de reparación será de 24 horas máximo. Si excede de este lapso, el proveedor deberá entregar un equipo de respaldo equivalente mientras se soluciona el problema.
- Si la reparación excede de 30 días naturales, el proveedor entregará a cambio un equipo nuevo de las mismas especificaciones técnicas que el dañado.

8. DOCUMENTOS QUE DEBERÁ PRESENTAR EL PROVEEDOR PARTICIPANTE

- Carta del Fabricante den donde se manifieste que el licitante es un canal Certificado.
- Carta del Fabricante en donde se establezca que el canal o partner, se encuentra habilitado para la integración, instalación, y configuración de productos y para la presentación de soporte técnico de productos en México.
- Carta del fabricante en la que manifieste la disponibilidad de repuestos de los productos de hardware y software de al menos 5 años.
- Carta del fabricante en la que se relacionen sus centros de servicio autorizados.
- Carta en la que se manifieste bajo protesta de decir verdad que cuentan con la infraestructura técnica, de servicio y refacciones para el mantenimiento de los equipos objeto del proceso de adjudicación, por cuando menos 5 años posteriores a la fecha de su recepción formal por el área requirente.
- Los equipos suministrados, deberán contar con la ficha técnica, los manuales, instructivos, catálogos, y/o folletos en idioma español que sean necesarios para el conocimiento y óptimo uso, aprovechamiento, operación y funcionamiento de los mismos.
- Para el proceso de adjudicación, se podrán presentar folletos y/o información bajada de Internet donde aparezcan las especificaciones ofertadas proporcionando la URL para verificación. En caso de que alguna especificación no aparezca en la documentación impresa y electrónica se deberá anexar carta del fabricante, firmada bajo protesta de decir verdad, donde incluya la o las especificaciones técnicas faltantes.
- Solicitar el Certificado ISO 9001-2008
- Solicitar el Certificado de acreditación de ISO/IEC 17025:2005
- Solicitar el certificado ISO 14001:2004

9. VIGENCIA DE LA ADQUISICIÓN DEL BIEN

A partir del siguiente día hábil del contrato y hasta el 31 de diciembre de 2018

10. FORMA DE PAGO

Se pagará un 80% del monto total presentado en su oferta económica, una vez que el equipo sea validado y obtenga el visto bueno del personal de Informática y sea ingresado en el almacén central del Instituto.

Se pagará un 20% una vez que el equipo se haya preparado, instalado, configurado y puesta a punto en la infraestructura de red del Instituto en Coordinación con el personal de la JUD de Informática, de acuerdo a lo establecido en la especificación número 24 de los requerimientos técnicos, del Anexo Técnico Uno.

11. PENAS CONVENCIONALES

Cons.	Situación sujeta a penalización	Pena convencional
1	Una vez concluida la vigencia del contrato, y si existiera un atraso en la entrega del equipo adjudicado.	Dos (2%) por ciento del valor total de la propuesta económica incluyendo el IVA, por cada día hábil transcurrido.
2	Una vez concluida la vigencia del contrato, y si existiera un atraso en la preparación, instalación, configuración y puesta a punto en la infraestructura de red del instituto.	Cero punto cuatro (0.4%) por ciento del valor total de la propuesta económica incluyendo el IVA, por cada día hábil transcurrido.





Calle Bordo No. 34-A Col. Santa Úrsula Cupe
Cajalutero, San Luis Potosí, México
Tels. 56734097, 24579409, 24579410 y 24579412
Fax: 24579411
www.iitesa.com
RFC: 87050323DWA

Cotización del Suministro de un Equipo Switch de la marca Cisco, para el Core de la Red de Datos, de 48 puertos para el Centro de Datos del Instituto de Vivienda de la Ciudad de México.

PARA: LIC. JOSE ANTONIO MENDOZA ACUÑA. DIRECTOR DE ADMINISTRACIÓN.
INSTITUTO DE VIVIENDA DEL DISTRITO FEDERAL
Ph no: +52 5141 0300

DE: ING. MIGUEL ANGEL FUENTES OLIVARES
INTEGRADORA EN INFRAESTRUCTURA TECNOLÓGICA IITESA SA DE CV
Ph no: +52 24579409

Date: 12-noviembre-2018

Nº DE COTIZACIÓN: IIT-INV112

Line Number	Part Number	Description	Service Duration (Months)	Unit	Unit List Price (M.N.)	Qty	Unit Net Price (M.N.)	Disc(%)	Extended Net Price (M.N.)
1.0	WS-C3850-48T	Suministro de equipo Cisco Catalyst WSC3850, of 48 Port GE, IP Services, El equipo incluye los siguientes componentes y servicios. CAT3850 Universal K9 Image 350W AC Config 1 Secondary Power Supply Cisco Catalyst 3850 4 x 10GE Network Module North America AC Type A Power Cable Console Cable 6 ft with USB Type A and mini-B 50CM Type 1 Stacking Cable Catalyst 3750X and 3850 Stack Power Cable 30 CM 90 Day Full Functionality Trial of LiveAction software 350W AC Config 1 Power Supply Cisco Energy Management for DO 1 Yr subs 100 end device Cisco Energy Management for DO 1 Yr subs 100 end device Servicio de Smartnet SNTC-8X5XNBD Cisco Catalyst 3850 48 Port Full PoE IP, por 3 años. Servicios Profesionales para la instalación, configuración y puesta a punto del equipo. ** El equipo Cumple con todas las Especificaciones Técnicas descritas en los Terminos de Referencia que nos fueron proporcionados.	36 meses	Pieza	\$789,644.83	1	\$789,644.83	\$0.00	\$789,644.83

Subtotal (M.N.)	\$789,644.83
IVA (M.N.)	\$126,343.17
Total Price (M.N.)	\$915,988.00

Importe total con Ietra incluyendo el IVA: Novecientos quince mil novecientos ochenta y ocho pesos 00/100 Moneda nacional

CONDICIONES COMERCIALES

- Forma de Pago: Conforme a las establecidas por el INVI.
- Vigencia de la cotización 20 días naturales
- Garantía del equipo; 3 años
- Tiempo de entrega de 4 a 5 semanas
- Los precios están expresados en Moneda Nacional

Atentamente,
Ing. Miguel A. Fuentes Olivares
Director Comercial y Representante Legal.
Email: mfuentes@iitesa.com
Tels. 01 55 24579409, 24579410 y 24579411
Movil. 55 37910212



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2005

CISCO SYSTEMS, INC.
 170 West Tasman Drive
 San Jose, CA 95134-1706
 Mr. Gerard Thorpe Phone: 408 527 7097

ELECTRICAL

Valid to: November 30, 2016

Certificate Number: 1178.01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following product safety, telecommunications, environmental simulation, radio, and electromagnetic compatibility (EMC/EMI) tests:

Test Technology:**Product Safety****Facility:****Building P:****Test Method(s)¹:**

IEC 60950-1:2001 (excluding: Cl. 2.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 4.3.1, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.5.2, Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.7, Cl. 7.3.2, Annex A, Annex B [except B.7], Annex H, Annex K, Annex R, Annex U);

IEC 60950-1:2005 (excluding: Cl. 2.8, Cl. 2.10.5.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 2.10.10, Cl. 2.10.11, Cl. 2.10.12, Cl. 4.3.1, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.5.5, Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.8, Cl. 7.4.2, Annex A, Annex B [except B.7], Annex H, Annex K, Annex Q, Annex R, Annex U);

AS/NZS 60950.1:2011 (excluding: Cl. 2.8, Cl. 2.10.5.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 2.10.10, Cl. 2.10.11, Cl. 2.10.12, Cl. 4.3.1, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.5.5, Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.8, Cl. 7.4.2, Annex A, Annex B [except B.7], Annex H, Annex K, Annex Q, Annex R, Annex U);

GR-3108, Issue 3 (2013)

(R5-11, R5-15, R5-16, and R5-17 only);

GR-1089, Issue 6 (2011) (excluding sections 2, 3, 4.3, 4.6.1.3, 4.6.2, 4.6.3, 4.7, 5, 6, and 9.11-9.13);

IEEE 1613;

IEC 61850-3 (excluding sections 4, 6.2, and 6.5);

RRL Notice No. 2011-14, Annex 4, Test method for Electrical Safety of Information Technology Equipment (IEC 60950-2001); QCVN 22:2010/BTTTT;

IEC 60945: 2002 (sections 4.3.2, 5.2.3, 7.2, and 12.1)

Test Technology:
Product Safety
(Cont'd)


Facility:
Building I:

Test Method(s)¹:

IEC 60950-1:2001 (excluding: Cl. 2.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 4.3.1, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.5.2, Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.7, Cl. 7.3.2, Annex A, Annex B [except B.7], Annex H, Annex K, Annex R, Annex U);
 IEC 60950-1:2005 (excluding: Cl. 2.8, Cl. 2.10.5.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 2.10.10, Cl. 2.10.11, Cl. 2.10.12, Cl. 4.2.11, Cl. 4.3.1, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.5.5, Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.8, Cl. 7.4.2, Annex A, Annex B [except B.7], Annex H, Annex K, Annex Q, Annex R, Annex U);
 AS/NZS 60950.1:2011 (excluding: Cl. 2.8, Cl. 2.10.5.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 2.10.10, Cl. 2.10.11, Cl. 2.10.12, Cl. 4.2.11, Cl. 4.3.1, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.5.5, Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.8, Cl. 7.4.2, Annex A, Annex B [except B.7], Annex H, Annex K, Annex Q, Annex R, Annex U);
 RRL Notice No. 2011-14, Annex 4, Test method for Electrical Safety of Information Technology Equipment (IEC 60950-2001);
 QCVN 22:2010/BTTTT

Building 22:

IEC 60950-1:2001 (excluding: Cl. 2.8, Cl. 2.9.2, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 4.3.1, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.7, Annex A, Annex B [except B.7], Annex H, Annex K, Annex R, Annex U);
 IEC 60950-1:2005 (excluding: Cl. 2.8, Cl. 2.9.2, Cl. 2.10.5.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 2.10.10, Cl. 2.10.11, Cl. 2.10.12, Cl. 4.2.11, Cl. 4.3.2, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.6, Cl. 5.3.8, Annex A, Annex B [except B.7], Annex H, Annex K, Annex Q, Annex R, Annex U);
 AS/NZS 60950.1:2011 (excluding: Cl. 2.8, Cl. 2.9.2, Cl. 2.10.5.8, Cl. 2.10.6, Cl. 2.10.7, Cl. 2.10.8, Cl. 2.10.9, Cl. 2.10.10, Cl. 2.10.11, Cl. 2.10.12, Cl. 4.2.11, Cl. 4.3.2, Cl. 4.3.6, Cl. 4.3.10, Cl. 4.3.12, Cl. 4.3.13.4, Cl. 4.3.13.5 (Class 2 and higher), Cl. 4.6.5, Cl. 4.7.3.6, Cl. 5.3.6, Cl. 5.3.8, Annex A, Annex B [except B.7], Annex H, Annex K, Annex Q, Annex R, Annex U);
 RRL Notice No. 2011-14, Annex 4, Test method for Electrical Safety of Information Technology Equipment (IEC 60950-2001);
 QCVN 22:2010/BTTTT



The below tests are performed using the above Product Safety standards

- Input Current	- Steady Force Test
- Durability of Markings	- Drop Test
- Access to Live parts	- Stress Relief
- Energy Hazards	- Wall or Ceiling Mounted Equipment
- Capacitance Discharge	- Handles and Manual Controls
- SELV Circuits	- Battery Overcharge/discharge and Reverse Current Measurements
- TNV Circuits, Limits, Connections Voltages Generated Externally	- Power Supply Output/transformer/accessible Connector Overload
- Telecommunication Network Separation and Protection	- Protection Against Hazardous Moving Parts
- Limited Current Circuits, Values	- Thermal Requirements
- Limited Power Sources	- Temperature Rise
- Resistances of Earthing Conductors	- Resistance to Abnormal Heat
- Humidity Conditioning (bldg. P & bldg. 22)	- Touch Current and Protective Conductor Current
- Creepage Distances, Clearances	- Electric Strength
- Working Voltage	- Component Failure and Abnormal Operation
- Mechanical Strength	- Voltage Surge/impulse
- Ball Pressure (bldg 22)	- Stability
- Adhesive Aging (bldg. P)	- Voltage Surge (10KV) (Bldg. 22)

Test Technology:
Telecommunications

Facility:
Building P:

Test Method(s)¹:

Acoustic:

AS/ACIF S004; AS/ACIF S040;
CS-03 Part V, Issue 9, Amendment 1, January 2009;
FCC 47 CFR Part 68 (68.316 and 68.317);
PTC 220 (Section 8 only)

Analog:

AS/ CA (S002, S003);
DGT PSTN 01;
DPT-TE-001;
ETSI ES 203 021;
FCC 47 CFR Part 68 (68.318);
HKTA (2011, 2013, 2023);
IC CS-03, Part I, Issue 9, Amendment 4, January 2010;
IDA TS PSTN;
JATE Blue Book;
PTC 200/220;
SKMM MTSFB TC T001;
TBR (15, 17, 21);
TIA-968-B;
Technical Requirements for Telecommunications – Terminal
Equipment (RRA Public Notification 2014-114,
Aug 29, 2014);
QCVN 19:2010/BTTT

Peter Nguyen

Test Technology:
Telecommunications
(Cont'd)

Facility:
Building P:
(cont'd)

Test Method(s)¹:
Integrated Service Digital Network (ISDN):
 AS/ACIF (S031, S038);
 ACA TS -014;
 DGT IS 6100;
 HKTA (2014, 2015, 2027);
 IC: CS-03, Part VI, Issue 9, Amendment 1, September 2012;
 IDA TS ISDN;
 ITU (I.430, I.431, Q.921, Q.931);
 JATE Green Book;
 SKMM FTS ISDN-PA; SKMM FTS ISDN-BA;
 TBR (3, 4, 33, 34 – *excluding section 8 of all parts*);
 TIA-968-B;
 Technical Requirements for Telecommunications – Terminal
 Equipment (RRA Public Notification 2014-114,
 Aug 29, 2014)

Leased Line:
 AS/ACIF S016;
 DGT: ID 0002;
 HKTA 2017;
 IC: CS-03, Part II, Issue 9, Amendment 1, September 2012;
 IDA TS DLCN;
 ITU G.703 (*excluding Sections 4, 6, 7, 10, 12, 14, and 16*);
 JATE Green Book;
 TIA-968-B;
 TBR (12 [*excluding Section 5.4*],
 13 [*excluding Section 4.4*], 14, and 24);
 Technical Requirements for Telecommunications – Terminal
 Equipment (RRA Public Notification 2014-114,
 Aug 29, 2014);
 QCVN 21:2010/BTTTT

Optical:
 GR-253 (Section 4);
 ITU: G.957;
 JATE Green Book;
 Korean Telecom OC-3 (155,520 kbps)

Digital Subscriber Loop (DSL):
 ADSL01 (Sections 6.2 and 8 only);
 AS/ACIF S041.1; AS/ACIF S041.2;
 IC: CS-03, Part VIII, Issue 9, Amendment 4, May 2009;
 IDA TS ADSL;
 ITU-T G.992.1, 992.3, 992.5 Annex A (ASDL0POTS);
 SKMM FTS ADSL;
 TIA-968 B; VDSL01 (Section 7);
 Technical Requirements for Telecommunications – Terminal
 Equipment (RRA Public Notification 2014-114,
 Aug 29, 2014)

Serial Interfaces:
 ITU (V.10, V.11, V.28, V.36, X.21);
 TBR (1, 2)

Peter Mlyns

Test Technology:
Telecommunications
(Cont'd)

Facility:
Building I:

Test Method(s)¹:

Acoustic:

AS/ACIF S004; AS/ACIF S040;
CS-03 Part V, Issue 9, Amendment 1, January 2009;
FCC 47 CFR Part 68 (68.316 and 68.317);
PTC 220 (Section 8 only);
Technical Requirements for Telecommunications – Terminal
Equipment (RRA Public Notification 2014-114,
Aug 29, 2014)

Environmental Testing

Building P:

GR-63, Issue 4 (excluding Sections 5.2 and 5.5);
GR-3108, Issue 3 (2013)
(excluding sections 4.2.3, 6.2, 6.4, 6.5, and 7);
IEC 61850-3 (excluding Sections 4, 5.4, 5.6);
IEEE 1613;
IEC 60945:2002 (sections 4.3.1, 7.1, 8.2, 8.3, 8.4, 8.7, 11.1)

EMC / EMI

Building P:

CISPR 22:2008;
CNS 13438 (up to 6 GHz);
EN 301 489-1 (excluding Section 9.6);
EN 301 489-4;
EN 301 489-7;
EN 301 489-17;
EN 301 489-24;
EN 55022:2010;
EN 50083-2;
EN 61000-3-2;
EN 61000-3-3;
EN 61000-3-11;
EN 6100-3-12;
FCC CFR 47, Part 15, Subpart B, using ANSI C63.4-2003
and ANSI C63.4-2009;
GR-3108, Issue 3 (2013);
GR-1089, Issue 6 (2011), Sections 2, 3, and 10
(excluding Sections 4.6.1.3.2, 4.6.2.1.2, 4.7, and 10.7);
IEC 61000-4-2;
IEC 61000-4-3;
IEC 61000-4-4;
IEC 61000-4-5;
IEC 61000-4-6;
IEC 61000-4-8;
IEC 61000-4-11;
IEC 61850-3 (excluding Section 4);
IEEE 1613;
KN 22; KN 24;
KN 301-489-01 (excluding Section 9.6);
KN 301-489-07;
KN 301-489-17;
KN 301-489-24;
VCCI V-3/2013.04 (up to 6 GHz);
Technical Requirements for Electromagnetic Interference
(RRA Public Notification 2014-8, June 23, 2014);

Test Technology:
EMC / EMI
(Cont'd)

Facility:
Building P:
(cont'd)

Test Method(s)¹:
 Test Methods for Electromagnetic Interference
 (RRA Announce 2014-37, June 23, 2014);
 Annex 1-11 (KN 61000-3-2, KN 61000-3-12);
 Annex 1-12 (KN 61000-3-3, KN 61000-3-13);
 Annex 5 (KN 22); Annex 8-1 (KN 301-489-01);
 Annex 8-2 (KN 301-489-07); Annex 8-3 (KN 301-489-17);
 Annex 8-4 (KN 301-489-24);
 Technical Requirements for Electromagnetic Susceptibility
 (RRA Public Notification 2014-9, June 23, 2014);
 Test Methods for Electromagnetic Susceptibility
 (RRA Announce 2014-38, June 23, 2014) –
 Annex 1-1 – 1-7 (KN-61000-4-2, -3, -4, -5, -6, -8, -11)
 Annex 5 (KN 24);
 Annex 8-1 (KN 301 489-01); Annex 8-2 (KN 301 489-07);
 Annex 8-3 (KN 301 489-17); Annex 8-4 (KN 301 489-24);
 QCVN 18:2010/BTTTT
 (EN 300 339:1998);
 TCVN 7317:2003 (CISPR 24:1997);
 TVCN 7189:2009 (CISPR 22:2006);
 IEC 60945:2002 (Sections 4.3.3, 4.5.1, 7.3, 7.4, 9, and 10);
 IEC 60533:1999 (excluding special power distribution zone)

Building 16: CISPR 22:2008;
 CNS 13438 (conducted emissions only);
 EN 301 489-1 (excluding section 9.6);
 EN 301 489-4;
 EN 301 489-7;
 EN 301 489-17;
 EN 301 489-24;
 EN 55022:2010;
 EN 50083-2;
 EN 61000-3-2;
 EN 61000-3-3;
 EN 61000-3-11;
 EN 61000-3-12;
 IEC 61000-4-2;
 IEC 61000-4-3;
 IEC 61000-4-4;
 IEC 61000-4-5;
 IEC 61000-4-6;
 IEC 61000-4-8 (no short duration mode);
 IEC 61000-4-11;
 FCC CFR 47, Part 15, Subpart B, using ANSI C63.4-2003
 and ANSI C63.4-2009; KN 24;
 KN 301-489-01
 (conducted emissions only – excluding Section 9.6);
 KN 301-489-07 (conducted emissions only);
 KN 301-489-17 (conducted emissions only);
 KN 301-489-24 (conducted emissions only);
 VCCI V-3/2013.04 (up to 6 GHz);
 Technical Requirements for Electromagnetic Interference
 (RRA Public Notification 2014-8, June 23, 2014);

Test Technology:
EMC/EMI
(Cont'd)

Facility:
Building 16:
(cont'd)

Test Method(s):
 Test Methods for Electromagnetic Interference (RRA Announce 2014-37, June 23, 2014) –
 Annex 1-11 (KN 61000-3-2, KN 61000-3-12);
 Annex 1-12 (KN 61000-3-3, KN 61000-3-11);
 Annex 5 (KN 22); Annex 8-1 (KN 301-489-01);
 Annex 8-2 (KN 301-489-07); Annex 8-3 (KN 301-489-17);
 Annex 8-4 (KN 301-489-24);
 Technical Requirements for Electromagnetic Susceptibility (RRA Public Notification 2014-9, June 23, 2014);
 Test Methods for Electromagnetic Susceptibility (RRA Announce 2014-38, June 23, 2014) –
 Annex 1-1 – 1-7 (KN-61000-4-2, -3, -4, -5, -6, -8 (no short duration mode), -11);
 Annex 5 (KN 24);
 Annex 8-1 (KN 301 489-01); Annex 8-2 (KN 301 489-07);
 Annex 8-3 (KN 301 489-17); Annex 8-4 (KN 301 489-24);
 QCVN 18:2010/BTTTT (EN 300 339:1998);
 TCVN 7137:2003 (CISPR 24:1997);
 TVCN 7189:2009 (CISPR 2:2006)

Building I: CISPR 22:2008;
 CNS 13438 (up to 6GHz);
 EN 301 489-1 (excluding Section 9.6);
 EN 301 489-4;
 EN 301 489-7;
 EN 301 489-17;
 EN 301 489-24;
 EN 55022:2010;
 EN 50083-2;
 EN 61000-3-2;
 EN 61000-3-3;
 EN 61000-3-11;
 EN 61000-3-12;
 FCC 47 CFR, Part 15, Subpart B, using ANSI C63.4-2003 and ANSI C63.4-2009;
 IEC 61000-4-2;
 IEC 61000-4-3;
 IEC 61000-4-4;
 IEC 61000-4-5;
 IEC 61000-4-6;
 IEC 61000-4-8 (no short duration mode);
 IEC 61000-4-11;
 KN 61000-4-11;
 VCCI V-3/2013.04 (up to 6 GHz);
 KN 24;
 KN 301-489-01
 (conducted emissions only – excluding Section 9.6);
 KN 301-489-07 (conducted emissions only);
 KN 301-489-17 (conducted emissions only);
 KN 301-489-24 (conducted emissions only);
 Technical Requirements for Electromagnetic Interference (RRA Public Notification 2014-8, June 23, 2014);





Test Technology:
EMC/EMI
(Cont'd)

Facility:
Building I
(cont'd):

Test Method(s)¹:
 Test Methods for Electromagnetic Interference
 (RRA Announce 2014-37, June 23, 2014) –
 Annex 1-11 (KN 61000-3-2, KN 61000-3-12);
 Annex 1-12 (KN 61000-3-3, KN 61000-3-11);
 Annex 5 (KN 22 – conducted emissions only);
 Annex 8-1 (KN 301-489-01 – conducted emissions only,
excluding Section 9.6);
 Annex 8-2 (KN 301-489-07 – conducted emissions only);
 Annex 8-3 (KN 301-489-17 – conducted emissions only);
 Annex 8-4 (KN 301-489-24 – conducted emissions only);
 Technical Requirements for Electromagnetic Susceptibility
 (RRA Public Notification 2014-9, June 23, 2014);
 Test Methods for Electromagnetic Susceptibility
 (RRA Announce 2014-38, June 23, 2014) –
 Annex 1-1 – 1-7 (KN-61000-4-2, -3, -4, -5, -6, -8
 (no short duration mode), -11); Annex 5 (KN 24);
 Annex 8-1 (KN 301 489-01); Annex 8-2 (KN 301 489-07);
 Annex 8-3 (KN 301 489-17); Annex 8-4 (KN 301 489-24);
 QCVN 18:2010/BTTTT (EN 300 339:1998);
 TCVN 7317:2003 (CISPR 24:1997);
 TVCN 7189:2009 (CISPR 22:2006)

Building 7: CISPR 22:2008;
 CNS 13438 (conducted emissions only);
 EN 301 489-1 (*excluding Section 9.6*);
 EN 301 489-4;
 EN 301 489-7;
 EN 301 489-17;
 EN 301 489-24;
 EN 55022:2010;
 EN 50083-2;
 EN 61000-3-2;
 EN 61000-3-3;
 EN 61000-3-11;
 EN 61000-3-12;
 FCC 47 CFR, Part 15, Subpart B, using ANSI C63.4-2003
 and ANSI C63.4-2009;
 IEC 61000-4-2;
 IEC 61000-4-3;
 IEC 61000-4-4;
 IEC 61000-4-5;
 IEC 61000-4-6;
 IEC 61000-4-8 (no short duration mode);
 IEC 61000-4-11;
 VCCI V-3/2013.04 (*up to 6 GHz*);
 KN 24;
 KN 301-489-01 (conducted emissions only –
excluding Section 9.6);
 KN 301-489-07 (conducted emissions only);
 KN 301-489-17 (conducted emissions only);
 KN 301-489-24; (conducted emissions only);
 Technical Requirements for Electromagnetic Interference
 (RRA Public Notification 2014-8, Jun 23, 2014);

Peter Nguyen

Test Technology:
EMC/EMI
(Cont'd)

Facility:
Building 7:
(cont'd)

Test Method(s)¹:

Test Methods for Electromagnetic Interference
 (RRA Announce 2014-37, June 23, 2014) –
 Annex 1-11 (KN 61000-3-2, Annex 61000-3-12);
 Annex 1-12 (KN 61000-3-3, KN 61000-3-11);
 Annex 5 (KN 22 – conducted emissions only);
 Annex 8-1 (KN 301-489-01 – conducted emissions only,
excluding Section 9.6);
 Annex 8-2 (KN 301-489-07 – conducted emissions only);
 Annex 8-3 (KN 301-489-17 – conducted emissions only);
 Annex 8-4 (KN 301-489-24 – conducted emissions only);
 Technical Requirements for Electromagnetic Susceptibility
 (RRA Public Notification 2014-9, June 23, 2014);
 Test Methods for Electromagnetic Susceptibility
 (RRA Announce 2014-38, June 23, 2014) –
 Annex 1-1 – 1-7 (KN-61000-4-2, -3, -4, -5, -6, -8
 (no short duration mode), -11);
 Annex 5 (KN 24);
 Annex 8-1 (KN 301 489-01); Annex 8-2 (KN 301 489-07);
 Annex 8-3 (KN 301 489-17); Annex 8-4 (KN 301 489-24);
 QCVN 18:2010/BTTTT (EN 300 399:1998);
 TCVN 7317:2003 (CISPR 24:1997);
 TVCN 7189:2009 (CISPR 22:2006)

Building N:

CISPR 22:2008;
 CNS 13438 (conducted emissions only);
 EN 301 489-1 (*excluding Section 9.6*);
 EN 301 489-17;
 EN 301 489-7;
 EN 301 489-24;
 EN 55022:2010;
 EN 50083-2;
 EN 61000-3-2;
 EN 61000-3-3;
 EN 61000-3-11;
 EN 61000-3-12;
 FCC 47 CFR, Part 15, Subpart B, using ANSI C63.4-2003
 and ANSI C63.4-2009;
 IEC 61000-4-2;
 IEC 61000-4-3;
 IEC 61000-4-4;
 IEC 61000-4-5;
 IEC 61000-4-6;
 IEC 61000-4-8 (no short duration mode);
 IEC 61000-4-11;
 VCCI V-3/2013.04 (*up to 6 GHz*);
 KN 24;
 KN 301-489-01 (conducted emissions only – (*excluding*
Section 9.6);
 KN 301-489-07 (conducted emissions only);
 KN 301-489-17 (conducted emissions only);
 KN 301-489-24 (conducted emissions only);

Test Technology:
EMC/EMI
(Cont'd)


Facility:
Building N:
(cont'd)

Test Method(s)¹:

Technical Requirements for Electromagnetic Interference (RRA Public Notification 2014-8, June 23, 2014);
 Test Methods for Electromagnetic Interference (RRA Announce 2014-37, June 23, 2014);
 Annex 1-11 (KN 61000-3-2, KN 61000-3-12);
 Annex 1-12 (KN 61000-3-3, KN 61000-3-11)

Building B:

Test Methods for Electromagnetic Interference (RRA Announce 2014-37, June 23, 2014) –
 Annex 5 (KN 22 – conducted emissions only);
 Annex 8-1 (KN 301-489-01 – conducted emissions only, *excluding Section 9.6*);
 Annex 8-2 (KN 301-489-07 – conducted emissions only);
 Annex 8-3 (KN 301-489-17 – conducted emissions only);
 Annex 8-4 (KN 301-489-24 – conducted emissions only);
 Technical Requirements for Electromagnetic Susceptibility (RRA Public Notification 2014-9, June 23, 2014);
 Test Methods for Electromagnetic Susceptibility (RRA Announce 2014-38, June 23, 2014) –
 Annex 1-1 – 1-7 (KN-61000-4-2, -3, -4, -5, -6, -8 (no short duration mode), -11)
 Annex 5 (KN 24);
 Annex 8-1 (KN 301 489-01); Annex 8-2 (KN 301 489-07);
 Annex 8-3 (KN 301 489-17); Annex 8-4 (KN 301 489-24);
 QCVN 18:2010/BTTTT (EN 300 399:1998);
 TCVN 7317:2003 (CISPR 24:1997);
 TVCN 7189:2009 (CISPR 22:2006)
 CISPR 22:2008 (conducted emissions only);
 CNS 13438 (conducted emissions only);
 EN 301 489-1 (*excluding Section 9.6*);
 EN 301 489-7;
 EN 301 489-17;
 EN 301 489-24;
 EN 55022:2010 (conducted emissions only);
 EN 50083-2;
 EN 61000-3-2;
 EN 61000-3-3;
 EN 61000-3-11;
 EN 61000-3-12;
 FCC 47 CFR, Part 15, Subpart B, using ANSI C63.4-2003 and ANSI C63.4-2009 (conducted emissions only);
 IEC 61000-4-2;
 IEC 61000-4-3;
 IEC 61000-4-4;
 IEC 61000-4-5;
 IEC 61000-4-6;
 IEC 61000-4-8 (no short duration mode);
 IEC 61000-4-11;
 VCCI V-3/2013.04 (Conducted Emissions Only);
 KN 24;
 KN 301-489-01
 (conducted emissions only – *excluding Section 9.6*);



Test Technology:
EMC/EMI
(Cont'd)

Facility:
Building B:
(cont'd)

Test Method(s)¹:
 KN 301-489-07 (conducted emissions only);
 KN 301-489-17 (conducted emissions only);
 KN 301-489-24 (conducted emissions only);
 Technical Requirements for Electromagnetic Interference
 (RRA Public Notification 2014-8, June 23, 2014);
 Test Methods for Electromagnetic Interference
 (RRA Announce 2014-37, June 23, 2014) –
 Annex 1-11 (KN 61000-3-2, KN 61000-3-12);
 Annex 1-12 (KN 61000-3-3, KN 61000-3-11);
 Annex 5 (KN 22 – conducted emissions only);
 Annex 8-1 (KN 301-489-01 – conducted emissions only,
excluding Section 9.6);
 Annex 8-2 (KN 301-489-07 – conducted emissions only);
 Annex 8-3 (KN 301-489-17 – conducted emissions only);
 Annex 8-4 (KN 301-489-24 – conducted emissions only);
 Technical Requirements for Electromagnetic Susceptibility
 (RRA Public Notification 2014-9, June 23, 2014);
 Test Methods for Electromagnetic Susceptibility
 (RRA Announce 2014-38, June 23, 2014) –
 Annex 1-1 – 1-7 (KN-61000-4-2, -3, -4, -5, -6, -8 (no short
 duration mode), -11);
 Annex 5 (KN 24);
 Annex 8-1 (KN 301 489-01); Annex 8-2 (KN 301 489-07)

Radio

Building P: Test Methods for Electromagnetic Susceptibility
 (RRA Announce 2014-38, June 23, 2014) –
 Annex 8-3 (KN 301 489-17); Annex 8-4 (KN 301 489-24);
 QCVN 18:2010/BTTTT (EN 300 399:1998);
 TCVN 7317:2003 (CISPR 24:1997);
 TVCN 7189:2009 (CISPR 22:2006)
 (Conducted Emissions Only);
 CTIA Test Plan for RF performance Evaluation of WiFi
 Mobile Converged Devices;
 CTIA Test Plan for Wireless Over-the-Air Performance;
 EN 301 908-1 Section 4.2.2;
 EN 301 511 Section 4.2.16-19;
 EN 302 326-2;
 EN 302 544-1; EN 302 544-2;
 EN 302 774;
 EN 302 623;
 FCC 47 CFR, Part 2 - *excluding Cl. 2.1091 & 2.1093 (SAR)*;
 FCC 47 CFR, Part 15, Subpart C, using ANSI C63.10
 (*up to 40 GHz*);
 FCC 47 CFR, Part 15.247;
 FCC 47 CFR, Part 15.407;
 FCC 47 CFR, Part 22, Subpart K;
 FCC 47 CFR, Part 24, Subpart E;
 FCC 47 CFR, Part 25, Subpart C;
 FCC 47 CFR, Part 27, Subpart D;
 FCC 47 CFR, Part 27, Subpart M;
 HKTA 1039;
 LP 0002 (*up to 40 GHz*) - *excluding Cl. 5.20 (SAR)*;
 RSS-129 Sections 8.1.1, 10;

Peter Mlyns

Test Technology:

Radio
(Cont'd)

Facility:

Building P:
(cont'd)

Test Method(s)¹:

RSS-132 Sections 4.5.1, 4.6;
RSS-192;
RSS-193;
RSS-195;
RSS-210;
Conformity Assessment Procedure of Radio Equipment
(RRA Announce 2013-33, July 26, 2013)
Regulations on Radio Equipment (MSIP Public Notification
2014-50, July 16, 2014);
EN300328;
EN301893;
EN300440-1 Sections 7.1, 7.3, 8.4;
SKMM WTS SRD;
IDA TS SRD;
QCVN 54:2011/BTTTT;
QCVN 65:2013/BTTTT

Building I:

HKTA 1039;
LP0002 (up to 40 GHz) - excluding Cl 5.20 (SAR);
Conformity Assessment Procedure of Radio Equipment
(RRA Announce 2013-33, July 26, 2013)
Regulations on Radio Equipment (MSIP Public Notification
2014-50, July 16, 2014);
EN300328;
EN301893
(excluding section 4.7 and section 5.3.8 related to DFS);
EN300440-1 Sections 7.1, 7.3, 8.4;
FCC 47 CFR, Part 2 - (excluding Cl. 2.1091 & 2.1093 (SAR));
FCC 47 CFR, Part 15, Subpart C, using ANSI C63.10
(up to 40 GHz);
FCC 47 CFR, Part 15.247;
FCC 47 CFR, Part 15.407;
SKMM WTS SRD (excluding DFS);
IDA TS SRD (excluding DFS);
QCVN 54:2011/BTTTT

Building B:

HKTA 1039 (conducted testing only);
LP0002 (conducted testing only, up to 40 GHz);
Conformity Assessment Procedure of Radio Equipment
(RRA Announce 2013-33, July 26, 2013)
Regulations on Radio Equipment (MSIP Public Notification
2014-50, July 16, 2014);
EN300328 (conducted testing only);
EN301893 (conducted testing only);
EN300440-1 Sections 7.1, 7.3, 8.4 (conducted testing only);
FCC 47 CFR, Part 2 - excluding Cl. 2.1091 & 2.1093 (SAR);
FCC 47 CFR, Part 15, Subpart C, using ANSI C63.10
(up to 40 GHz);
FCC 47 CFR, Part 15.247;
FCC 47 CFR, Part 15.407;
SKMM WTS SRD (conducted testing only);
IDA TS SRD (conducted testing only);
QCVN 54:2011/BTTTT

Peter Nguyen

On the following products or types of products:

Information Technology Equipment (ITE), Telecommunications Network Equipment (TNE),
Intentional Radiators

¹When the date, revision, or edition of a test method standard is not identified on the scope of accreditation, the laboratory is required to be using the current version within one year of the date of publication, per part C., Section 1 of A2LA R101 - *General Requirements- Accreditation of ISO-IEC 17025 Laboratories*.

Peter M. Meyer



American Association for Laboratory Accreditation

Accredited Laboratory

A2LA has accredited

CISCO SYSTEMS, INC.

San Jose, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (*refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009*).

Presented this 6th day of November 2014.




President & CEO
For the Accreditation Council
Certificate Number 1178.01
Valid to November 30, 2016

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

A handwritten signature is located in the bottom right corner of the document.



Cisco Channel Partner Program

Select Certified Partner



Awarded to
**Integradora en Infraestructura Tecnológica
ITESA, SA. de CV.**

MEXICO
valid until March 3, 2019

Validate this certificate at:
cisco.com/go/partnerlocator

Cisco Partner Ecosystem Programs
Global Partner Organization

A handwritten signature in black ink, located in the bottom right corner of the page.



America

CERTIFICATE

The Certification Body of
TÜV SÜD AMERICA INC.

hereby certifies that

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706 USA

(All facilities listed on Appendix)

has implemented an Environmental Management System
in accordance with:

ISO 14001:2004

The scope of this Environmental Management System includes:

**Design, Development, Manufacturing
Operations, Sales, Services and Support for
Networking, Data Center, Communications,
Video, Collaboration and Security Products,
Solutions and Services**

Certificate Expiry Date: January 30, 2017

Certificate Registration No: 951 00 0876

Effective Date: March 9, 2015



Gary W. Minks
Gary W. Minks
VP, Regulatory Affairs



[Signature]



America

CERTIFICATE

North America

- 1,2,3,4 170 West Tasman Drive, San Jose, CA 95134 United States
- 1,2,3,4 2200 East President George Bush Highway, Richardson, TX 75082 United States
- 1,3,4 9501 Technology Blvd, West Office Center, Rosemont, Illinois 60018 United States
- 1,3,4 5400 Airport Blvd., Boulder, CO 80301 United States
- 1,3,4 9155 East Nichols Avenue, Suite 400, Englewood, CO 80112 United States
- 1,2,3,4 12515 Research Blvd., Building 2, Austin, TX 78759 United States
- 1,2,3,4 7025 Kit Creek Road, PO Box 14987, Research Triangle Park, NC 27709-4987 United States
- 1,3,4 One Penn Plaza, 6th & 9th Floors, New York, NY 10119 United States
- 1,2,3,4 1414 Massachusetts Avenue, Boxborough, MA 01719 United States
- 1,3,4 13600 Dulles Technology Drive, Herndon, VA 20171 United States
- 1,3 200 Ames Pond, Tewksbury, MA 01876 United States
- 1,2,3,4 5030 Sugarloaf Parkway, Lawrenceville, Georgia 30044 United States

Asia

- 1,2,3,4 SEZ Unit, Cessna Business Park, Kadubeesanahalli Village, Varthur Hobli, Sarjapur Marathalli Outer Ring Road, Bangalore, Karnataka 560 103 India
- 1,2,3,4 9-7-1, Akasaka, Minato-ku, Tokyo, Kanto, 107-6227 Japan
- 1,2,3,4 UE BizHub East, 8 Changi Business Park Avenue 1, Singapore, Singapore 486018
- 1,3,4 7-12/F Building C, Yintai Office Tower, Beijing Yintai Centre, No. 2 Jianguomenwai Ave, Chaoyang District, Beijing, 100 022 China
- 1,2,3,4 Great Eagle Centre, 23 Harbour Road, Lvl's 10, 31 &, Room 2901 to 2905, Hong Kong, Hong Kong
- 1,2,3,4 Block A of Keji Building, Caohejing Hi-Tech Park, 900 Yishan Lu Street, Shanghai, 200 233 China
- 1,3,4 32 HaMeiacha St., (HaSharon Bldg), P.O.Box 8735, I.Z.Sapir, South Netanya, Hamerkaz 42504 Israel

Scope Activities – 1=Design and Development 2=Manufacturing 3=Sales 4=Services and Support

Appendix 1 of 2 – Certificate 951 00 0876

TÜV SÜD AMERICA INC • 10 Centennial Drive • Peabody, MA 01960 USA • www.TUVamerica.com

TUV®



America

CERTIFICATE


Australia

- 1,3,4 Levels 8-14, 80 Pacific Highway, North Sydney, Sydney NSW 2060 Australia
 1, 4 The Forum, 201 Pacific Highway, St. Leonards, NSW 2065 Australia

Europe

- 1,3,4 Pegasus Parc, De Kleetiaan 6A, Diegem, Brabant 1831 Belgium
 1,3,4 10 New Square Park, Bedfont Lakes, Feltham TW14 8HA United Kingdom
 1,3,4 L'Atlantis, 11, Rue Camille Desmoulins, Issy Les Moulineaux, Ile De France 92782 France
 1,3,4 200 Longwater Avenue, Reading RG2 6GB United Kingdom
 1,2,3,4 Torri Bianche-Faggio Bldg Lot H1, Via Torri Bianche 7, Vimercate, Lombardia 20059 Italy
 1,2,3,4 Haarlerbergpark, Haarlerbergweg 13-19, Amsterdam, Noord-Holland 1101 CH Netherlands
 1,3 Oranmore Business Park, Oranmore, Galway, Galway Connacht Ireland

Scope Activities - 1=Design and Development 2=Manufacturing 3=Sales 4=Services and Support



Appendix 2 of 2 - Certificate 951 00 0876



CERTIFICATE

The Certification Body of
TÜV SÜD AMERICA INC.

hereby certifies that

Cisco Systems, Inc.
170 West Tasman Drive
San Jose, CA 95134-1706

(All facilities listed on Appendix)

has implemented a Quality Management System
in accordance with:

ISO 9001:2008

The scope of this Quality Management System includes:

**Design, Development, Manufacturing Operations,
Sales, Services and Support for Networking, Data
Center, Communications, Video, Collaboration and
Security Products, Solutions and Services**

Certificate Expiry Date: February 19, 2018

Certificate Registration No: 951 00 0875

Effective Date: February 20, 2015




Gary W. Minks

Gary W. Minks
VP, Regulatory Affairs



[Handwritten signature]





America

CERTIFICATE

3	North America	3,4	North America
3	Canada: Calgary, Alberta	1,3,4	US: Moorestown, NJ
3	Canada: Edmonton, Alberta	3	US: New York, NY
3	Canada: Halifax, Nova Scotia	3	US: North Charleston, SC
1,2,3,4	Canada: Kanata, Ontario	3	US: Norwalk, CT
3,4	Canada: Montreal, Quebec	3	US: Oakland Park, FL
3	Canada: Quebec	3,4	US: Oklahoma City, OK
3	Canada: Ontario	3	US: Omaha, NE
3	Canada: Regina, Saskatchewan	3,4	US: Orlando, FL
1,3,4	Canada: Toronto, Ontario	3,4	US: Overland Park, KS
1,3	Canada: Vancouver, British Columbia	3	US: Pawnee, WI
3	Canada: Winnipeg, Manitoba	3,4	US: Phoenix, AZ
3,4	Costa Rica: San Jose	3	US: Pittsburgh, PA
3	Dominican Republic: Santo Domingo	3	US: Pittsford, NY
2,3,4	Mexico: Guadalajara	3,4	US: Pleasanton, CA
3,4	Mexico: Mexico City	3	US: Reno, NV
2	Mexico: Juarez	1,2,3,4	US: Research Triangle Park, NC
3,4	Mexico: San Pedro Garza Garcia	1,2,3,4	US: Richardson, TX
3	Panama: Panama	1,2,3,4	US: Richfield, OH
3	Puerto Rico: San Juan	3,4	US: Richmond, VA
3,4	US: Albany, NY	1,3,4	US: Saint Petersburg, FL
3	US: Albuquerque, NM	1,3,4	US: Salt Lake City, UT
3	US: Anchorage, AK	3,4	US: San Antonio, TX
1,3	US: Allentown, PA	1,3,4	US: San Diego, CA
1,3,4	US: Atlanta, GA	1,3,4	US: San Francisco, CA
3	US: Austin, TX	1,2,3,4	US: San Jose, CA
1,3,4	US: Baton Rouge, LA	1,3,4	US: Seattle, WA
3,4	US: Bellevue, WA	3	US: Southfield, MI
3,4	US: Bentonville, AR	3	US: Spokane, WA
3	US: Birmingham, AL	3	US: Tallahassee, FL
3	US: Bloomington, IL	1,3	US: Tewksbury, MA
3,4	US: Bloomington, MN	3	US: Tucson, AZ
3	US: Boise, ID	3,4	US: Tulsa, OK
3,4	US: Boston, MA	3,4	US: Washington, DC
1,3,4	US: Boulder, CO	3	US: West Des Moines, IA
1,2,3,4	US: Boxborough, MA	3,4	US: Woodcliff Lake, NJ
3,4	US: Nashville, TN	3	Asia
3	US: Camp Hill, PA	3	Azerbaijan: Baku
3	US: Carmel, IN	3	Bahrain: Al Manamah
3,4	US: Charlotte, NC	3	Bangladesh: Dhaka
3,4	US: Chesterfield, MO	1,3,4	China: Beijing
1,3,4	US: Chicago, IL	3	China: Chengdu
3,4	US: Cincinnati, OH	3	China: Chongqing
3,4	US: Colorado Springs, CO	3	China: Fuzhou
1,3,4	US: Columbia, MD	3,4	China: Guangzhou
3	US: Columbia, SC	3	China: Hangzhou
3	US: Cordova, TN	3	China: Nanjing
1,3,4	US: Denver, CO	1,2,3,4	China: Shanghai
3,4	US: Dublin, Ohio	2,3	China: Shenzhen
3	US: Englewood, CO	3	China: Hubei
3	US: Farmington, CT	3	China: Xian
3	US: Fresno, CA	1,2,3,4	China: Hong Kong
3,4	US: Gold River, CA	3	China: Hunan
3	US: Grand Rapids	1,2,3,4	India: Bangalore
3	US: Greensboro, NC	3	India: Calcutta
1,3,4	US: Herndon, VA	1,3	India: Chennai
3	US: Honolulu, HI	3	India: Hyderabad
1,3,4	US: Houston, TX	3,4	India: Mumbai
3	US: Grand Rapids	3,4	India: New Delhi
1,3,4	US: Irvine, CA	1,3,4	India: Pune
1,3,4	US: Costa Mesa, CA	3,4	Indonesia: Jakarta
3,4	US: Irving, TX	1,3,4	Israel: South Netanya
1,3,4	US: Iselin, NJ	3	Japan: Fukuoka
3,4	US: Jacksonville, FL	3	Japan: Nagoya
3	US: Knoxville, TN	3,4	Japan: Osaka
1,3,4	US: Lake Oswego, OR	3	Japan: Sapporo
3	US: Las Vegas, NV	3	Japan: Sendai
1,2,3,4	US: Lawrenceville, GA	1,2,3,4	Japan: Tokyo
3,4	US: Glendale, CA	3	Jordan: Amman
3	US: Louisville, KY	3	Kazakhstan: Almaty
3	US: Madison, WI	3	Kuwait: Kuwait City
1,3,4	US: Malvern, PA	3	Lebanon: Beirut
3,4	US: Melville, NY	2,3	Malaysia: Bayan Lepas
3	US: Metairie, LA	3,4	Malaysia: Kuala Lumpur
3,4	US: Miami, FL		

<http://www.tuvamerica.com/cisco/9001/>
http://www.cisco.com/web/about/ac50/ac208/ac243/about_cisco_quality_certifications_home.html

Appendix 1 - Certificate 951 00 0875



America

CERTIFICATE

3,4	Asia		
3,4	Philippines: Makati	1,2,3,4	Europe
1,3,4	Qatar: Doha	3	Belgium: Kortrijk
3	Russia: Moscow	3	Bosnia and Herzegovina: Sansjevo
3	Russia: Novosibirsk	3	Bulgaria: Sofia
3	Russia: Saint Petersburg	3	Croatia: Zagreb
3,4	Saudi Arabia: Jeddah	1,3,4	Cyprus: Lefkosa
2,3,4	Saudi Arabia: Riyadh	3	Czech Republic: Prague
3	Singapore: Singapore	3	Denmark: Aalborg
3	South Korea: Daejeon	3	Denmark: Copenhagen
3,4	South Korea: Pusan	3,4	Finland: Espoo
3	South Korea: Seoul	1,3,4	France: Mougins
3	Sri Lanka: Colombo	3	France: Cesson Sevigne
2,3,4	Taiwan: Taipei	1,3,4	France: Issy les Moulineaux
2,3,4	Thailand: Bangkok	3	France: Lyon
3	Turkey: Ankara	3	France: Strasbourg
3,4	Turkey: Istanbul	3	France: Toulouse
3,4	United Arab Emirates: Dubai	4	France: Gellesville
3	Vietnam: Hanoi	3,4	Germany: Berlin
3	Vietnam: Ho Chi Minh City	3	Germany: Bonn
3	Australia/New Zealand	3,4	Germany: Düsseldorf
3	Australia: Adelaide	1,3,4	Germany: Eschborn
3,4	Australia: Brisbane	3	Germany: Halberstadt
4	Australia: Canberra	1,4	Germany: Hamburg
1,3,4	Australia: Sydney, Chatswood	3	Germany: Kassel
3,4	Australia: Melbourne	3	Germany: Mannheim
3	Australia: North Sydney	3	Germany: Munich
1,4	Australia: Perth	1	Germany: Nuremberg
3	Australia: Sydney, St. Leonards	3	Germany: Rastatt
3	New Zealand: Auckland	1,3,4	Germany: Stuttgart
3	New Zealand: Wellington	3	Greece: Athens
3,4	South America	3,4	Hungary: Budapest
3	Argentina: Buenos Aires	3	Iceland: Reykjavik
3,4	Brazil: Brasilia	3,4	Ireland: Dublin
3,4	Brazil: Rio De Janeiro	1,3	Ireland: Galway
3,4	Brazil: Sao Paulo	3,4	Italy: Rome
3,4	Chile: Santiago	1,2,3,4	Italy: Vercelli
3,4	Colombia: Bogota	3	Latvia: Riga
3	Colombia: Medellin	3	Lithuania: Vilnius
3	Ecuador: Quito	3	Luxembourg: Luxembourg
3	Peru: Lima	3	Macedonia, Republic of: Skopje
3	Venezuela: Caracas	1,2,3,4	Netherlands: Amsterdam
3	Africa	1,2,3,4	Norway: Oslo
3	Algeria: Algiers	3,4	Poland: Warsaw
3,4	Egypt: Cairo	3,4	Poland: Krakow
3	Senegal: Dakar	3,4	Portugal: Lisbon
3	Kenya: Nairobi	3	Romania: Bucharest
3	Libyan Arab Jamahiriya: Tripoli	3	Serbia: Belgrade
3	Mauritius: Quatre-Bornes	3	Slovakia: Bratislava
3	Morocco: Casablanca	3	Slovenia: Ljubljana
3	Nigeria: Lagos	3,4	Spain: Barcelona
3	South Africa: Cape Town	3,4	Spain: Madrid
3,4	South Africa: Johannesburg	3	Sweden: Goteborg
3	South Africa: Pretoria	3,4	Sweden: Stockholm
3	Tunisia: Tunis	3	Switzerland: Bern
3	Europe	3,4	Switzerland: Zurich
3	Austria: Salzburg	1,3	Switzerland: Rolle
1,3,4	Austria: Vienna	1	Switzerland: Ecublens
1,3,4	Belgium: Diagam	3,4	Ukraine: Kiev
		1,3,4	United Kingdom: Edinburgh
		1,2,3,4	United Kingdom: Feltham
		1,3,4	United Kingdom: Glasgow
		1,3,4	United Kingdom: London
		3,4	United Kingdom: Manchester
		1,3,4	United Kingdom: Reading

Scope Activities - 1=Design and Development 2=Manufacturing 3=Sales 4=Services and Support

<http://www.tuvamerica.com/cisco9001/>
http://www.cisco.com/web/about/ac50/ac208/ac243/about_cisco_quality_certifications_home.html

Appendix 2 - Certificate 951 00 0875



Cisco Catalyst 3850 Series Switches

The digital transformation: Converged wired and wireless access and aggregation

The promise of digital for your business is all about innovating more quickly while reducing risk, cost, and complexity. It will be your network that forms the foundation of your business's transformation.

But supporting your digital organization will require your network to move beyond just connectivity to be a platform for insights, automation, and security.

This is the power of the Cisco® Digital Network Architecture (Cisco DNA™).

Cisco DNA is a monumental shift on how to design and build networks. The Cisco Catalyst® 3850 Series, as part of the Cisco DNA portfolio of next-generation enterprise-class stackable Ethernet and Multigigabit Ethernet access and aggregation layer switches, securely enables time-saving virtualization, greater automation, and valuable analytics data that directly address your evolving business needs, including less cost to install and operate.

The Cisco Catalyst 3850 Series provides capabilities that ideally suited to support the convergence of wired and wireless access. The new Cisco Unified Access Data™ Plane (UADP) Application-Specific Integrated Circuit (ASIC) powers the switch and enables uniform wired-wireless policy enforcement, application visibility, flexibility, and application optimization. This convergence is built on the resilience of the new and improved Cisco StackWise®-480 technology.

The Cisco Catalyst 3850 Series Switches support full IEEE 802.3at Power over Ethernet Plus (PoE+), Cisco Universal Power Over Ethernet (Cisco UPOE®), modular and field-replaceable network modules, RJ-45 and fiber-based downlink interfaces, and redundant fans and power supplies.

Product overview

- Integrated wireless controller capability with:
 - Up to 40G of wireless capacity per switch (48-port RJ45 models)
 - Support for up to 100 access points and 2000 wireless clients on each switching entity (switch or stack)
- 24 and 48 10/100/1000Mbps data PoE+ and Cisco UPOE models with Energy-Efficient Ethernet (EEE)
- 24 and 48 100Mbps/1/2.5/5/10 Gbps Cisco UPOE models with Energy-Efficient Ethernet (EEE)
- 12- and 24-port 1 Gigabit Ethernet SFP-based models
- 12- and 24-port 1/10 Gigabit Ethernet SFP+-based models
- 48-port 1/10 Gigabit Ethernet SFP+ model with 4 fixed 40 Gigabit Ethernet QSFP+ uplinks
- Cisco StackWise-480 technology provides scalability and resiliency with 480 Gbps of stack throughput¹
- Cisco StackPower® technology provides power stacking among stack members for power redundancy¹

¹ StackWise and StackPower technologies are not supported on the 48-port SFP+ switch model.

- Five optional uplink modules² with 4 x Gigabit Ethernet, 2 x 10 Gigabit Ethernet, 4 x 10 Gigabit Ethernet³, 8 x 10 Gigabit Ethernet⁴, or 2 x 40 Gigabit Ethernet QSFP+⁴ ports
- Dual redundant, modular power supplies and three modular fans providing redundancy
- Full IEEE 802.3at (PoE+) with 30W power on all copper ports in 1 Rack Unit (RU) form factor
- Cisco UPOE with 60W power per port in 1 Rack Unit (RU) form factor
- IEEE 802.3bz (2.5/5 G/s BASE-T) to go beyond 1 Gb/s with existing Cat5e and Cat6
- IEEE 802.1ba AV Bridging (AVB) built-in to provide better AV experience for including improved time synchronization and QoS
- Software support for IPv4 and IPv6 routing, multicast routing, modular Quality of Service (QoS), Flexible NetFlow (FNF), and enhanced security features
- Single universal Cisco IOS® Software image across all license levels, providing an easy upgrade path for software features
- Cisco DNA services delivered through Cisco ONE™ Software, providing simplified, high-value solutions with license portability and flexibility
- Support for AES-256 with the powerful MACSEC 256-bit for SFP+ and Multigigabit models and 128-bit encryption algorithm available on all models
- Enhanced Limited Lifetime Warranty (E-LLW) with Next Business Day (NBD) advance hardware replacement and 90-day access to Cisco Technical Assistance Center (TAC) support

Switch models and configurations

All switches ship with one of the five power supplies (350WAC, 715WAC, 750WAC, 1100WAC, or 440WDC)⁵.

Figures 1 through 4 show the Cisco Catalyst 3850 Series Switches.

Figure 1. Cisco Catalyst 3850 Series Switches



² Optional uplink modules are not supported on the 48-port 10G SFP+ switch model.

³ Compatible only with the 48-port RJ45 models and with the 12-port (or higher) 10 Gigabit capable models.

⁴ Compatible only with Cisco Catalyst 3850 Multigigabit and 24-port SFP+ switch models.

⁵ The 48-port 10G SFP+ switch model will only support dedicated power supplies with front-to-back and back-to-front configurations.

Figure 2. Cisco Catalyst 3850 Series Switches with 12 and 24 1/10 Gigabit Ethernet SFP+ ports

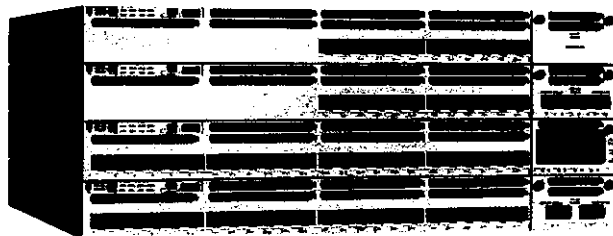


Figure 3. Cisco Catalyst 3850 Series Switches with 12 and 24 1 Gigabit Ethernet SFP ports

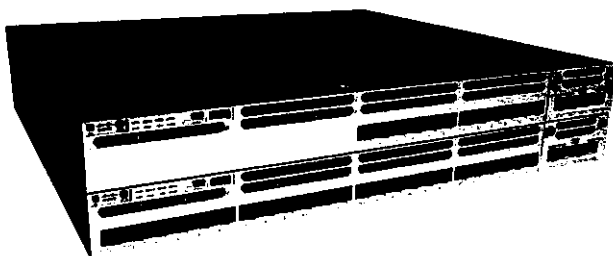


Figure 4. Cisco Catalyst 3850 Series Switches with 10 Gigabit Ethernet 48 ports




Table 1 shows the Cisco Catalyst 3850 Series configurations.

Table 1. Cisco Catalyst 3850 Series configurations

Model	Total 10/100/1000 or SFP or SFP+ ports	Default AC power supply	Available PoE power	POE budget with 1100W secondary PS	StackWise-480	StackPower
WS-C3850-24T	24	350WAC	-		Yes	Yes
WS-C3850-24P	24 PoE+	715WAC	435W	1535W		
WS-C3850-48P	48 PoE+					
WS-C3850-48F	48 PoE+	1100WAC	800W	1900W		
WS-C3850-24U	24 UPOE	1100WAC	800W	1900W		
WS-C3850-48U	48 UPOE	1100WAC	800W	1900W		
WS-C3850-24XU	24 UPOE (100Mbps/1/2.5/5/10 Gbps)	1100WAC	580W	1680W		
WS-C3850-12X48U	48 UPOE (with 12 100Mbps/1/2.5/5/10 Gbps Ports)	1100WAC	630W	1730W		
WS-C3850-12S	12 SFP	350WAC				
WS-C3850-24S	24 SFP					
WS-C3850-12XS	12 1/10G SFP+	350WAC	-			
WS-C3850-24XS	24 1/10G SFP+	715 WAC	-			
WS-C3850-48XS	48 1/10G SFP+	750WAC (front to back)	-		No	No

Network modules

The Cisco Catalyst 3850 Series Switches support five optional network modules for uplink ports. The default switch configuration does not include the network module. At the time of switch purchase the customer has the flexibility to choose from the network modules described in Table 2.

Figure 5 shows the following network modules:

- 4 x Gigabit Ethernet with Small Form-Factor Pluggable (SFP) receptacles
- 2 x 10 Gigabit Ethernet with SFP+ or 4 x Gigabit Ethernet with SFP receptacles
- 4 x 10 Gigabit Ethernet with SFP+ receptacles (supported only on the 48-port Gigabit Ethernet models or on the 12-port or higher 10 Gigabit Ethernet models)

Figure 5. Network modules with four Gigabit Ethernet, two 10 Gigabit Ethernet SFP+, or four 10 Gigabit Ethernet SFP+ interfaces


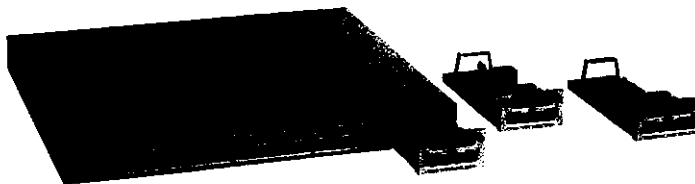


Figure 6 shows the following network modules:

- 8 x 10 Gigabit Ethernet with Small Form-Factor Pluggable+ (SFP+) receptacles
- 2 x 40 Gigabit Ethernet with Quad Small Form-Factor Pluggable+ (QSFP+) receptacles

Figure 6. Network modules with two 40 Gigabit Ethernet QSFP+ or eight 10 Gigabit Ethernet SFP+ interfaces

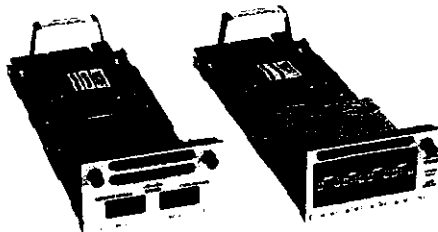

The C3850-NM-4-10G module is supported only on the 48-port Gigabit Ethernet models or on the 12-port or higher 10 Gigabit Ethernet models. The C3850-NM-8x10G and C3850-NM-2x40G modules are supported on the 24-port and 48-port multigigabit switches and also on the 24-port 10G SFP+ switch model. The C3850-NM-4-1G and C3850-NM-2-10G modules are not supported on the 12-port and 24-port SFP+ models.

Table 2. Network module compatibility matrix

Model	Network modules
WS-C3850-24T	C3850-NM-4-1G, C3850-NM-2-10G
WS-C3850-24P	C3850-NM-4-1G, C3850-NM-2-10G, C3850-NM-4-10G
WS-C3850-48P	C3850-NM-4-1G, C3850-NM-2-10G, C3850-NM-4-10G

Model	Network modules
WS-C3850-48F	C3850-NM-4-1G, C3850-NM-2-10G, C3850-NM-4-10G
WS-C3850-24U	C3850-NM-4-1G, C3850-NM-2-10G
WS-C3850-48U	C3850-NM-4-1G, C3850-NM-2-10G, C3850-NM-4-10G
WS-C3850-24XU	C3850-NM-4-1G, C3850-NM-2-10G, C3850-NM-4-10G, C3850-NM-8-10G, C3850-NM-2-40G
WS-C3850-12X48U	C3850-NM-4-1G, C3850-NM-2-10G, C3850-NM-4-10G, C3850-NM-8-10G, C3850-NM-2-40G
WS-C3850-12S	C3850-NM-4-1G, C3850-NM-2-10G
WS-C3850-24S	C3850-NM-4-1G, C3850-NM-2-10G
WS-C3850-12XS	C3850-NM-4-10G
WS-C3850-24XS	C3850-NM-4-10G, C3850-NM-8-10G, C3850-NM-2-40G
WS-C3850-48XS	None

An SFP+ receptacle supports both 10 Gigabit Ethernet and Gigabit Ethernet modules, allowing customers to use their investment in Gigabit Ethernet SFP modules and upgrade to 10 Gigabit Ethernet when business demands change without having to do a comprehensive upgrade of the access switch. In contrast, SFP receptacles can be used only as Gigabit Ethernet ports, as shown in the examples in Table 3.

Table 3. Network module configuration examples

Network module	Interface options	
	10 Gigabit Ethernet SFP+ ports	Gigabit Ethernet SFP ports
4 x Gigabit Ethernet	0	4
4 x Gigabit Ethernet/2 x 10 Gigabit Ethernet network modules	2	0
	1	3
	2	2
	0	4
4 x Gigabit Ethernet/2 x 10 Gigabit Ethernet network modules	2	0
	0	4
	2	2
	3	1
	1	3

Dual redundant modular power supplies

The Cisco Catalyst 3850 Series Switches support dual redundant power supplies.⁶ The switch ships with one power supply by default, and the second power supply can be purchased at the time of ordering the switch or at a later time. If only one power supply is installed, it should always be in power supply bay 1. The switch also ships with three field-replaceable fans. (See Figure 7.)

⁶ The 48-port 10G SFP+ switch model will only support dedicated power supplies with front-to-back and back-to-front configurations.

Figure 7. Dual redundant power supplies

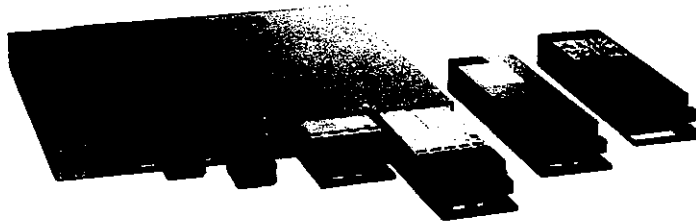


Table 4 shows the different power supplies available in these switches and available PoE power.

Table 4. Power supply models

Model	Default power supply	Available PoE power
24-port data switch	PWR-C1-715WAC	-
24-port PoE switch	PWR-C1-715WAC	435W
48-port PoE switch	PWR-C1-1100WAC	800W
48-port full PoE switch	PWR-C1-1100WAC	800W
24-port UPOE switch	PWR-C1-1100WAC	800W
48-port UPOE switch	PWR-C1-1100WAC	800W
24-port Multigigabit UPOE switch	PWR-C1-1100WAC	580W
48-port Multigigabit UPOE switch	PWR-C1-1100WAC	630W
12-port SFP switch	PWR-C1-350WAC	-
24-port SFP switch	PWR-C1-350WAC	-
12-port SFP+ switch	PWR-C1-350WAC	-
24-port SFP+ switch	PWR-C1-715WAC	-
48-port SFP+ switch (WS-C3850-48XS-S and WS-C3850-48XS-E)	PWR-C3-750WAC-R	-
48-port SFP+ switch (WS-C3850-48XS-F-S and WS-C3850-48XS-F-E)	PWR-C3-750WAC-F	-

In addition to the power supplies listed in Table 5, a 440WDC power supply is available as a configuration option and also as a spare (that is, it can be ordered separately) on all switch models. The DC power supply also delivers PoE capabilities for maximum flexibility (refer to Table 6 for available PoE budget with DC power supplies). Customers can mix and match the AC and DC power supplies in the two available power supply slots. Any of these power supplies can be installed in any of the switches.

Table 5. Available PoE with DC power supply

Model	Number of 440WDC power supplies	Total available PoE budget
24-port PoE switch	1	220W
	2	660W
48-port PoE switch	1	185W
	2	625W
24-port Multigigabit UPOE switch	2	360W
48-port Multigigabit UPOE switch	2	410W

Power over Ethernet Plus (PoE+)

In addition to PoE (IEEE 802.3af), the Cisco Catalyst 3850 Series Switches support PoE+ (IEEE 802.3at standard), which provides up to 30W of power per port. The Cisco Catalyst 3850 Series Switches can provide a lower Total Cost of Ownership (TCO) for deployments that incorporate Cisco IP phones, Cisco Aironet® wireless LAN (WLAN) access points, or any IEEE 802.3at-compliant end device. PoE removes the need for wall power to each PoE-enabled device and eliminates the cost for additional electrical cabling and circuits that would otherwise be necessary in IP phone and WLAN deployments. Table 6 shows the power supply combinations required for different PoE needs.

Table 6. Power supply requirements for PoE and PoE+

	24-port PoE switch	48-port PoE switch
PoE on all ports (15.4W per port)	One PWR-C1-715WAC	One PWR-C1-1100WAC or two PWR-C1-715WAC
PoE+ on all ports (30W per port)	One PWR-C1-1100WAC or two PWR-C1-715WAC	Two PWR-C1-1100WAC or one PWR-C1-1100WAC and one PWR-C1-715WAC

Cisco Universal Power over Ethernet (Cisco UPOE)

Cisco UPOE (Table 7) is a breakthrough technology, offering the following services and benefits.

- 60W per port to enable a variety of end devices such as Samsung VDI client, BT IP turret systems in trading floors, Cisco Catalyst compact switches in retail/hospitality environments, personal Cisco TelePresence® systems, and physical access control devices
- High availability for power and guaranteed uninterrupted services, a requirement for critical applications (e911)
- Lowering OpEx by providing network resiliency at lower cost by consolidating backup power into the wiring closet
- Faster deployment of new campus access networking infrastructures by eliminating the need for a power outlet for every endpoint

Table 7. Power supply requirements for Cisco UPOE

	24-port UPOE switch	48-port UPOE switch	24-port Multigigabit UPOE switch	48-port multigigabit UPOE switch
UPOE (60W per port) on all (24 port switch) or max. 30 ports (48 port switch)	One PWR-C1-1100WAC and one PWR-C1-715WAC	Two PWR-C1-1100WAC	Two PWR-C1-1100WAC	Two PWR-C1-1100WAC

Cisco Catalyst Multigigabit Ethernet technology

Cisco Multigigabit Ethernet is a unique Cisco innovation to the new Cisco Catalyst Ethernet access switches. With the enormous growth of 802.11ac and new wireless applications, wireless devices are promoting the demand for more network bandwidth. This creates a need for a technology that supports speeds higher than 1 Gbps on all cabling infrastructure. Cisco Multigigabit technology allows you to achieve bandwidth speeds from 1 Gbps through 10 Gbps over traditional Cat 5e cabling or above. In addition, the Multigigabit ports on select Cisco Catalyst switches support UPOE, which is increasingly important for next-generation workspaces and Internet of Things (IoT) ecosystems.

Cisco Multigigabit technology offers significant benefits for a diverse range of speeds, cable types, and PoE power. The benefits can be grouped into three different areas:

- **Multiple speeds:** Cisco Multigigabit technology supports autonegotiation of multiple speeds on switch ports. The supported speeds are 100 Mbps, 1 Gbps, 2.5 Gbps, and 5 Gbps on Cat 5e cable and up to 10 Gbps over Cat 6a cabling.
- **Cable type:** The technology supports a wide range of cable types, including Cat 5e, Cat 6, and Cat 6a or above.
- **PoE power:** The technology supports PoE, PoE+, and UPOE for all the supported speeds and cable types.

For more information, visit <https://www.cisco.com/c/en/us/solutions/enterprise-networks/catalyst-multigigabit-switching/index.html>.

SD-Access architecture

What if you could give time back to IT? And provide network access in minutes for any user or device to any application – without compromise?

Cisco Software-Defined Access (SD-Access) is the industry's first intent-based networking solution for the enterprise, built on the principles of Cisco's Digital Network Architecture (Cisco DNA™). SD-Access provides automated, end-to-end segmentation to separate user, device, and application traffic without the need to redesign the network. SD-Access automates user access policy so organizations can make sure the right policies are established for any user or device with any application across the network. This is accomplished with a single network fabric across LAN and WLAN, which creates a consistent user experience anywhere without compromising on security.

Organizations have many challenges today in managing the network to drive business outcomes. These limitations are due to manual configuration and fragmented tool offerings. SD-Access provides:

- A transformational management solution that reduces operational expenses and enhances business agility
- Consistent management of wired and wireless network provisioning and policy
- Automated network segmentation and group-based policy
- Contextual insights for fast issue resolution and capacity planning
- Open and programmable interfaces for integration with third-party solutions

For an overview of key use cases that SD-Access addresses, refer to the [SD-Access Solution Overview](#).

SD-Access licensing

To be able to benefit from the SD-Access architecture, you must purchase an **add-on licensing package**. Such **licensing package** includes the Cisco DNA Essentials and Cisco DNA Advantage options. Add-on licenses have to be purchased for a 3-, 5-, (and hence are also known as term-based licenses). Product SKUs for these packages are given in Table 10 below.

Ordering and managing licenses with smart accounts: Creating smart accounts by using the Cisco Smart Software Manager (SSM) enables you to order devices and licensing packages and also to manage your software licenses from a centralized website. You can set up Cisco SSM to receive daily email alerts and to be notified of expiring add-on licenses that you want to renew. When the license term expires, you can either renew the add-on license to continue using it or deactivate the add-on license and then reload the switch to continue operating with the base license capabilities.

Note: You are not required to deploy Cisco DNA Center just to use one of the license packages.

Table 8 shows the features included in the Essentials and Advantage packages.

Table 8. Essentials and Advantage package features

Feature	Cisco DNA Essentials	Cisco DNA Advantage
Day 0 network bring-up automation Cisco Network Plug-and-Play application, network settings, device credentials	✓	✓
Element management Discovery, inventory, topology, software image, licensing, and configuration management	✓	✓
Element management Patching	x	✓
Network monitoring Product Security Incident Response Team (PSIRT) compliance, end-of-life/end-of-sale reporting, telemetry quotient, client 360, device 360, top talkers/NetFlow/streaming telemetry collection and correlation	✓	✓
Static QoS configuration and monitoring EasyQoS application	✓	✓
Policy-based automation SD-Access, group-based policy for access, app prioritization, monitoring, and path selection; SD-Access with integrated wireless	x	✓
Network assurance and analytics Insights gained from analytics and machine learning for the network, clients and applications that cover onboarding, connectivity, and performance	x	✓

Table 9 shows the product IDs for these licenses.

Table 9. Essentials and Advantage package product IDs

	Product ID	Description
12-port	C3850-DNA-E-12	C3850 DNA Essentials, 12-port term licenses
	C3850-DNA-E-12-3Y	C3850 DNA Essentials, 12-port, 3-year term license
	C3850-DNA-E-12-5Y	C3850 DNA Essentials, 12-port, 5-year term license
	C3850-DNA-A-12	C3850 DNA Advantage, 12-port term licenses
	C3850-DNA-A-12-3Y	C3850 DNA Advantage, 12-port, 3-year term license
	C3850-DNA-A-12-5Y	C3850 DNA Advantage, 12-port, 5-year term license
24-port	C3850-DNA-E-24	C3850 DNA Essentials, 24-port term licenses
	C3850-DNA-E-24-3Y	C3850 DNA Essentials, 24-port, 3-year term license
	C3850-DNA-E-24-5Y	C3850 DNA Essentials, 24-port, 5-year term license
	C3850-DNA-A-24	C3850 DNA Advantage, 24-port term licenses
	C3850-DNA-A-24-3Y	C3850 DNA Advantage, 24-port, 3-year term license
	C3850-DNA-A-24-5Y	C3850 DNA Advantage, 24-port, 5-year term license

	Product ID	Description
48-port	C3850-DNA-E-48	C3850 DNA Essentials, 48-port term licenses
	C3850-DNA-E-48-3Y	C3850 DNA Essentials, 48-port, 3-year term license
	C3850-DNA-E-48-5Y	C3850 DNA Essentials, 48-port, 5-year term license
	C3850-DNA-A-48	C3850 DNA Advantage, 48-port term licenses
	C3850-DNA-A-48-3Y	C3850 DNA Advantage, 48-port, 3-year term license
	C3850-DNA-A-48-5Y	C3850 DNA Advantage, 48-port, 5-year term license
Spares	C3850-DNA-E-12=	C3850 DNA Essentials, 12-port term licenses spare
	C3850-DNA-A-12=	C3850 DNA Advantage, 12-port term licenses spare
	C3850-DNA-E-24=	C3850 DNA Essentials, 24-port term licenses spare
	C3850-DNA-A-24=	C3850 DNA Advantage, 24-port term licenses spare
	C3850-DNA-E-48=	C3850 DNA Essentials, 48-port term licenses spare
	C3850-DNA-A-48=	C3850 DNA Advantage, 48-port term licenses spare

Benefits

Converged wired plus wireless access


The Cisco Catalyst 3850 is the first stackable access switching platform that enables wired plus wireless services on a single Cisco IOS XE Software-based platform. With this, Cisco has pioneered a host of rich capabilities such as high availability based on Stateful Switchover (SSO) on stacking, granular QoS, security, and Flexible NetFlow (FNF) across wired and wireless in a seamless fashion. Also, the wired plus wireless features are bundled into a single Cisco IOS Software image, which reduces the number of software images that users have to qualify/certify before enabling them in their network. The single console port for Command-Line Interface (CLI) management reduces the number of touch points to manage for wired plus wireless services, thereby reducing network complexity, simplifying network operations, and lowering the TCO to manage the infrastructure.

Converged wired plus wireless not only improves wireless bandwidth across the network but also the scale of wireless deployment. Each 48-port Cisco Catalyst 3850 provides 40 Gbps of wireless throughput (20 Gbps on the 24-port/12-port models). This wireless capacity increases with the number of members in the stack. This makes sure that the network can scale with current wireless bandwidth requirements, as dictated by IEEE 802.11n-based access points and with future wireless standards such as IEEE 802.11ac. Additionally, the Cisco Catalyst 3850 distributes the wireless controller functions to achieve better scalability. Each Cisco Catalyst 3850 switch/stack can operate as the wireless controller in two modes (Figure 8):

- Mobility Agent (MA):** This is the default mode in which a Cisco Catalyst 3850 switch ships. In this mode the switch is capable of terminating the CAPWAP tunnels from the access points and providing wireless connectivity to wireless clients. Maintaining wireless client databases and configuring and enforcing security and QoS policies for wireless clients and access points can be enforced in this mode. No additional license on top of IP Base is required to operate in the mobility agent mode.
- Mobility Controller (MC):** In this mode, the Cisco Catalyst 3850 switch can perform all the mobility agent tasks in addition to mobility coordination, Radio Resource Management (RRM), and Cisco CleanAir® coordination within a mobility subdomain. The mobility controller mode can be enabled on the switch CLI. IP Base license level is required when the Cisco Catalyst 3850 switch is acting as the mobility controller. A centrally located Cisco 5508 Wireless LAN Controller (WLC 5508), Cisco Wireless Services Module 2 (WiSM2) (when running AireOS Version 7.3), and Wireless LAN Controller 5760 can also perform this role for larger deployments.

- With mobility agents located in the wiring closets providing 40 Gbps of wireless per 48-port Gigabit Ethernet RJ45 switch (n x 40 Gbps for a stack of n switches) and mobility controllers managing some of the central wireless functions, the converged access-based wireless deployment provides best-in-class scalability for wireless and significantly improved wireless throughput.

Figure 8. Mobility Controller (MC) and Mobility Agent (MA)

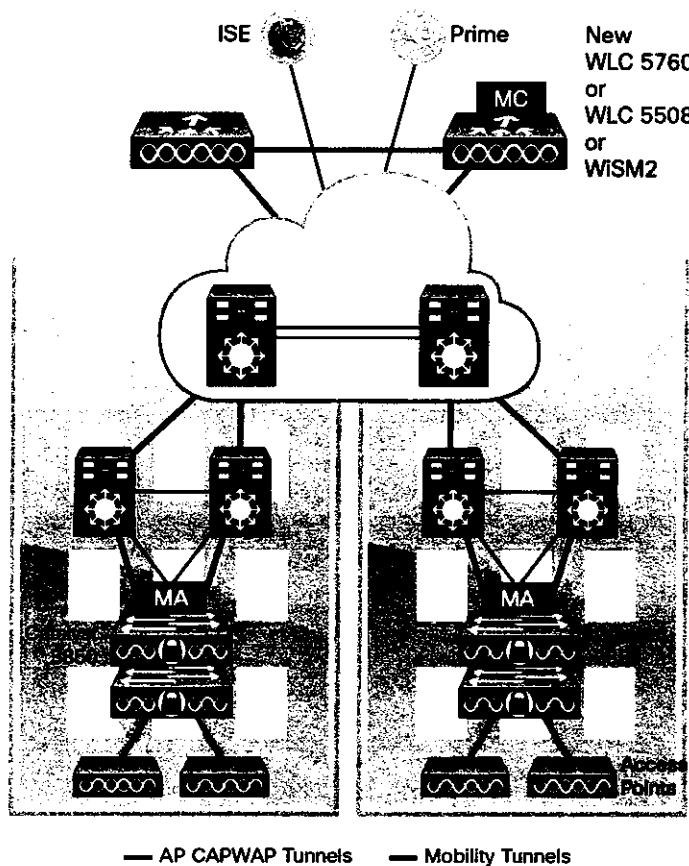

For more information about Converged Wired plus Wireless Access, refer to the Q&A document here:

<https://www.cisco.com/c/dam/en/us/products/collateral/switches/catalyst-3850-series-switches/cisco-catalyst-3850-series-switches-faq.pdf>.

Distributed intelligent services

Flexible NetFlow (FNF)

Full visibility into the wired plus wireless traffic is achieved because of the access point Control and Provisioning Wireless Access Points (CAPWAP) tunnel termination on the switch. This helps identify users and user traffic flow in order to identify potential attackers and take corrective action at the access layer before the attack penetrates further into the network. This is achieved using FNF, which monitors every single flow entering and exiting the switch stack for wired and wireless users. It also helps identify the top wired/wireless talkers and enforce appropriate bandwidth provisioning policies.

QoS

The Cisco Catalyst 3850 switch has advanced wired plus wireless QoS capabilities. It uses the Cisco modular QoS command line interface (MQC). The switch manages wireless bandwidth using unprecedented hierarchical bandwidth management starting at the per-access-point level and drilling further down to per-radio, per-service set identification (SSID), and per-user levels. This helps manage and prioritize available bandwidth between various radios and various SSIDs (enterprise, guest, and so on) within each radio on a percentage basis. The switch is also capable of automatically allocating equal bandwidth among the connected users within a given SSID. This makes sure that all users within a given SSID get a fair share of the available bandwidth while being connected to the network. The UADP ASIC enables the hierarchical bandwidth management and fair sharing of bandwidth, thereby providing hardware-based QoS for optimized performance at line-rate traffic.

In addition to these capabilities, the switch is able to do Class of Service (CoS) or Differentiated Services Code Point (DSCP) based queuing, policing, shaping, and marking of wired plus wireless traffic. This enables users to create common policies that can be used across wired plus wireless traffic. The Cisco Catalyst 3850 also supports downloadable policy names from the Cisco Identity Services Engine (ISE) when a user successfully authenticates to the network using the ISE.

Security

The Cisco Catalyst 3850 provides a rich set of security features for wired plus wireless users. Features such as IEEE 802.1x, port security, Dynamic Host Configuration Protocol (DHCP) Snooping and Guard, Dynamic ARP Inspection, RA Guard, IP Source Guard, Control Plane Protection (CoPP), Wireless Intrusion Prevention Systems (WIPSs), and so on enable protection against unauthorized users and attackers. With a variety of wired plus wireless users connecting to the network, the switch supports session-aware networking, in which each device connected to the network is identified as one session, and unique Access Control Lists (ACLs) and/or QoS policies can be defined and applied using the ISE for each of these sessions, providing better control on the devices connecting to the network.

AES-256 MACsec encryption is the IEEE 802.1AE standard for authenticating and encrypting packets between switches and endpoints. The Cisco Catalyst 3850 Series switches support 256-bit (SFP+ and Multigigabit models only) and 128-bit Advanced Encryption Standard (AES) on all ports at all speeds, providing the most secure link encryption.

Resiliency

Cisco StackWise-480 technology

Cisco StackWise-480 technology is built on the highly successful industry-leading StackWise[®] technology, which is a premium stacking architecture⁷. StackWise-480 has a stack bandwidth of 480 Gbps. StackWise - 480 uses Cisco IOS Software SSO for providing resiliency within the stack. The stack behaves as a single switching unit that is managed by an "active" switch elected by the member switches.

The active switch automatically elects a standby switch within the stack. The active switch creates and updates all the switching/routing/wireless information and constantly synchronizes that information with the standby switch. If the active switch fails, the standby switch assumes the role of the active switch and continues to keep the stack operational. Access points continue to remain connected during an active-to-standby switchover.


⁷ StackWise and StackPower technologies are not supported on the 48-port SFP+ switch model.

A working stack can accept new members or delete old ones without service interruption. StackWise-480 creates a highly resilient single unified system of up to nine switches, providing simplified management using a single IP address, single Telnet session, single CLI, autoversion checking, autoupgrading, autoconfiguration, and more. StackWise-480 also enables local switching in Cisco Catalyst 3850 Series Switches.

Cisco StackPower technology

The Cisco Catalyst 3850 Series uses the Cisco StackPower⁸ technology present on the Cisco Catalyst 3850 Series. StackPower is an innovative power interconnect system that allows the power supplies in a stack to be shared as a common resource among all the switches. Cisco StackPower unifies the individual power supplies installed in the switches and creates a pool of power, directing that power where it is needed. Up to four switches⁹ can be configured in a StackPower stack with the special connector at the back of the switch using the StackPower cable, which is different than the StackWise-480 cables. (See Figure 9.)

Figure 9. StackWise-480 and StackPower connectors

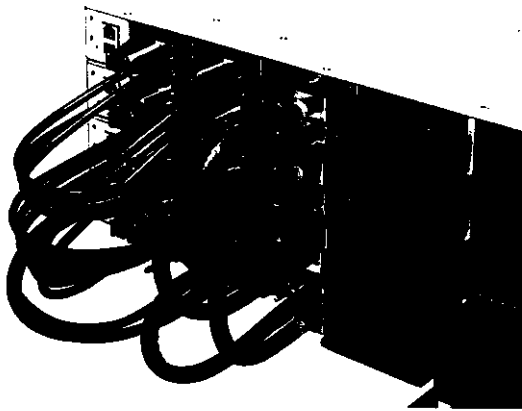

StackPower can be deployed in either power-sharing mode or redundancy mode. In power-sharing mode, the power of all the power supplies in the stack is aggregated and distributed among the switches in the stack. In redundant mode, when the total power budget of the stack is calculated, the wattage of the largest power supply is not included. That power is held in reserve and used to maintain power to switches and attached devices when one power supply fails, enabling the network to operate without interruption. Following the failure of one power supply, the StackPower mode becomes power sharing.

StackPower allows customers to simply add one extra power supply in any switch of the stack and either provide power redundancy for any of the stack members or simply add more power to the shared pool. StackPower eliminates the need for an external redundant power system or installation of dual power supplies in all the stack members. StackPower is available in LAN Base license level (or higher). For LAN Base, cables need to be purchased separately.

⁸ StackPower is not supported on the 48-port 10G SFP+ switch model.

⁹ Up to nine switches are supported in a star configuration with XPS-2200.

Foundation for Open Network Environment

The heart of the Cisco Catalyst 3850 is the UADP ASIC with programmability for future features and intelligence with investment protection. The new ASIC provides the foundation for converged APIs across wired and wireless, Cisco Open Network Environment, Software-Defined Networking (SDN) readiness, and OnePK SDK through software updates over the product lifetime.

Software features and services on Cisco Catalyst 3850 Series Switches

Software services supported on the Cisco Catalyst 3850 Series Switches can be classified into five broad categories:

- Ease of operations
- Advanced security features
- Resiliency
- Application visibility and control
- Audio Video Bridging

Ease of operations

The Cisco Catalyst 3850 helps reduce the operating costs through:

- Cisco Catalyst SmartOperations
- Easy-to-use deployment and control features
- Efficient switch operations
- Network management tools

Cisco Catalyst SmartOperations

Cisco Catalyst SmartOperations is a comprehensive set of capabilities that simplify LAN deployment, configuration, and troubleshooting. In addition to adaptive, always-on technologies such as StackWise-480 and StackPower, Cisco Catalyst SmartOperations enable zero-touch installation and replacement of switches, fast upgrade, and ease of troubleshooting with reduced operational cost. Features includes Smart Install, Auto Smartports, Smart Configuration, and Smart Troubleshooting to enhance operational excellence:

- Cisco Smart Install is a transparent plug-and-play technology to configure the Cisco IOS Software image and switch configuration without user intervention. Smart Install utilizes dynamic IP address allocation and the assistance of other switches to facilitate installation, providing transparent network plug and play.
- Cisco Auto Smartports provide automatic configuration as devices connect to the switch port, allowing autodetection and plug and play of the device onto the network.
- Cisco Smart Troubleshooting is an extensive array of debug diagnostic commands and system health checks within the switch, including Generic Online Diagnostics (GOLD) and Onboard Failure Logging (OBFL).
- Embedded Event Manager (EEM) is a powerful and flexible feature that provides real-time network event detection and onboard automation. Using EEM, customers can adapt the behavior of their network device to align with their business needs. This feature requires the IP Base feature set.

Easy-to-use deployment and control features

- User experience:
 - IP Service-Level Agreements (SLAs) enable customers to assure new business-critical IP applications, as well as IP services that utilize data, voice, and video, in an IP network. This feature requires the IP Services feature set.
 - DHCP autoconfiguration of multiple switches through a boot server eases switch deployment.
 - Automatic QoS (AutoQoS) simplifies QoS configuration in Voice over IP (VoIP) networks by issuing interface and global switch commands to detect Cisco IP phones, classify traffic, and help enable egress queue configuration.
 - Autonegotiation on all ports automatically selects half- or full-duplex transmission mode to optimize bandwidth.
 - Automatic media-dependent interface crossover (MDIX) automatically adjusts transmit and receive pairs if an incorrect cable type (crossover or straight through) is installed.
 - AV Bridging provides reliable time synchronized transmission with no pops or clicks or video dropouts.
- Simplified configuration and connectivity:
 - Dynamic Trunking Protocol (DTP) facilitates dynamic trunk configuration across all switch ports.
 - Port Aggregation Protocol (PAgP) automates the creation of Cisco Fast EtherChannel groups or Gigabit EtherChannel groups to link to another switch, router, or server.
 - Link Aggregation Control Protocol (LACP) allows the creation of Ethernet channeling with devices that conform to IEEE 802.3ad. This feature is similar to Cisco EtherChannel technology and PAgP.
 - Unidirectional Link Detection Protocol (UDLD) and aggressive UDLD allow unidirectional links caused by incorrect fiber-optic wiring or port faults to be detected and disabled on fiber-optic interfaces.
 - Cisco VLAN Trunking Protocol (VTP) Version 3 supports dynamic VLANs and dynamic trunk configuration across all switches.
 - AV Bridging provides reliable A/V streaming without the need for the installer to perform extensive hand tuning of the network.
- Efficient switch operation:
 - Switching Database Manager (SDM) templates, VLAN template (specific to LAN Base license level), and advanced template allow the administrator to automatically optimize the Ternary Content-Addressable Memory (TCAM) allocation to the desired features based on deployment-specific requirements.
 - Local proxy Address Resolution Protocol (ARP) works in conjunction with private VLAN edge to minimize broadcasts and maximize available bandwidth.
 - Stacking master configuration management with Cisco StackWise-480 technology helps make sure that all switches are automatically upgraded when the master switch receives a new software version. Automatic software version checking and updating help ensure that all stack members have the same software version.
 - Trivial File Transfer Protocol (TFTP) reduces the cost of administering software upgrades by downloading from a centralized location.
 - Network Timing Protocol (NTP) provides an accurate and consistent timestamp to all intranet switches

- **Multicast:**
 - Optimized multicast for wired plus wireless: Cisco Catalyst 3850 offers greater multicast efficiency by receiving only one multicast stream and replicating it for all connected wired plus wireless devices connected to that switch.
 - Internet Group Management Protocol (IGMP) v1, v2, v3 snooping for IPv4: Multicast Listener Discovery (MLD) v1 and v2 snooping provides fast client joins and leaves of multicast streams and limits bandwidth-intensive video traffic to only the requestors.
- **Monitoring:**
 - Remote Switch Port Analyzer (RSPAN) allows administrators to remotely monitor ports in a Layer 2 switch network from any other switch in the same network.
 - For enhanced traffic management, monitoring, and analysis, the Embedded Remote Monitoring (RMON) software agent supports four RMON groups (history, statistics, alarms, and events).
 - Layer 2 traceroute eases troubleshooting by identifying the physical path that a packet takes from source to destination.
 - Wireless RF management provides both real-time and historical information about RF interference affecting network performance across controllers using systemwide Cisco CleanAir technology integration.

Efficient switch operation

Cisco Catalyst 3850 Series Switches, designed and engineered by Cisco, provide optimum power-saving, EEE (on RJ45 ports), low-power operations for industry best-in-class power management and power consumption capabilities. The Cisco Catalyst 3850 ports are capable of reduced power modes so that ports not in use can move into a lower power utilization state. Other efficient switch operation features are:

- Cisco Discovery Protocol Version 2 allows the Cisco Catalyst 3850 Series Switches to negotiate a more granular power setting when connecting to a Cisco powered device such as IP phones or access points than what is provided by IEEE classification.
- Per-port power consumption command allows customers to specify maximum power setting on an individual port. Per-port PoE power sensing measures actual power being drawn, enabling more intelligent control of powered devices.
- The PoE MIB provides proactive visibility into power usage and allows customers to set different power-level thresholds.

Environmental responsibility

Organizations may choose to turn off access point radios to reduce power consumption during off-peak hours. The integrated wireless LAN controller avoids the deployment of additional devices in the network.

Network management tools

The Cisco Catalyst 3850 Series Switches offer both a superior CLI for detailed configuration and Cisco Prime™ infrastructure for unified wired plus wireless management. Prime infrastructure provides day 0 and ongoing provisioning, ongoing monitoring and maintenance, configuration templates, and device and user 360-degree views and serves as the FNF collector for user traffic views using the Prime Assurance Manager module.

For detailed information about Cisco Prime infrastructure, go to
<https://www.cisco.com/en/US/products/ps12239/index.html>.

Advanced Security Features

Cisco Catalyst 3850 Series Switches support advanced security features including but not limited to:

- Protection against attackers:
 - Port security secures the access to an access or trunk port based on MAC address. It limits the number of learned MAC addresses to deny MAC address flooding.
 - DHCP snooping prevents malicious users from spoofing a DHCP server and sending out bogus addresses. This feature is used by other primary security features to prevent a number of other attacks such as ARP poisoning.
 - Dynamic ARP inspection (DAI) helps ensure user integrity by preventing malicious users from exploiting the insecure nature of ARP.
 - IP source guard prevents a malicious user from spoofing (that is, taking over) another user's IP address by creating a binding table between the client's IP and MAC address, port, and VLAN, and by using it to selectively block bogus packets.
 - The Unicast Reverse Path Forwarding (uRPF) feature helps mitigate problems caused by the introduction of malformed or forged (spoofed) IP source addresses into a network by discarding IP packets that lack a verifiable IP source address.
 - Bidirectional data support on a SPAN port allows the Cisco Intrusion Detection System (IDS) to take action when an intruder is detected.
- User authentication:
 - Flexible authentication that supports multiple authentication mechanisms, including 802.1X, MAC authentication bypass, and web authentication using a single, consistent configuration.
 - RADIUS change of authorization and downloadable calls for comprehensive policy management capabilities.
 - Private VLAN edge restricts traffic between hosts in a switch by segregating traffic at Layer 2, turning a broadcast segment into a nonbroadcast multiaccess-like segment. Private VLAN edge provides security and isolation between switch ports, which helps ensure that users cannot snoop on other users' traffic.
 - Multidomain authentication allows an IP phone and a PC to authenticate on the same switch port while placing them on appropriate voice and data VLAN.
 - MAC address notification allows administrators to be notified of users added to or removed from the network.
 - Mobility and security for secure, reliable wireless connectivity and consistent end-user experience. Increased network availability through proactive blocking of known threats.
 - IGMP filtering provides multicast authentication by filtering out nonsubscribers and limits the number of concurrent multicast streams available per port.
- ACLs:
 - Cisco security VLAN ACLs on all VLANs prevent unauthorized data flows from being bridged within VLANs.
 - Cisco standard and extended IP security router ACLs define security policies on routed interfaces for control-plane and data-plane traffic. IPv6 ACLs can be applied to filter IPv6 traffic.
 - Port-based ACLs for Layer 2 interfaces allow security policies to be applied on individual switch ports.

- Device access:
 - Secure Shell (SSH) Protocol, Kerberos, and Simple Network Management Protocol Version 3 (SNMPv3) provide network security by encrypting administrator traffic during Telnet and SNMP sessions. SSH Protocol, Kerberos, and the cryptographic version of SNMPv3 require a special cryptographic software image because of U.S. export restrictions.
 - TACACS+ and RADIUS authentication facilitates centralized control of the switch and restricts unauthorized users from altering the configuration.
 - Multilevel security on console access prevents unauthorized users from altering the switch configuration.
- Bridge Protocol Data Unit (BPDU) Guard shuts down Spanning Tree PortFast-enabled interfaces when BPDUs are received to avoid accidental topology loops.
- Spanning Tree Root Guard (STRG) prevents edge devices not in the network administrator's control from becoming Spanning Tree Protocol root nodes.
- Wireless end-to-end security offers CAPWAP-compliant DTLS encryption to make sure of encryption between access points and controllers across remote WAN/LAN links.

Resiliency

Borderless networks enable enterprise mobility and business-grade video services. Industry's first unified network (wired plus wireless) location services enable tracking of mobile assets and the users of those assets for both wired plus wireless devices. The true borderless experience is enabled by the following feature sets in the Cisco Catalyst 3850 Series Switches:

- High availability
- High-performance IP routing
- Superior QoS

High availability

In addition to StackWise-480 and StackPower,¹⁰ the Cisco Catalyst 3850 Series supports high-availability features including but not limited to the following:

- Cross-Stack EtherChannel provides the ability to configure Cisco EtherChannel technology across different members of the stack for high resiliency.
- Flexlink provides link redundancy with convergence time less than 100ms.
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) provides rapid spanning-tree convergence independent of spanning-tree timers and also offers the benefit of Layer 2 load balancing and distributed processing.
- Per-VLAN Rapid Spanning Tree (PVRST+) allows rapid spanning-tree (IEEE 802.1w) reconvergence on a per-VLAN spanning-tree basis, providing simpler configuration than MSTP. In both MSTP and PVRST+ modes, stacked units behave as a single spanning-tree node.
- Switch-port autorecovery ("err-disable" recovery) automatically attempts to reactivate a link that is disabled because of a network error.

¹⁰ StackPower is not supported on the 48-port 10G SFP+ switch model.

High-performance IP routing

The Cisco Express Forwarding hardware routing architecture delivers extremely high-performance IP routing in the Cisco Catalyst 3850 Series Switches:

- IP unicast routing protocols (static, Routing Information Protocol Version 1 [RIPv1], and RIPv2, RIPv2, RIPv2, Enhanced Interior Gateway Routing Protocol [EIGRP] stub) are supported for small-network routing applications with the IP Base feature set. Limited static routing with the LAN Base feature set. Equal-cost routing facilitates Layer 3 load balancing and redundancy across the stack.
- Advanced IP unicast routing protocols (Open Shortest Path First [OSPF], EIGRP, Border Gateway Protocol Version 4 [BGPv4], and Intermediate System-to-Intermediate System Version 4 [IS-ISv4]) are supported for load balancing and constructing scalable LANs. IPv6 routing (OSPFv3, EIGRPv6) is supported in hardware for maximum performance. OSPF for routed access is included in the IP Base image. The IP Services feature set is required for full OSPF, EIGRP, BGPv4, and IS-ISv4.
- Policy-Based Routing (PBR) allows superior control by facilitating flow redirection regardless of the routing protocol configured. The IP Base feature set is required for PBR. Virtual Routing and Forwarding (VRF)-Lite enables a service provider to support two or more VPNs, with overlapping IP addresses. The IP Services feature set is required for VRF-Lite.
- Protocol-Independent Multicast (PIM) for IP multicast routing is supported, including PIM Sparse Mode (PIM-SM), PIM Dense Mode (PIM-DM), PIM sparse-dense mode, and Source-Specific Multicast (SSM). The IP Services feature set is required.
- IPv6 addressing is supported on interfaces with appropriate show commands for monitoring and troubleshooting.

Superior QoS

The Cisco Catalyst 3850 Series offers Gigabit Ethernet speed with intelligent services that keep traffic flowing smoothly, even at 10 times the normal network speed. Industry-leading mechanisms for cross-stack marking, classification, and scheduling deliver superior performance for data, voice, and video traffic, all at wire speed.

The following are some of the QoS features supported in the Cisco Catalyst 3850 Series Switches:

- Granular wireless bandwidth management and fair sharing use Cisco's proven Cisco IOS Software and UADP ASIC technology to provide hierarchical bandwidth management at line rate (per access point, per radio, per SSID, per client-based policies). Fair sharing across the users within an SSID makes sure that no single user is starved because of other heavy-hitting users. Fair sharing is automatically enabled for wireless at user level as well as SSID level.
- 802.1p CoS and DSCP field classification is provided, using marking and reclassification on a per-packet basis by source and destination IP address, MAC address, or Layer 4 Transmission Control Protocol/User Datagram Protocol (TCP/UDP) port number.
- Shaped Round Robin (SRR) scheduling helps ensure differential prioritization of packet flows by intelligently servicing the ingress queues and egress queues. Weighted Tail Drop (WTD) provides congestion avoidance at the ingress and egress queues before a disruption occurs. Strict priority queuing helps ensure that the highest priority packets are serviced ahead of all other traffic.
- The Cisco Committed Information Rate (CIR) function provides bandwidth in increments as low as 8 Kbps.

- Rate limiting is provided based on source and destination IP address, source and destination MAC address, Layer 4 TCP/UDP information, or any combination of these fields, using QoS ACLs (IP ACLs or MAC ACLs), class maps, and policy maps.
- Eight egress queues per port for wired traffic and four egress queues for wireless help enable differentiated management of different traffic types across the stack for wired traffic. Up to 2000 aggregate policers are available per switch.

Application visibility and control using Flexible NetFlow

Cisco IOS Software FNF is the next generation in flow visibility technology, allowing optimization of the network infrastructure, reducing operation costs, and improving capacity planning and security incident detection with increased flexibility and scalability. The Cisco Catalyst 3850 provides optimized application visibility with FNF across wired plus wireless. The switch is capable of up to 48,000 flow entries on 48-port models and up to 24,000 flow entries on 12-port and 24-port models across wired plus wireless. With UADP ASIC, Cisco Catalyst 3850 delivers next-generation flow technology with unprecedented flexibility and comprehensive visibility extending from Layer 2 (MAC and VLAN) to Layer 4 (TCP/UDP) flags and so on across wired plus wireless traffic. The Cisco Catalyst 3850 switch is medianet capable to provide visibility and troubleshooting capabilities across wired plus wireless video traffic. Specific medianet features will be enabled in future software updates.

The flow data collected by FNF can be exported to an external collector for analysis and reporting or tracked by the EEM. The Cisco Catalyst 3850 enables powerful on-box and customizable event correlation and policy actions with EEM, allowing the switches to trigger customized event alarms or policy actions when the predefined condition is met. With no external appliance required, customers are able to use existing infrastructure to perform traffic monitoring, making traffic analysis economical even on a large IP network.

Details about Cisco FNF are available at

https://www.cisco.com/en/US/prod/collateral/iosswrel/ps6537/ps6555/ps6601/ps6965/product_data_sheet0900aecd804b590b.html.

High-performance video over wireless integrates Cisco VideoStream technology to optimize the delivery of video applications across the WLAN.

Wired plus wireless IP telephony supports unified communications for improved collaboration through messaging, presence, and conferencing and supports all Cisco Unified Communications wireless IP phones for cost-effective, real-time voice service.

Audio video bridging

With Cisco IOS® XE Software Release 16.3, Cisco Catalyst 3850 Multigigabit and 3850 10G SFP+ now support the IEEE 802.1 AVB standard. This standard provided the means for highly reliable delivery of low-latency, time-synchronized AV streaming services through Layer 2 Ethernet networks. The standard also makes it easier to integrate new services and for AV equipment from different vendors to interoperate. Whether the AV endpoint connections are analog or are inflexible digital one to one, the network transport enables many-to-many transparent plug-and-play connections for multiple AV endpoints.

Benefits

- Improves quality of experience by lowering jitter and latency for time-synchronized delivery of high-quality AV
- Provides scalability of applications across networked deployments, including expansive and complex AV infrastructure
- Lowers Total Cost of Ownership (TCO) with reduced cabling (lowers CapEx) and no license fees (lowers OpEx)


For more details about AVB and specific models supported, check <https://www.cisco.com/go/avb>.

Deployment options**Campus**

In a campus-type deployment, operating the Cisco Catalyst 3850 in the mobility agent mode and centralizing the mobility controller functionality in a WLC 5760, WLC 5508, or WiSM2 helps achieve better scalability and performance. The Cisco Catalyst 3850 provides CAPWAP termination for access points, uniform policy enforcement for wireless clients, better wireless bandwidth, and uniform Cisco IOS Software-based configuration and monitoring for wired plus wireless features. The mobility controller provides central mobility, RRM, and CleanAir coordination.


Backward compatibility with traditional centralized wireless deployment mode on the WLC 5508, WiSM2, and WLC 5760 helps ensure that customers can migrate to the Cisco Catalyst 3850-based converged access approach in phases, providing a continued controller for existing access points. This migration also provides investment protection on the existing wireless controller infrastructure. A phased adoption of the new Cisco Catalyst 3850 helps ensure that migration to the converged access mode of wireless is seamless. Figure 10 shows a Cisco Catalyst 3850 Series Switch in a campus-type deployment.

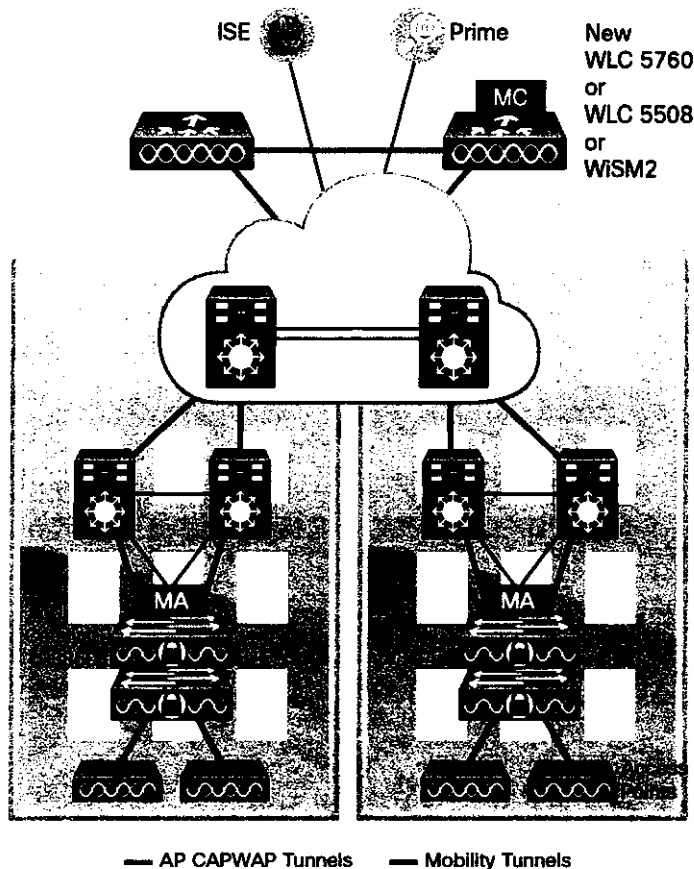

Figure 10. Mobility Controller (MC) and Mobility Agent (MA)**Branch**


The Cisco Catalyst 3850 is optimized for branch deployments when it operates in mobility controller mode. In this mode, not only can the switch terminate CAPWAP tunnels from the access points and provide client connectivity, it can also manage mobility within the branch. This eliminates the need for a local controller in every branch in addition to the access-layer switches. Also, complete visibility into the wired plus wireless traffic means that the WAN router can prioritize the right wired plus wireless traffic in and out of the branch. Figure 11 shows a Cisco Catalyst 3850 in a branch access type deployment.

Figure 11. Deploying the Cisco Catalyst 3850 Series for branch access

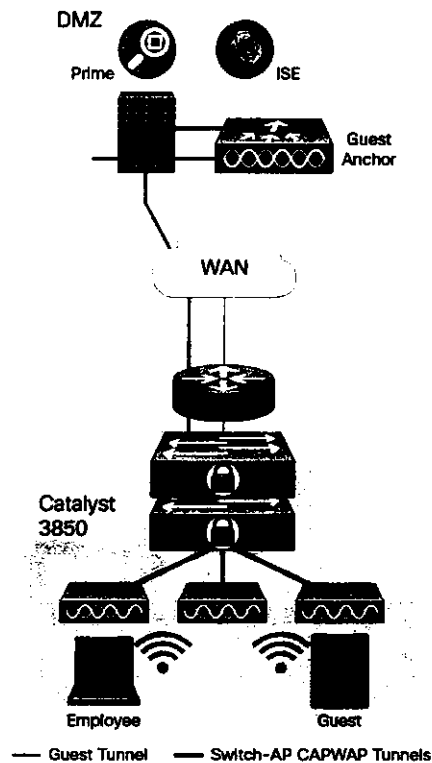


The new 12-port and 24-port SFP+ or SFP-based Cisco Catalyst 3850 models as well as the nonstackable 48-port SFP+ model can also be used in the branch to aggregate traffic from smaller access switches through fiber links for more secure and EMI-sensitive deployments (Figure 12).

Figure 12. Deploying mixed copper and fiber connections with a Cisco Catalyst 3850 stack in the branch

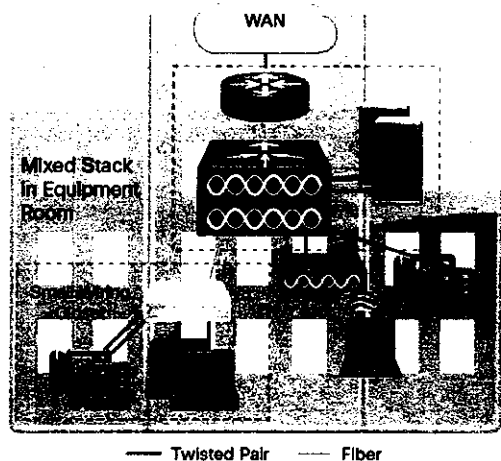

[Handwritten signature]



Cisco Catalyst 3850 Series specifications

Switch performance

Table 10 shows the Cisco Catalyst 3850 Series Switches performance specifications.

Table 10. Cisco Catalyst 3850 Series performance specifications

Performance numbers for all switch models	
Forwarding rate (pps)	92 Gbps on 24-port Gigabit Ethernet model 68 Gbps on 12-port Gigabit Ethernet model 640 Gbps on 24-port Multigigabit Ethernet model* 472 Gbps on 48-port Multigigabit Ethernet model 1280 Gbps on 48-port 10 Gigabit Ethernet SFP+ model* 640 Gbps on 24-port 10 Gigabit Ethernet SFP+ model* 320 Gbps on 12-port 10 Gigabit Ethernet SFP+ model*
Stacking bandwidth	100 Gbps
Total number of MAC addresses	92,000
Total number of IPv4 routes (ARP plus learned routes)	92,000
FNF entries	48,000 flow on 48-port Gigabit Ethernet models 24,000 flows on 12-port and 24-port Gigabit Ethernet models 96,000 flows on 48-port 10 Gigabit Ethernet SFP+ model 48,000 flows on 24-port 10 Gigabit Ethernet SFP+ model 24,000 flows on 12-port 10 Gigabit Ethernet SFP+ model
DRAM	4 GB (8 GB on 48-port SFP+ model)
Flash	2 GB (4 GB on 12-port and 24-port SFP+ models, 8 GB on 48-port SFP+ model)
VLAN IDs	4,096
Total Switched Virtual Interfaces (SVIs)	1,000
Jumbo frame	9198 bytes
Total routed ports per 3850 stack	208
Wireless	
Number of access points per switch/stack	100
Number of wireless clients per switch/stack	2000
Total number of WLANs per switch	64
Wireless bandwidth per switch	Up to 40 Gbps on 48-port Gigabit Ethernet model Up to 20 Gbps on 24-port Gigabit Ethernet model
Supported Aironet access point series	3600, 3500, 2600, 1600, 1260, 1140, 1040
Forwarding rate of switch models (with 2 x 10 Gigabit + 2 x 1 Gigabit Ethernet uplinks for 12-port and 24-port models and 4 x 10 Gigabit Ethernet uplinks for 48-port models)	
Model	Forwarding rate
WS-C3850-12S	50.5 Mpps
WS-C3850-24T	68.4 Mpps
WS-C3850-24P	
WS-C3850-24S	
WS-C3850-48P	
WS-C3850-48F	
WS-C3850-24XU	500 Mpps (80B packets)
WS-C3850-12X48U	460 Mpps (64B packets)

Performance numbers for all switch models

WS-C3850-12XS	227.28 Mpps
WS-C3850-24XS	454.55 Mpps
WS-C3850-48XS	909 Mpps

Dimensions, weight, acoustic, mean time between failures, and environmental range specifications for Cisco Catalyst 3850 Series Switches

Table 11 shows dimensions, weight, acoustic, Mean Time Between Failure (MTBF), and environmental range. Weight does not include an uplink FRU. Weight includes the chassis assembly as it is shipped (with fans), one power supply and, and one power supply slot blank.

Table 11. Dimensions, weight, acoustic, MTBF, and environmental range¹¹

Dimensions (H x W x D)	Inches	Centimeters
WS-C3850-12S	1.75 x 17.5 x 17.7	4.45 x 44.5 x 45.0
WS-C3850-24S		
WS-C3850-24T		
WS-C3850-24P		
WS-C3850-48T		
WS-C3850-48P		
WS-C3850-48F	1.75 x 17.5 x 19.2	4.45 x 44.5 x 48.8
WS-C3850-48U		
WS-C3850-24U		
WS-C3850-24XU		
WS-C3850-12X48U		
WS-C3850-12XS	1.75 x 17.5 x 17.7	4.45 X 44.5 x 45.0
WS-C3850-24XS		
WS-C3850-48XS	1.75 x 17.5 x 20.1	4.45 X 44.5 x 51.1
Weight	Pounds	Kilograms
WS-C3850-12S	15.48	7.02
WS-C3850-24S	15.5	7.03
WS-C3850-24T	15.9	7.2
WS-C3850-24P	16.3	7.4
WS-C3850-24U	16.5	7.5
WS-C3850-48T	17.0	7.7
WS-C3850-48P	17.4	7.9
WS-C3850-48F	17.6	8.0
WS-C3850-48U	17.6	8.0
WS-C3850-24XU	17.6	8.0
WS-C3850-12X48U	17.6	8.0
WS-C3850-12XS	12.9	5.8
WS-C3850-24XS	13.5	6.1
WS-C3850-48XS	16.42	7.45
C3850-NM-4-1G	0.66	0.30
C3850-NM-2-10G	0.71	0.32

¹¹ Additional information about the 48-port SFP+ model will be provided at time of shipment.

C3850-NM-4-10G	0.75	0.34
C3850-NM-8-10G	0.74	0.34
C3850-NM-2-40G	0.62	0.28

MTBF hours

WS-C3850-12S	315,840
WS-C3850-24S	300,760
WS-C3850-24T	303,230
WS-C3850-24P	269,450
WS-C3850-24U	237,310
WS-C3850-48T	303,660
WS-C3850-48P	241,050
WS-C3850-48F	241,050
WS-C3850-48U	205,110
WS-C3850-24XU	203,150
WS-C3850-12X48U	202,030
WS-C3850-12XS	371,440
WS-C3850-24XS	307,990
WS-C3850-32XS	307,990
WS-C3850-48XS	286,900
PWR-C1-350WAC	580,710
PWR-C1-715WAC	664,055
PWR-C1-1100WAC	392,174
PWR-C1-440WDC	469,350
C3850-NM-4-1G	7,052,100
C3850-NM-2-10G	4,315,970
C3850-NM-4-10G	3,835,330
C3850-NM-8-10G	6,544,410
C3850-NM-2-40G	9,303,100

Environmental ranges**With AC power supply****Operating environment and altitude****Normal operating temperature* and altitudes:**

- -5°C to +45°C, up to 5000 feet (1500m)
- -5°C to +40°C, up to 10,000 feet (3000m)

* Minimum ambient temperature for cold start is 32°F (0°C)

Short-term* exceptional conditions:

- -5°C to +50°C, up to 5000 feet (1500m)
- -5°C to +45°C, up to 10,000 feet (3000m)
- -5°C to +45°C, at sea level with single fan failure

* Not more than following in one-year period: 96 consecutive hours, or 360 hours total, or 15 occurrences.

With DC power supply**Operating environment and altitude (NEBS)****Normal operating temperature and altitudes:**

- -5°C to +45°C, up to 6000 feet (1800m)
- -5°C to +40°C, up to 10,000 feet (3000m)
- -5°C to +35°C, up to 13,000 feet (4000m)

Short-term* exceptional conditions:

- -5°C to +55°C, up to 6000 feet (1800m)
- -5°C to +50°C, up to 10,000 feet (3000m)
- -5°C to +45°C, up to 13,000 feet (4000m)
- -5°C to +45°C, at sea level with single fan failure

* Not more than following in one-year period: 96 consecutive hours, or 360 hours total, or 15 occurrences.

Relative humidity	10% to 95%, noncondensing
Acoustic noise	With AC or DC power supply (with 24 PoE+ ports loaded):
Measured per ISO 7779 and declared per ISO 9296	• LpA: 43dB typical, 45dB maximum • LwA: 5.2B typical, 5.5B maximum
Bystander positions operating to an ambient temperature of 25°C	Typical: Noise emission for a typical configuration Maximum: Statistical maximum to account for variation in production
Storage environment	Temperature: -40°C to 70°C Altitude: 15,000 ft
Vibration	Operating: 0.41Grms from 3 to 500Hz with spectral break points of 0.0005 G2/Hz at 10Hz and 200Hz 5dB/octave roll off at each end. Nonoperating: 1.12Grms from 3 to 500Hz with spectral break points of 0.0065 G2/Hz at 10Hz and 100Hz 5dB/octave roll off at each end.
Shock	Operating: 30G, 2ms half sine Nonoperating: 55G, 10ms trapezoid

Connectors for Cisco Catalyst 3850 Series

Table 12 shows the supported connectors.

Table 12. Connectors

Connectors and cabling	• 1000BASE-T ports: RJ-45 connectors, 4-pair Cat-5E UTP cabling • Multigig-T ports: RJ-45 connectors, 4-pair Cat-5E, Cat-6, Cat6A UTP cabling • 1000BASE-T SFP-based ports: RJ-45 connectors, 4-pair Cat-5E UTP cabling • 100BASE-FX, 1000BASE-SX, -LX/LH, -ZX, -BX10, DWDM and CWDM SFP transceivers: LC fiber connectors (single-mode or multimode fiber) • 10GBASE-SR, LR, LRM, ER, ZR, DWDM SFP+ transceivers: LC fiber connectors (single-mode or multimode fiber) • CX1 cable assemblies: SFP+ connector • Cisco StackWise-480 stacking ports: copper-based Cisco StackWise cabling • Cisco StackPower: Cisco proprietary power stacking cables • Ethernet management port: RJ-45 connectors, 4-pair Cat-5 UTP cabling • Management console port: RJ-45-to-DB9 cable for PC connections
Power connectors	• Customers can provide power to a switch by using either the internal power or StackPower from another member in the power stack. The connectors are located at the back of the switch. • Internal power supply connector: The internal power supply is an autoranging unit. The internal power supply supports input voltages between 100 and 240VAC. Use the supplied AC power cord to connect the AC power connector to an AC power outlet.

For the latest Cisco transceiver module compatibility information, refer to

<https://www.cisco.com/c/en/us/support/interfaces-modules/transceiver-modules/products-device-support-tables-list.html>.

Management and standards support for Cisco Catalyst 3850 Series Switches

Table 13 shows management and standards support for the Cisco Catalyst 3850 Series.

Table 13. Management and standards support for the Cisco Catalyst 3850 Series

Description	Specification
Management	BRIDGE-MIB CISCO-AUTH-FRAMEWORK-MIB CISCO-BGP4-MIB, BGP4-MIB CISCO-BRIDGE-EXT-MIB CISCO-BULK-FILE-MIB CISCO-CABLE-DIAG-MIB CISCO-CALLHOME-MIB CISCO-SNMP-TARGET-EXT-MIB CISCO-STACKMAKER-MIB CISCO-MEMORY-POOL-MIB CISCO-STP-EXTENSIONS-MIB CISCO-SYSLOG-MIB CISCO-TCP-MIB CISCO-UDLD-MIB

Description	Specification
	CISCO-CEF-MIB
	CISCO-CIRCUIT-INTERFACE-MIB
	CISCO-ENTITY-VENDORTYPE-OID-MIB
	CISCO-CONTEXT-MAPPING-MIB
	CISCO-DEVICE-LOCATION-MIB
	CISCO-DHCP-SNOOPING-MIB
	CISCO-EIGRP-MIB
	CISCO-EMBEDDED-EVENT-MGR-MIB
	CISCO-ENTITY-FRU-CONTROL-MIB
	CISCO-ENTITY-SENSOR-MIB
	ENTITY-MIB
	CISCO-ERR-DISABLE-MIB
	CISCO-CONFIG-COPY-MIB
	CISCO-FLOW-MONITOR-MIB
	CISCO-FTP-CLIENT-MIB
	CISCO-HSRP-EXT-MIB
	CISCO-HSRP-MIB
	CISCO-IETF-ISIS-MIB
	CISCO-IF-EXTENSION-MIB
	CISCO-IGMP-FILTER-MIB
	CISCO-CONFIG-MAN-MIB
	CISCO-IP-CBR-METRICS-MIB
	CISCO-IPMRROUTE-MIB
	CISCO-IP-STAT-MIB
	CISCO-IP-URPF-MIB
	CISCO-L2L3-INTERFACE-CONFIG-MIB
	CISCO-LAG-MIB
	CISCO-LICENSE-MGMT-MIB
	CISCO-MAC-AUTH-BYPASS-MIB
	CISCO-MAC-NOTIFICATION-MIB
	CISCO-MDI-METRICS-MIB
	CISCO-FLASH-MIB
	CISCO-OSPF-MIB
	CISCO-OSPF-TRAP-MIB
	CISCO-PAE-MIB
	CISCO-PAGP-MIB
	CISCO-PIM-MIB
	CISCO-PING-MIB
	CISCO-PORT-QOS-MIB
	CISCO-PORT-SECURITY-MIB
	CISCO-PORT-STORM-CONTROL-MIB
	CISCO-POWER-ETHERNET-EXT-MIB
	CISCO-PRIVATE-VLAN-MIB
	CISCO-PROCESS-MIB
	CISCO-PRODUCTS-MIB
	CISCO-RF-MIB
	CISCO-RTP-METRICS-MIB
	CISCO-RTTMON-MIB
	CISCO-SMART-INSTALL-MIB
	CISCO-VLAN-IPTABLE-RELATIONSHIP-MIB
	CISCO-VLAN-MEMBERSHIP-MIB
	CISCO-VTP-MIB
	EtherLike-MIB
	HC-RMON-MIB
	IEEE8021-PAE-MIB
	IEEE8023-LAG-MIB
	IF-MIB
	IGMP-MIB
	IGMP-STD-MIB
	IP-FORWARD-MIB
	IP-MIB
	IPMRROUTE-STD-MIB
	LLDP-EXT-MED-MIB
	LLDP-MIB
	NOTIFICATION-LOG-MIB
	OLD-CISCO-MEMORY-MIB
	CISCO-CDP-MIB
	POWER-ETHERNET-MIB
	RMON2-MIB
	RMON-MIB
	SNMP-COMMUNITY-MIB
	SNMP-FRAMEWORK-MIB
	SNMP-MPD-MIB
	SNMP-NOTIFICATION-MIB
	SNMP-PROXY-MIB
	SNMP-TARGET-MIB
	SNMP-USM-MIB
	SNMPV2-MIB
	SNMP-VIEW-BASED-ACM-MIB
	TCP-MIB
	UDP-MIB
	CISCO-IMAGE-MIB
	CISCO-STACKWISE-MIB
	AIRESPMACE-WIRELESS-MIB
	CISCO-LWAPP-IDS-MIB
	CISCO-LWAPP-AP-MIB
	CISCO-LWAPP-CCX-RM-MIB
	CISCO-LWAPP-CLIENT-ROAMING-MIB
	CISCO-LWAPP-DOT11-CCX-CLIENT-DIAG-MIB
	CISCO-LWAPP-DOT11-CCX-CLIENT-MIB
	CISCO-LWAPP-DOT11-CLIENT-CCX-REPORTS-MIB
	CISCO-LWAPP-DOT11-CLIENT-MIB
	CISCO-LWAPP-DOT11-MIB
	CISCO-LWAPP-DOWNLOAD-MIB
	CISCO-LWAPP-LINKTEST-MIB
	CISCO-LWAPP-MFP-MIB
	CISCO-LWAPP-MOBILITY-EXT-MIB
	CISCO-LWAPP-QOS-MIB
	CISCO-LWAPP-REAP-MIB
	CISCO-LWAPP-ROGUE-MIB
	CISCO-LWAPP-RRM-MIB
	CISCO-LWAPP-SI-MIB
	CISCO-LWAPP-TSM-MIB
	CISCO-LWAPP-WLAN-MIB
	CISCO-LWAPP-WLAN-SECURITY-MIB

Description	Specification
1. General Information	1.1. Project Name: [Redacted]
	1.2. Version: [Redacted]
	1.3. Author: [Redacted]
	1.4. License: [Redacted]
	1.5. Dependencies: [Redacted]
	1.6. Installation: [Redacted]
	1.7. Usage: [Redacted]
	1.8. Configuration: [Redacted]
	1.9. Testing: [Redacted]
	1.10. Deployment: [Redacted]
	1.11. Documentation: [Redacted]
	1.12. Support: [Redacted]
	1.13. Contributing: [Redacted]
	1.14. Changelog: [Redacted]
	1.15. Footer: [Redacted]
	1.16. Footer: [Redacted]
	1.17. Footer: [Redacted]
	1.18. Footer: [Redacted]
	1.19. Footer: [Redacted]
	1.20. Footer: [Redacted]
	1.21. Footer: [Redacted]
	1.22. Footer: [Redacted]
	1.23. Footer: [Redacted]
	1.24. Footer: [Redacted]
	1.25. Footer: [Redacted]
	1.26. Footer: [Redacted]
	1.27. Footer: [Redacted]
	1.28. Footer: [Redacted]
	1.29. Footer: [Redacted]
	1.30. Footer: [Redacted]
	1.31. Footer: [Redacted]
	1.32. Footer: [Redacted]
	1.33. Footer: [Redacted]
	1.34. Footer: [Redacted]
	1.35. Footer: [Redacted]
	1.36. Footer: [Redacted]
	1.37. Footer: [Redacted]
	1.38. Footer: [Redacted]
	1.39. Footer: [Redacted]
	1.40. Footer: [Redacted]
	1.41. Footer: [Redacted]
	1.42. Footer: [Redacted]
	1.43. Footer: [Redacted]
	1.44. Footer: [Redacted]
	1.45. Footer: [Redacted]
	1.46. Footer: [Redacted]
	1.47. Footer: [Redacted]
	1.48. Footer: [Redacted]
	1.49. Footer: [Redacted]
	1.50. Footer: [Redacted]
	1.51. Footer: [Redacted]
	1.52. Footer: [Redacted]
	1.53. Footer: [Redacted]
	1.54. Footer: [Redacted]
	1.55. Footer: [Redacted]
	1.56. Footer: [Redacted]
	1.57. Footer: [Redacted]
	1.58. Footer: [Redacted]
	1.59. Footer: [Redacted]
	1.60. Footer: [Redacted]
	1.61. Footer: [Redacted]
	1.62. Footer: [Redacted]
	1.63. Footer: [Redacted]
	1.64. Footer: [Redacted]
	1.65. Footer: [Redacted]
	1.66. Footer: [Redacted]
	1.67. Footer: [Redacted]
	1.68. Footer: [Redacted]
	1.69. Footer: [Redacted]
	1.70. Footer: [Redacted]
	1.71. Footer: [Redacted]
	1.72. Footer: [Redacted]
	1.73. Footer: [Redacted]
	1.74. Footer: [Redacted]
	1.75. Footer: [Redacted]
	1.76. Footer: [Redacted]
	1.77. Footer: [Redacted]
	1.78. Footer: [Redacted]
	1.79. Footer: [Redacted]
	1.80. Footer: [Redacted]
	1.81. Footer: [Redacted]
	1.82. Footer: [Redacted]
	1.83. Footer: [Redacted]
	1.84. Footer: [Redacted]
	1.85. Footer: [Redacted]
	1.86. Footer: [Redacted]
	1.87. Footer: [Redacted]
	1.88. Footer: [Redacted]
	1.89. Footer: [Redacted]
	1.90. Footer: [Redacted]
	1.91. Footer: [Redacted]
	1.92. Footer: [Redacted]
	1.93. Footer: [Redacted]
	1.94. Footer: [Redacted]
	1.95. Footer: [Redacted]
	1.96. Footer: [Redacted]
	1.97. Footer: [Redacted]
	1.98. Footer: [Redacted]
	1.99. Footer: [Redacted]
	1.100. Footer: [Redacted]

Power supply specifications

Table 14 lists the power specifications for the Cisco Catalyst 3850 Series based on the kind of power supply used.

Table 14. Power specifications for Cisco Catalyst 3850 Series

Description	PWR-C1-1100WAC	PWR-C1-715WAC	PWR-C1-350WAC	PWR-C1-440WDC
Power supply rated maximum	1100W	715W	350W	440W
Total output BTU (Note: 1000 BTU/hr = 293W)	3793 BTU/hr, 1100W	2465 BTU/hr, 715W	1207BTU/hr, 350W	1517BTU/hr, 440W
Input-voltage range and frequency	115-240VAC, 50-60 Hz	100-240VAC, 50-60 Hz	100-240VAC, 50-60 Hz	-36VDC to -72VDC
Input current	12-6A	10-5A	4-2A	<8A at -72VDC <16A at -36VDC
Output ratings	-56V at 19.64A	-56V at 12.8A	-56V at 6.25A	-56V at 7.86A
Output holdup time	10 ms minimum at 102.5VAC	16.7 ms minimum at 100VAC	16.7 ms minimum at 100VAC	> 2ms at -48VDC
Power-supply input receptacles	IEC 320-C16 (IEC60320-C16)	IEC 320-C16 (IEC60320-C16)	IEC 320-C16 (IEC60320-C16)	Terminal strip
Power cord rating	13A	13A	10A	20A at 100VDC
Physical specifications	(H x W x D): 1.58 X 3.25 X 13.7 in Weight: 3 lb (1.4 kg)	(H x W x D): 1.58 X 3.25 X 12.20 in Weight: 2.8 lb (1.3 kg)	(H x W x D): 1.58 X 3.25 X 12.20 in Weight: 2.6 lb (1.2 kg)	(H x W x D): 1.58 X 3.25 X 12.20 in Weight: 2.6 lb (1.2 kg)
Operating temperature	23 to 113°F (-5 to 45°C)			
Storage temperature	-40 to 158°F (-40 to 70°C)			
Relative humidity operating and nonoperating noncondensing	5 to 90% noncondensing			
Altitude	10,000 ft. (3000 meters), up to 45°C			
MTBF	Calculated MTBF must be greater than 300,000 using Telcordia SR-332, Method 1, Case 3. Demonstrated MTBF is 500,000 hr (with 90% confidence level).			

Description	Specification			
	PWR-C1-1100WAC	PWR-C1-715WAC	PWR-C1-350WAC	PWR-C1-440WDC
EMI and EMC compliance	FCC Part 15 (CFR 47) Class A ICES-003 Class A EN 55022 Class A CISPR 22 Class A AS/NZS 3548 Class A BSMI Class A (AC input models only) VCCI Class A EN 55024, EN300386, EN 50082-1, EN 61000-3-2, EN 61000-3-3 EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN 61000-6-1			
Safety compliance	UL 60950-1, CAN/CSA-C22.2 No. 60950-1, EN 60950-1, IEC 60950-1, CCC, CE Marking			
LED Indicators	"AC OK": Input power to the power supply is OK "PS OK": Output power from the power supply is OK			

Power consumption of standalone Cisco Catalyst 3850 Series Switches

Table 15 shows power consumption of standalone Cisco Catalyst 3850 Series Switches based on Alliance for Telecommunications Industry Solutions (ATIS) testing using IMIX distribution stream traffic, with input voltage of 115VAC at 60 Hz and no PoE loading. The values given are the maximum possible power consumption numbers under the respective test scenarios.

Table 15. Power consumptions (in watts) of standalone Cisco Catalyst 3850 Series

Model	Uplink module	Power consumption (W) (no more than)			
		0% traffic	10% traffic	100% traffic	Weighted average
WS-C3850-12S	C3850-NM-4-1G	85.84	85.89	86.75	86.0
WS-C3850-24S		104.48	104.25	105.12	104.4
WS-C3850-12S	C3850-NM-2-10G	87.95	88.30	90.04	88.4
WS-C3850-24S		106.24	106.58	109.75	106.9
WS-C3850-24T	C3850-NM-4-1G	83.47	82.86	83.76	83.04
WS-C3850-24P		86.81	86.22	87.11	86.40
WS-C3850-24U		81.5	81.4	82.1	81.5
WS-C3850-48P		125.35	124.15	125.15	124.43
WS-C3850-48F		130.10	128.91	129.85	129.18
WS-C3850-48U		114.8	114.7	115.6	114.8
WS-C3850-24T	C3850-NM-2-10G	81.97	81.83	84.97	82.16
WS-C3850-24P		85.22	85.04	88.32	85.39
WS-C3850-24U		82.8	82.6	84.8	82.9
WS-C3850-48T		117.56	116.74	120.40	117.23
WS-C3850-48P		123.78	122.90	126.75	123.42
WS-C3850-48F		129.89	129.06	132.36	129.18
WS-C3850-48U		116.8	116.9	119.9	117.2
WS-C3850-48T	C3850-NM-4-10G	120.56	120.28	127.24	121.02
WS-C3850-48P		129.59	129.64	135.96	130.27
WS-C3850-48F		137.57	137.06	143.77	137.81
WS-C3850-48U		119.9	121.2	127.7	121.5
WS-C3850-12XS		109.0	109.5	112.7	109.7

Model	Uplink module	Power consumption (W) (no more than)			
		0% traffic	10% traffic	100% traffic	Weighted average
WS-C3850-24XU	C3850-NM-8-10G	229.7	231.2	248.1	232.7
WS-C3850-12X48U		191.3	193.6	208.1	194.8
WS-C3850-24XS		183.6	185.3	205.5	187.2
WS-C3850-24XS	C3850-NM-2-40G	159.2	161.1	177.0	162.5
WS-C3850-48XS	None	267.0	268.3	288.1	270.1

Safety and compliance

Table 16. Safety and compliance information for the Cisco Catalyst 3850 Series

Description	Specification
Safety certifications	UL 60950-1 Second Edition CAN/CSA-C22.2 No. 60950-1 Second Edition EN 60950-1 Second Edition IEC 60950-1 Second Edition NOM (obtained by partners and distributors)
Electromagnetic emissions certifications	47CFR Part 15 (CFR 47) Class A (FCC Part 15 Class A) AS/NZS CISPR22 Class A CISPR22 Class A EN55022 Class A ICES003 Class A VCCI Class A EN61000-3-2 EN61000-3-3 KN22 Class A KCC CNS13438 Class A EN55024 CISPR24 KN24
Environmental	Reduction of Hazardous Substances (ROHS) 5
Noise specifications	Office Product Spec: 48dBA at 30°C (refer to ISO 7779)
Telco	CLEI code

Cisco enhanced limited lifetime hardware warranty (E-LLW)

The Cisco Catalyst 3850 Series Switches come with an E-LLW that includes NBD delivery of replacement hardware where available and 90 days of 8x5 Cisco TAC support.

Your formal warranty statement, including the warranty applicable to Cisco software, appears in the Cisco information packet that accompanies your Cisco product. We encourage you to review carefully the warranty statement shipped with your specific product before use.

Cisco reserves the right to refund the purchase price as its exclusive warranty remedy.

For further information about warranty terms, visit <https://www.cisco.com/go/warranty>. Table 17 provides information about the E-LLW.

Table 17. E-LLW details

Cisco E-LLW	
Device covered	Applies to Cisco Catalyst 3850 Series Switches.
Warranty duration	As long as the original customer owns the product.
EoL policy	In the event of discontinuance of product manufacture, Cisco warranty support is limited to 5 years from the announcement of discontinuance.
Hardware replacement	Cisco or its service center will use commercially reasonable efforts to ship a replacement for NBD delivery, where available. Otherwise, a replacement will be shipped within 10 working days after receipt of the RMA request. Actual delivery times might vary depending on customer location.
Effective date	Hardware warranty commences from the date of shipment to customer (and in case of resale by a Cisco reseller, not more than 90 days after original shipment by Cisco).
TAC support	Cisco will provide during business hours, 8 hours per day, 5 days per week basic configuration, diagnosis, and troubleshooting of device-level problems for up to a 90-day period from the date of shipment of the originally purchased Cisco Catalyst 3850 product. This support does not include solution or network-level support beyond the specific device under consideration.
Cisco.com access	Warranty allows guest access only to Cisco.com.

Licensing for Cisco Catalyst 3850 Series Switches

The three feature sets available with all Cisco Catalyst 3850 Series Switches are:

- LAN Base: Enterprise access Layer 2 switching features
- IP Base: Enterprise access Layer 3 switching features
- IP Services: Advanced enterprise Layer 3 switching (IPv4 and IPv6) features

The LAN Base feature set offers enhanced intelligent services that include comprehensive Layer 2 features, with up to 255 VLANs. The IP Base feature set provides entry-level enterprise services in addition to all LAN Base features, with 1K VLANs. IP Base also includes the support for wireless controller functionality (mobility agent and mobility controller role; additional access point license required for mobility controller role), routed access, smart operations, FNF, and so on. The IP Services feature set provides full enterprise services that include advanced Layer 3 features such as EIGRP, OSPF, BGP, PIM, and IPv6 routing such as OSPFv3 and EIGRPv6. All software feature sets support advanced security and MQC-based QoS.

The Cisco Catalyst 3850 Series Switches with LAN Base feature set can only stack with other Cisco Catalyst 3850 Series LAN Base switches. The same applies to IP Base and IP Services as well. A mixed stack of LAN Base switch with IP Base or IP Services feature set is not supported.

The 12-port and 24-port SFP+ and SFP-based models as well as the 48-port SFP+ model can only be ordered with IP Base or IP Services licenses. Therefore, in order to stack with LAN Base models, they need to be configured in LAN Base mode from the CLI.

Customers can transparently upgrade the software feature set in the Cisco Catalyst 3850 Series Switches through Cisco IOS Software CLI using the Right To Use (RTU)-based software upgrade process. Software activation enables the Cisco IOS Software feature sets. Based on the license's type, Cisco IOS Software activates the appropriate feature set. License types can be changed, or upgraded, to activate a different feature set.

Access point license for Cisco Catalyst 3850 Series

An access point license is required for Cisco Catalyst 3850 Series Switches operating in mobility controller mode. No access point license is required for 3850 operating in mobility agent mode. This functionality is included in the IP Base feature set. Other devices that can act as mobility controller are the WLC 5760, WLC 5508, and WISM2 wireless controllers. Access point licenses can be transferred only between two 3850 switches or between 3850 and 5760 controller and vice versa.

Software policy for Cisco Catalyst 3850 Series Switches

Customers with Cisco Catalyst LAN Base and IP Base software feature sets will be provided with maintenance updates and bug fixes designed to maintain the compliance of the software with published specifications, release notes, and industry standards compliance as long as the original end user continues to own or use the product or up to one year from the end-of-sale date for this product, whichever occurs earlier. Customers with licenses for our IP Services software images require a service support contract such as Cisco Smart Net Total Care™ Service to download updates. This policy supersedes any previous warranty or software statement and is subject to change without notice.

Cisco ONE Software

Cisco ONE Software for Access Switching is available for the Cisco Catalyst 3850 Series Switches.

Cisco ONE Software is a new way for customers to purchase and use our infrastructure software. It offers a simplified consumption model, centered on common customer scenarios in the data center, WANs, and LANs.

Cisco ONE Software and services provide customers with four primary benefits:

- Software suites that address typical customer use scenarios at an attractive price
- Investment protection of their software purchase through software services-enabled license portability
- Access to ongoing innovation and new technology with Cisco Software Support Service (SWSS)
- Flexible licensing models to smoothly distribute customer's software spend over time

For ordering information for Cisco ONE Software for the Cisco Catalyst 3850 Series Switches, go to <https://www.cisco.com/c/en/us/products/software/one-access/switching-part-numbers.html>.

Cisco and partner services for next-generation Cisco Catalyst fixed switches

Enable the innovative, secure, intelligent edge in the Borderless Network Architecture using personalized services from Cisco and our partners. Through a discovery process that begins with understanding your business objectives, we help you integrate the next-generation Cisco Catalyst fixed switches into your architecture and incorporate network services onto that platform. Sharing knowledge and leading practices, we support your success every step of the way as you deploy, absorb, manage, and scale new technology.

Choose from a flexible suite of support services designed to meet your business needs and help you maintain high-quality network performance while controlling operational costs. (See Table 18.)

Table 18. Technical services available for Cisco Catalyst 3850 Series Switches

Technical services
• Around-the-clock, global access to the Cisco TAC • Unrestricted access to the extensive Cisco.com knowledge base and tools • NBD, 8x5x4, 24x7x4, and 24x7x2 advance hardware replacement and onsite parts replacement and installation available • Ongoing operating system software updates within the licensed feature set • Proactive diagnostics and real-time alerts on Smart Call Home-enabled devices
Cisco Smart Foundation Service • NBD advance hardware replacement as available • Business hours access to SMB TAC (access levels vary by region) • Access to Cisco.com SMB knowledge base • Online technical resources through Smart Foundation Portal • Operating system software bug fixes and patches
Cisco SP Base Service • Around-the-clock, global access to the Cisco TAC • Registered access to Cisco.com • NBD, 8x5x4, 24x7x4, and 24x7x2 advance hardware replacement; return to factory option available² • Ongoing operating system software updates¹
Cisco Focused Technical Support Services • Three levels of premium, high-touch services are available: ◦ Cisco High-Touch Operations Management Service ◦ Cisco High-Touch Technical Support Service ◦ Cisco High-Touch Engineering Service • Valid Cisco Smart Net Total Care or SP Base contracts on all network equipment are required

Notes

¹ Cisco operating system updates include the following: maintenance releases, minor updates, and major updates within the licensed feature set.

² Advance hardware replacement is available in various service-level combinations. For example, 8x5xNBD indicates that shipment will be initiated during the standard 8-hour business day, 5 days a week (the generally accepted business days within the relevant region), with NBD delivery. Where NBD is not available, same day ship is provided. Restrictions apply; for details, review the appropriate service descriptions.

Ordering information

Table 19 lists ordering information for the Cisco Catalyst 3850 Series. To place an order, visit the Cisco Ordering homepage at https://www.cisco.com/en/US/ordering/or13/or8/order_customer_help_how_to_order_listing.html.

Table 19. Cisco Catalyst 3850 Series ordering information

Product number	Description
Cisco Catalyst 3850 Series	
WS-C3850-24T-L	Stackable 24 10/100/1000 Ethernet ports, with 350WAC power supply 1 RU, LAN Base feature set (StackPower cables need to be purchased separately)
WS-C3850-48T-L	Stackable 48 10/100/1000 Ethernet ports, with 350WAC power supply 1 RU, LAN Base feature set (StackPower cables need to be purchased separately)
WS-C3850-24P-L	Stackable 24 10/100/1000 Ethernet PoE+ ports, with 715WAC power supply 1 RU, LAN Base feature set (StackPower cables need to be purchased separately)
WS-C3850-24U-L	Stackable 24 10/100/1000 Ethernet UPOE ports, with 1100WAC power supply 1 RU, LAN Base feature set (StackPower cables need to be purchased separately)
WS-C3850-48P-L	Stackable 48 10/100/1000 Ethernet PoE+ ports, with 715WAC power supply 1 RU, LAN Base feature set (StackPower cables need to be purchased separately)

Product number	Description
WS-C3850-48F-L	Stackable 48 10/100/1000 Ethernet PoE+ ports, with 1100WAC power supply 1 RU, LAN Base feature set (StackPower cables need to be purchased separately)
WS-C3850-48U-L	Stackable 48 10/100/1000 Ethernet UPOE ports, with 1100WAC power supply 1 RU, LAN Base feature set (StackPower cables need to be purchased separately)
WS-C3850-24T-S	Stackable 24 10/100/1000 Ethernet ports, with 350WAC power supply 1 RU, IP Base feature set
WS-C3850-48T-S	Stackable 48 10/100/1000 Ethernet ports, with 350WAC power supply 1 RU, IP Base feature set
WS-C3850-24P-S	Stackable 24 10/100/1000 Ethernet PoE+ ports, with 715WAC power supply 1 RU, IP Base feature set
WS-C3850-24U-S	Stackable 24 10/100/1000 Ethernet UPOE ports, with 1100WAC power supply 1 RU, IP Base feature set
WS-C3850-48P-S	Stackable 48 10/100/1000 Ethernet PoE+ ports, with 715WAC power supply 1 RU, IP Base feature set
WS-C3850-48F-S	Stackable 48 10/100/1000 Ethernet PoE+ ports, with 1100WAC power supply 1 RU, IP Base feature set
WS-C3850-48U-S	Stackable 48 10/100/1000 Ethernet UPOE ports, with 1100WAC power supply 1 RU, IP Base feature set
WS-C3850-24T-E	Stackable 24 10/100/1000 Ethernet ports, with 350WAC power supply 1 RU, IP Services feature set
WS-C3850-24P-E	
WS-C3850-24P-E	Stackable 24 10/100/1000 Ethernet PoE+ ports, with 715WAC power supply 1 RU, IP Services feature set
WS-C3850-24U-E	Stackable 24 10/100/1000 Ethernet UPOE ports, with 1100WAC power supply 1 RU, IP Services feature set
WS-C3850-48P-E	Stackable 48 10/100/1000 Ethernet PoE+ ports, with 715WAC power supply 1 RU, IP Services feature set
WS-C3850-48F-E	Stackable 48 10/100/1000 Ethernet PoE+ ports, with 1100WAC power supply 1 RU, IP Services feature set
WS-C3850-48U-E	Stackable 48 10/100/1000 Ethernet UPOE ports, with 1100WAC power supply 1 RU, IP Services feature set
WS-C3850-12X48U-L	Stackable 48 10/100/1000 with 12 100Mbps/1/2.5/5/10 Gbps UPOE Ethernet ports, with 1100W AC power supply 1RU, LAN Base feature set
WS-C3850-12X48U-S	Stackable 48 10/100/1000 with 12 100Mbps/1/2.5/5/10 Gbps UPOE Ethernet ports, with 1100W AC power supply 1RU, IP Base feature set
WS-C3850-12X48U-E	Stackable 48 10/100/1000 with 12 100Mbps/1/2.5/5/10 Gbps UPOE Ethernet ports, with 1100W AC power supply 1RU, IP Services feature set
WS-C3850-24XU-L	Stackable 24 100Mbps/1/2.5/5/10 Gbps UPOE Ethernet ports, with 1100W AC power supply 1RU, LAN Base feature set
WS-C3850-24XU-S	Stackable 24 100Mbps/1/2.5/5/10 Gbps UPOE Ethernet ports, with 1100W AC power supply 1RU, IP Base feature set
WS-C3850-24XU-E	Stackable 24 100Mbps/1/2.5/5/10 Gbps UPOE Ethernet ports, with 1100W AC power supply 1RU, IP Services feature set
WS-C3850-12S-S	Stackable 12 SFP Ethernet ports, with 350WAC power supply 1 RU, IP Base feature set
WS-C3850-12S-E	Stackable 12 SFP Ethernet ports, with 350WAC power supply 1 RU, IP Services feature set

Product number	Description
WS-C3850-24S-S	Stackable 24 SFP Ethernet ports, with 350WAC power supply 1 RU, IP Base feature set
WS-C3850-24S-E	Stackable 24 SFP Ethernet ports, with 350WAC power supply 1 RU, IP Services feature set
WS-C3850-12XS-S	Stackable 12 SFP+ Ethernet ports, with 350WAC power supply 1 RU, IP Base feature set
WS-C3850-12XS-E	Stackable 12 SFP+ Ethernet ports, with 350WAC power supply 1 RU, IP Services feature set
WS-C3850-24XS-S	Stackable 24 SFP+ Ethernet ports, with 715WAC power supply 1 RU, IP Base feature set
WS-C3850-24XS-E	Stackable 24 SFP+ Ethernet ports, with 715WAC power supply 1 RU, IP Services feature set
WS-C3850-48XS-S	Standalone, 48 SFP+ and 4 QSFP+ Ethernet ports, with 750WAC front-to-back power supply 1 RU, IP Base feature set
WS-C3850-48XS-E	Standalone, 48 SFP+ and 4 QSFP+ Ethernet ports, with 750WAC front-to-back power supply 1 RU, IP Services feature set
WS-C3850-48XS-F-S	Standalone, 48 SFP+ and 4 QSFP+ Ethernet ports, with 750WAC back-to-front power supply 1 RU, IP Base feature set
WS-C3850-48XS-F-E	Standalone, 48 SFP+ and 4 QSFP+ Ethernet ports, with 750WAC back-to-front power supply 1 RU, IP Services feature set
Cisco Catalyst 3850 bundles	
WS-C3850-24PW-S	Cisco Catalyst 3850 24-port PoE IP Base with 5 access point license
WS-C3850-48PW-S	Cisco Catalyst 3850 48-port PoE IP Base with 5 access point license
WS-C3850-24UW-S	Cisco Catalyst 3850 24 Port UPOE with 5 access point licenses IP Base
WS-C3850-48W-S	Cisco Catalyst 3850 48 Port PoE with 5 access point licenses IP Base
WS-C3850-48UW-S	Cisco Catalyst 3850 48 Port UPOE with 5 access point licenses IP Base
WS-C3850-24XUW-S	Cisco Catalyst 3850 24 Port UPOE with 24 100Mbps/1/2.5/5/10 Gbps and 5 access point licenses IP Base
WS-C3850-12X48UW-S	Cisco Catalyst 3850 48 Port UPOE with 12 100Mbps/1/2.5/5/10 Gbps and 5 access point licenses IP Base
WS-C3850-16XS-S	Cisco Catalyst 3850 12 SFP+ port stackable model, with C3850-NM-4-10G module and 350WAC power supply. 1 RU, IP Base feature set
WS-C3850-16XS-E	Cisco Catalyst 3850 12 SFP+ port stackable model, with C3850-NM-4-10G module and 350WAC power supply. 1 RU, IP Services feature set
WS-C3850-32XS-S	Cisco Catalyst 3850 24 SFP+ port stackable model, with C3850-NM-8-10G module and 715WAC power supply. 1 RU, IP Base feature set
WS-C3850-32XS-E	Cisco Catalyst 3850 24 SFP+ port stackable model, with C3850-NM-8-10G module and 715WAC power supply. 1 RU, IP Services feature set
Network modules for the Cisco Catalyst 3850 Series	
C3850-NM-4-1G=	4 x Gigabit Ethernet network module spare
C3850-NM-2-10G=	4 x Gigabit Ethernet/2 x 10 Gigabit Ethernet network module spare
C3850-NM-BLANK=	Network module blank spare
C3850-NM-8-10G=	8 x Gigabit Ethernet/8 x 10 Gigabit Ethernet network module spare
C3850-NM-2-40G=	2 x 40 Gigabit Ethernet network module spare
Software licenses	
C3850-12-S-E	Cisco Catalyst 3850 12-port IP Base to IP Services RTU paper license
C3850-24-L-S	Cisco Catalyst 3850 24-port Switch LAN Base to IP Base RTU paper license
C3850-48-L-S	Cisco Catalyst 3850 48-port Switch LAN Base to IP Base RTU paper license
C3850-24-L-E	Cisco Catalyst 3850 24-port LAN Base to IP Services RTU paper license

Product number	Description
C3850-48-L-E	Cisco Catalyst 3850 48-port LAN Base to IP Services RTU paper license
C3850-24-S-E	Cisco Catalyst 3850 24-port IP Base to IP Services RTU paper license
C3850-48-S-E	Cisco Catalyst 3850 48-port IP Base to IP Services RTU paper license
L-C3850-24-L-S	Cisco Catalyst 3850 24-port LAN Base to IP Base RTU electronic license
L-C3850-48-L-S	Cisco Catalyst 3850 48-port LAN Base to IP Base RTU electronic license
L-C3850-24-L-E	Cisco Catalyst 3850 24-port LAN Base to IP Services RTU electronic license
L-C3850-48-L-E	Cisco Catalyst 3850 48-port LAN Base to IP Services RTU electronic license
L-C3850-24-S-E	Cisco Catalyst 3850 24-port IP Base to IP Services RTU electronic license
L-C3850-48-S-E	Cisco Catalyst 3850 48-port IP Base to IP Services RTU electronic license
L-C3850-12-S-E	Cisco Catalyst 3850 12-port IP Base to IP Services RTU electronic license
Access point licenses	
L-LIC-CT3850-UPG	Primary upgrade license SKU for Cisco 3850 wireless controller (e-delivery)
L-LIC-CTIOS-1A	1 access point adder license for Cisco IOS Software based wireless controller (e-delivery)
LIC-CT3850-UPG	Primary upgrade license SKU for Cisco 3850 wireless controller (paper license)
LIC-CTIOS-1A	1 access point adder license for the Cisco IOS Software based wireless controller (paper license)
Power supplies and fan for the Cisco Catalyst 3850 Series	
PWR-C1-350WAC=	350WAC power supply spare
PWR-C1-715WAC=	715WAC power supply spare
PWR-C1-1100WAC=	1100WAC power supply spare
PWR-C1-440WDC=	440WDC power supply spare
PWR-C1-BLANK=	Power supply blank spare
PWR-C3-750WAC-R=	750WAC power supply spare front-to-back airflow for 48XS
PWR-C3-750WAC-F=	750WAC power supply spare back-to-front airflow for 48XS
PWR-C3-750WDC-R=	750WDC power supply spare front-to-back airflow for 48XS
PWR-C3-750WDC-F=	750WDC power supply spare back-to-front airflow for 48XS
FAN-T3-R=	Fan module spare front-to-back airflow for 48XS
FAN-T3-F=	Fan module spare back-to-front airflow for 48XS
C3850-FAN-T1=	Cisco Catalyst 3850 and WLC 5760 Type 1 Fan Module
StackWise-480 and StackPower cables for the Cisco Catalyst 3850 Series	
STACK-T1-50CM=	Cisco StackWise-480 50cm stacking cable spare
STACK-T1-1M=	Cisco StackWise-480 1m stacking cable spare
STACK-T1-3M=	Cisco StackWise-480 3m stacking cable spare
CAB-SPWR-30CM=	Cisco Catalyst 3850 StackPower cable 30cm spare
CAB-SPWR-150CM=	Cisco Catalyst 3850 StackPower cable 150cm spare
Spare power cords for the Cisco Catalyst 3850 Series	
CAB-TA-NA=	AC power cord for Cisco Catalyst 3850 (North America)
CAB-TA-AP=	AC power cord for Cisco Catalyst 3850 (Australia)
CAB-TA-AR=	AC power cord for Cisco Catalyst 3850 (Argentina)
CAB-TA-SW=	AC power cord for Cisco Catalyst 3850 (Switzerland)
CAB-TA-UK=	AC power cord for Cisco Catalyst 3850 (United Kingdom)
CAB-TA-JP=	AC power cord for Cisco Catalyst 3850 (Japan)
CAB-TA-250VAC-JP=	Japan 250VAC power cord for Cisco Catalyst 3850 (Japan)
CAB-TA-EU=	AC power cord for Cisco Catalyst 3850 (Europe)
CAB-TA-IT=	AC power cord for Cisco Catalyst 3850 (Italy)

Product number	Description
CAB-TA-IN=	AC power cord for Cisco Catalyst 3850 (India)
CAB-TA-CN=	AC power cord for Cisco Catalyst 3850 (China)
CAB-TA-DN=	AC power cord for Cisco Catalyst 3850 (Denmark)
CAB-TA-IS=	AC power cord for Cisco Catalyst 3850 (Israel)
CAB-ACBZ-12A=	AC power cord for Cisco Catalyst 3850 (Brazil), 12A/125V BR-3-20 plug up to 12A
CAB-ACBZ-10A=	AC power cord for Cisco Catalyst 3850 (Brazil), 10A/250V BR-3-10 plug up to 10A
CAB-C15-CBN	Cabinet jumper power cord, 250 VAC 13A, C14-C15 connectors
Spare accessory and rack-mount kits for the Cisco Catalyst 3850 Series	
C3850-ACC-KIT=	Accessory kit for Cisco Catalyst 3850 Series
C3850-RAC-KIT=	Rack mount kit for Cisco Catalyst 3850 Series
C3850-4PT-KIT=	Extension rails and brackets for four-point mounting for Cisco Catalyst 3850 Series

Optics compatibility information

The Cisco Catalyst 3850 Series supports a wide range of optics. Because the list of supported optics is updated on a regular basis, consult the tables available here for the latest QSFP+, SFP+, and SFP compatibility information: https://www.cisco.com/en/US/products/hw/modules/ps5455/products_device_support_tables_list.html.

Cisco Capital

Financing to help you achieve your objectives

Cisco Capital® can help you acquire the technology you need to achieve your objectives and stay competitive. We can help you reduce CapEx. Accelerate your growth. Optimize your investment dollars and ROI. Cisco Capital financing gives you flexibility in acquiring hardware, software, services, and complementary third-party equipment. And there's just one predictable payment. Cisco Capital is available in more than 100 countries. [Learn more.](#)



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)